SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyrighted, 1888, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LIX.—No. 26. ESTABLISHED 1845. NEW YORK, DECEMBER 29, 1888. $3.00 A YEAR. WEEKLY.

NEW DYNAMITE GUN.

From time to time we have published accounts of the various experiments that have been made of late years in ordnance for the discharge of the high explosives. During the past eight years, the value of dynamite, gun cotton, nitro-glycerine, mercury fulminate, etc., for use in warfare, has been thoroughly appreciated, and the only problem to solve has been how to handle these explosives with less destruction to one's self than to the enemy. This has not been altogether so easy of accomplishment. It is believed that the problem of throwing large charges of explosives to a considerable distance has been accomplished by Capt. Zalinski's dynamite gun, in which the inertia of the shell in the gun is gradually overcome by subjecting it to a gradually increasing pressure of compressed air. The experiments to this end have been successful, and the shell leaves the muzzle of the gun at a very high rate of speed, while the initial shock is comparatively slight. Owing to the peculiar structure of the projectile used in this type of gun, the range is somewhat limited. We have also illustrated a dynamite gun in which common gun powder was used as the propelling power. In both of these guns the shell is made of a peculiar type, being adapted to take up the initial shock of discharge.

In the gun which is illustrated below, and which is the invention of Walter E. Hicks, of New York City, the danger of self-destruction from accidental explosion at discharge has been reduced to a minimum, as there is absolutely no shock, the shell being projected by the rotary motion of a revolving carriage. As this motion begins with a slow movement, gradually increasing in rapidity, there is no jar or shock until the projectile has been discharged and has come in contact with some obstructing object. The power that is employed to this end is centrifugal force—that force which bursts grindstones and tears them into a thousand pieces, and which dashes flywheels to destruction. It is that same force which, according to La Place, gives the planet Saturn her beautiful rings.

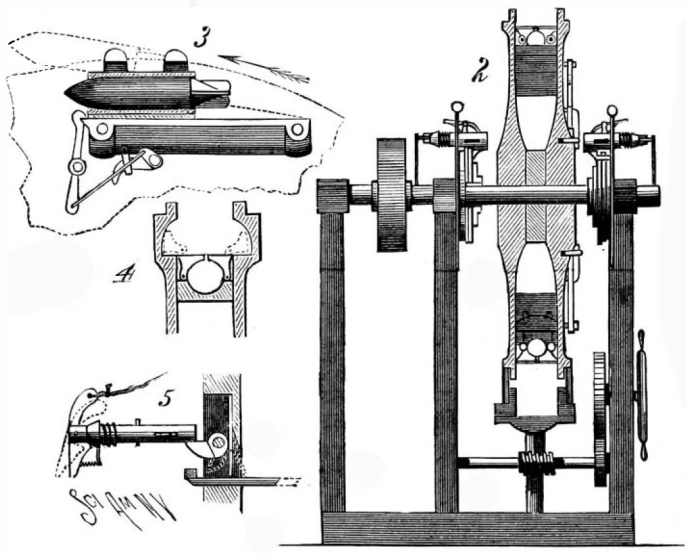

DETAILS OF DYNAMITE GUN.

The rotatable carriage from which the projectiles are discharged consists of two steel disk wheels (see detail) mounted parallel upon a shaft, which is provided with a pulley wheel for connecting it with a steam engine, or any high power motor, by means of which the carriage may be set at a high rate of rotation. These wheels are constructed thick and strong at the point at which they connect with the shaft, in order to resist the great strain, which is measured by the square of the velocity multiplied by the weight of the carriage. The gun represented in the cut is constructed for carrying four charges at a time, each of which may be discharged in rapid succession. The projectiles are inserted in carriers or chambers (see Figs. 3 and 4), which are arranged between the wheels at equal intervals from one another, and near the periphery of the wheels. The projectiles fit closely in these chambers, where they are firmly held until the instant of discharge by two doors, which lock and unlock automatically, and which hold the projectile in a vise-like grip.

The end of the carrier is journaled in the side of the wheels, and the other end is left free to oscillate in radial slots in the wheels. The free ends of these carriers are held down when loaded and locked by clutch bars meshing in teeth on the free ends, the clutches being attached to a shaft connected with the firing mechanism; when the gun is to be discharged, the clutch bars are released from the free ends of the carriers, which fly upward by reason of the centrifugal force exerted upon them, the doors fall automatically (see Fig. 4) into recesses in the sides of the wheels, and the projectiles, having received their momentum from the rotary motion of the carriage, are projected into space. As was observed, the carriers are pivoted at one end, which allows a certain amount of outward play, for the

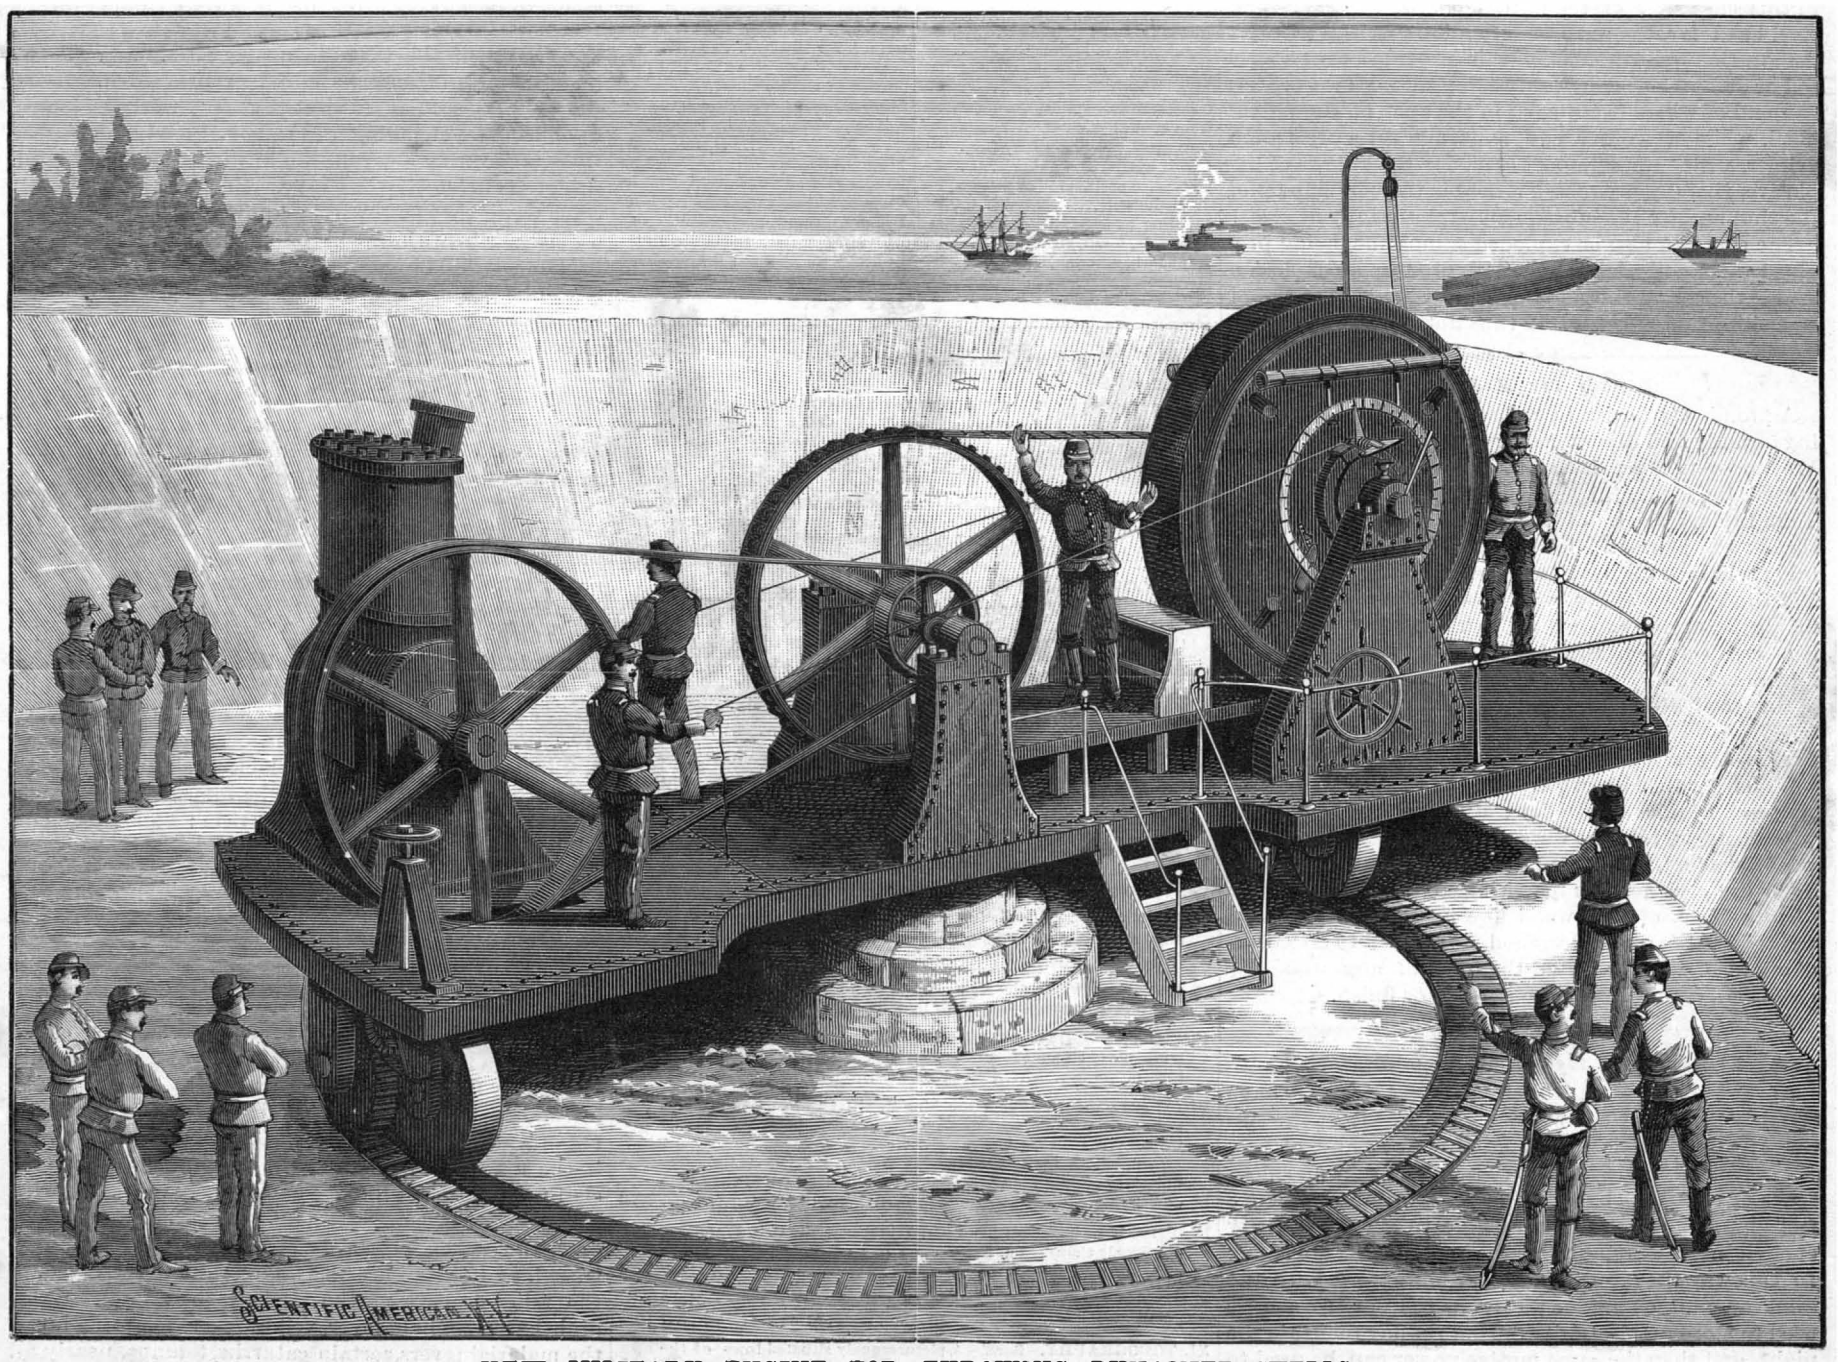

NEW MILITARY ENGINE FOR THROWING DYNAMITE SHELLS.

© 1888 SCIENTIFIC AMERICAN, INC.

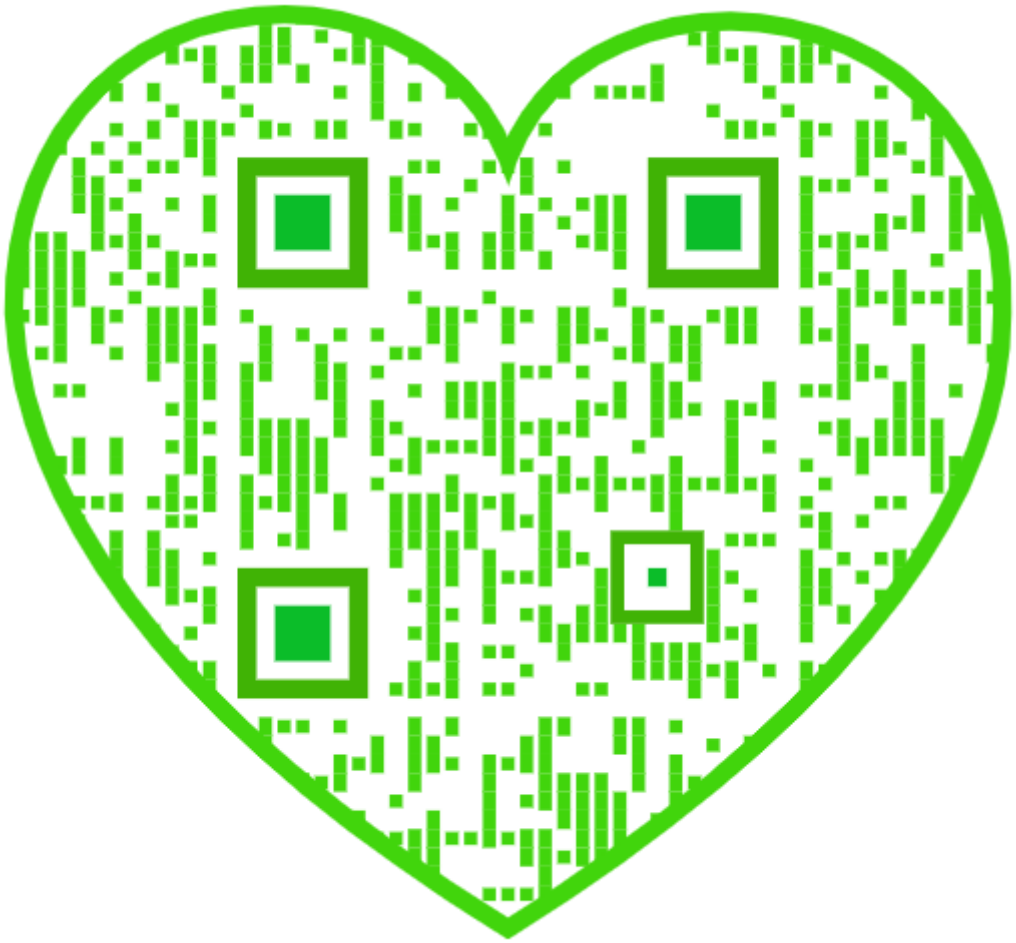

reason that when a body is suddenly set free from the outer edge of a revolving disk or carriage, that body, owing to the centripetal force, will follow a curved path, therefore, the projectile carriers are mounted to admit of a certain amount of outward play in order to counteract to a certain extent their tendency toward a curvilinear trajectory. The gun can be used as a mortar for high angle fire or close siege work, and is also adapted for long range. The journals on each side of the wheels are provided with flanges and concentric disks (see Fig. 2) which revolve on sleeves extending on the inside of the journals. These concentric disks have the firing bolts attached to the peripheries (see Fig. 5); and they are adjusted by caps and set screws to the journal flanges, the whole being surrounded by an annular rim, indexed with the degrees of two quadrants, so that by adjustment of the concentric disks, the alidades attached to the sleeves through which the firing bolts slide will point to the degrees of elevation or depression desired.

The gun can be discharged at any angle in the vertical plane, while the arc of fire in the horizontal plane is the same as in any other piece of ordnance. The tripping device on the rotary disk is arranged in such a way that the shell can be discharged at the point previously fixed upon; this being entirely arranged before discharge by the position of the quadrant. The tripping devices for two of the carriers are located upon the right hand disk, and those for the other two carriers on the left hand disk, whereby two of the shells may be discharged at a time, the other two being left in the carrier until it is desirable to discharge them. The four shells may be discharged in rapid succession, and the trajectory of each being practically identical, each successive shot will add to the destruction done by the preceding one. One peculiarity of the gun or engine, as it might perhaps more properly be called, is its comparative noiselessness. There being no expansion of gases and no vacuum, there is no report of any kind, the only sound being the whiz of the shell as it passes through the air. There is neither flash nor smoke, report nor recoil, and there is nothing to apprise an enemy of the whereabouts of the gun, and the destroyer might come in the midst of an enemy unseen and unheard. It is hoped that a thorough trial of this new gun will be made, from which data may be obtained concerning the efficiency, range, and practicability of this as a weapon of warfare.

The combination shot and shell designed to be used in this engine is of regulation shape, having a solid steel head for the purpose of producing the greatest penetration upon impact. It is provided with a steel rod or precussion striker, extending through the center, one end of which is adjusted in the apex of the ogival head, while the other end rests against a precussion primer, which upon impact explodes the charge of explosive, thereby producing a double blow by impact of the shot and by the subsequent explosion.

The shot can also be exploded submarine, being provided with a device which will produce an explosion in case the target should be missed. Should that target be a ship, that effect would thus not be wholly lost.

Finish for Redwood.

A prominent dealer in redwood supplies the following formula and directions for treating redwood finish. We understand it is a practice that has been indorsed by successful experience in San Francisco. Take 1 quart spirits of turpentine, add 1 pound corn starch, add ¼ pound burnt sienna, add 1 tablespoonful raw linseed oil, add tablespoonful of brown japan. Mix thoroughly, apply with a brush, let it stand say fifteen minutes, rub off all you can with fine shavings or a soft rag, then let it stand at least twenty-four hours that it may sink into and harden the fibers of the wood; afterward apply two coats of white shellac, rub down well with fine flint paper, then put on from two to five coats best polishing varnish; after it is well dried rub with water and pumice stone ground very fine, stand a day to dry; after being washed clean with chamois, rub with water and rotten stone, dry, wash as before, clean, and rub with olive oil until dry. Some use cork for sandpapering and polishing, but a smooth block of hard wood like maple is better when treated in this way. Redwood, according to a Californian's idea, will be found the peer of any wood for real beauty and life as a house trim or finish.

Lighting by Means of Accumulators.

At Springfield, Mass., the electric light company have recently put into their works on Taylor Street the system of the Electrical Accumulator Company, of New York, composed of 378 large cells, which take up a floor space of about 20 by 15 feet, and they stand about 8 feet high. The company are able to store electricity enough in the accumulators to run 500 lights ten hours. In this way they are able to do more work with the same amount of engine power, as the engines can be used to store up electricity during the day for use in the night, and then the same motive power can be used to propel the arc dynamos at night.

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S. or Canada..... $3 00
One copy, six months, for the U. S. or Canada..... 1 50
One copy, one year, to any foreign country belonging to Postal Union, 4 00
Remit by postal or express money order.

Australia and New Zealand.—Those who desire to receive the SCIENTIFIC AMERICAN, for a little over one year, may remit £1 in current Colonial bank notes. Address
MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for U. S. and Canada. $6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to any address in U. S. or Canada, on receipt of *seven dollars*.

The safest way to remit is by draft, postal order, express money order, or registered letter.

Australia and New Zealand.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for a little over one year on receipt of £2 current Colonial bank notes.

Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

NEW YORK, SATURDAY, DECEMBER 29, 1888.

Contents.

(Illustrated articles are marked with an asterisk.)

Absorption of gas by charcoal*.. 402
Amphibian of coal period... 401
Bridge, railway, at New London, Conn..... 404
Cement, hydraulic, manufacture of..... 401
Churn, Campbell's*..... 402
Cohesion*..... 402
Collisions in fogs..... 401
Dinotherium, Pikermi*..... 407
Dogs that learn trades..... 400
Drying, vacuum..... 407
Eels that scale precipices 403
Energy and vision 405
Engineer, steam, working..... 405
Enquiries to be answered..... 406
Equilibrium of liquids*..... 402
Experiment, cotton and alcohol* 402
Exposition, floating, new..... 405
Gear, steering, steam, Turner's*. 403
Gun, dynamite, new*..... 399
Gun, steel, new, bursting of..... 401
Invest wisely, how to... 405
Ladder, portable extension, Piche's*..... 402
Lighting by accumulators..... 400
Mammals, fossil, gigantic*..... 407
Mammoth, Siberian, skeleton*... 407
Medicine, possible revolution in. 400
Needle threader, Scherkenbach's* 405
Negatives, reproduction..... ... 405
Offset mechanism for sawmill carriages, Rosenberg's*..... 403
Oil, coal, and natural gas..... 407
Organ, large..... 402
Photos., printing in colors..... 404
Physics, simple experiments in*. 402
Plant, steel, a great..... 403
Powder, grain, size*..... 406
Prisons, Japanese, mfs. in..... 401
Reduction of volume by mixture* 402
Redwood, finish for..... 400
Replies to enquiries..... 408
Rifle, cast steel, test of*.. 406
Rifle, 8 in. cast steel before trial 406
Rotator for lantern*..... 402
SCIENTIFIC AMERICAN for 1889.. 401
Section of rotator*..... 402
Shed, wreck, after explosion*.... 406
System, underground, Brooks, in Brooklyn..... 407
Trees, Christmas..... 404
Tunnel, St. Clair, new..... 402
Viaduct, Garabit*..... 403
Viaduct, Garabit, anchorage*.... 403
Viaduct, Garabit, springing of arch*..... 404
Viaduct, Garabit, testing*..... 403

TABLE OF CONTENTS OF

SCIENTIFIC AMERICAN SUPPLEMENT

No. 678.

For the Week Ending December 29, 1888.

Price 10 cents. For sale by all newsdealers.

PAGE

I. BIOLOGY.—The New Institut Pasteur.—The new laboratory for conducting Pasteur work in biological science.—2 illustrations..... 10825
The Salmon Fisheries of the Columbia River.—Continuation of this graphic and interesting contribution to economic biology.—8 illustrations..... 10828

II. CIVIL ENGINEERING.—The Water Supply at Tokyo, Japan.—By Y. NANAJIMA.—An ancient Japanese waterworks, with curious details of its construction.—4 illustrations..... 10826

III. ELECTRICITY.—On Ocean Temperatures in Relation to Submarine Cables.—By WM. LANT CARPENTER.—The effect of the temperatures of the ocean upon the insulation resistance of cables.—An important and interesting investigation..... 10827

IV. FINE ARTS.—Monument to Columbus at Barcelona.—An elaborate description of the new monument to Christopher Columbus.—Its architectural features and the hydraulic lift.—10 illustrations 10823

V. MECHANICS.—A Conical Drum Windlass.—An interesting modification of the differential windlass.—2 illustrations..... 10827

VI. MISCELLANEOUS.—A Russian Railway Accident.—The recent accident in which the Czar of Russia was nearly killed, and in which twenty persons lost their lives.—2 illustrations..... 10827

VII. NAVAL ENGINEERING.—The Paddle Steamer Honam.—A remarkable craft built for trading on the Canton River in China.—1 illustration..... 10826

VIII. PHOTOGRAPHY.—Retouching Negatives.—Practical description, with formula, of this all-important detail of photographic work..... 10834
Toning Bath for Imparting Cold Tones to Prints on Gelatino-Chloride of Silver Paper.—Formula for a toning bath of the above description.—Particulars of its use..... 10834

IX. PHYSICS.—The Universality of Vibrations.—By C. C. HASKINS.—A deeply thought out paper upon one of the recent developments of physical science..... 10831

X. TECHNOLOGY.—Manufacture of Chlorine.—Weldon-Pechiney process.—Notes upon an experimental trial of this process..... 10825

XI. TOPOGRAPHY.—Banff.—A picturesquely situated town of the "Canadian National Park."—Description of its sanitarium and mineral waters.—1 illustration..... 10831

DOGS THAT LEARN TRADES.

The dog corps, long since established in the French army, has been recently much increased, so efficient have these little soldiers become. At an early stage of the trials they gave satisfaction as advanced posts, scenting or hearing a stranger approaching even in the darkness, and quickly learning the difference between a friendly and a foreign uniform. The latest trick the military dog has learned is that of carrying dispatches between distant sections of an army or reliefs or reenforcements presumably advancing through hostile country. The system is an offshoot of the dog smuggler system, which is described in the current number of *Blackwood's*, and the steps by which the animals are taught to understand what is wanted of them are best shown by reference to that article.

The smuggler in broad day walks across the frontier, his dog by his side, leaving the latter at the house of his accomplice and returning without him. When night falls, the dog is given a beating and turned loose to find his way home. Next he has a small packet fastened to his collar, and gradually the burden is increased. Then half a dozen or more are employed at the same time; the most intelligent being given no burden, that he may the more readily act as a scout for the others. He goes ahead, they keeping well back, till he gives them the signal that the coast is clear. The customs dog from its earliest years is made to play hide and seek with bags of coffee, rolls of lace, packages of tobacco, and the like. They do not bark, being taught to sit silently in ambush and give a low growl or simply cock up their ears and point the true direction of the advancing pack.

The French army dogs, mastiffs, like the smugglers' dogs, though first they must be taken from point to point to find them again, when they get to understand the idea, and what is wanted of them, will find a distant column or command with little difficulty if given the general direction, unless it be at too great a distance, and carry messages to and fro with commendable zeal.

"A POSSIBLE REVOLUTION IN MEDICINE."

Most people have read of the bacteria and of the discoveries concerning them made by Pasteur and Koch. The subject seems generally to be regarded as belonging to the doctors—an interesting phase of the progress of our time and something for students to sit up late over, but not directly interesting to lay minds. This seems to be a grave error, for, in a recent paper on "A Possible Revolution," Dr. Austin Flint says that by a knowledge of the bacteria nearly all human ills of a physical nature may be cured or prevented. Hence there is no secular subject that may fairly be looked upon as more engaging and timely. Slowly, but surely, there is working a revolution in the science and practice of medicine and surgery. He thinks a time will come when the cause will be known of every infectious disease; when they will be preventable, or having broken out, will be easily curable; and, best of all, when it will be possible for the intelligent physician to afford protection against all such diseases as scarlet fever, measles, yellow fever, whooping cough, etc.

Indeed, there need not be any epidemics, and even constitutional diseases will be curable if only the progress in the science of bacteriology should go on at the present rate, because, in a figure which the Doctor borrows from the French, "The higher one ascends, the further off seems the horizon." That is to say, the further we go in bacteriology, the greater appears the promise. In the last few years there has been a really remarkable advance, "an evolution of knowledge," the author calls it. There is "Pasteur's work with the fermentations, his discovery of the microbe which breeds in the silkworm a peculiar disease, and especially the isolation of the microbe of the carbuncular disease of sheep—which sometimes attacks man. These give a powerful impulse to the study of bacteriology." Koch's part in the bacteriological era would seem, from what our author says, to be somewhat similar to that of Ampere in electro-magnetism; he supplemented Pasteur's discovery, as Ampere did Oersted's.

Bacteria, which are now known to be vegetable and not animal growths, are to be found in large numbers in the intestines even of the most healthy, and it is in knowing the nature and habit of these that will enable the student to prevent their inroads when the condition of the system leaves it disarmed. Even now, so we are told, consumption can no longer be called incurable, fermentive indigestions are successfully treated by means of a class of remedies known as disinfectants. In many of the skin diseases is found an organism at work; in diphtheria the germs are at work in the mucous membrane. In both cases the physician now addresses himself particularly to dealing with these germs. Among the diseases in which, our author says, the presence of bacteria has already been surely traced, and their influence depressed or destroyed, to the relief or cure of the patient, are: Tuberculosis, diphtheria, typhoid fever, yellow fever, relapsing fever, the malarial fevers, certain catarrhs, tetanus, nearly all contagious and skin diseases.

© 1888 SCIENTIFIC AMERICAN, INC.

The Scientific American for 1889.

READ WHAT THE PUBLISHERS SAY.

The increasing circulation of the SCIENTIFIC AMERICAN enables the publishers to improve the paper every year, while the subscription rates are kept at the lowest possible figure. The year just closing bears witness to these facts; and with a still further increase of patrons for the coming year, which we are encouraged to expect, still greater improvement may be expected. We look upon our readers as our friends, for whom we are willing to devote our time and our best energies, and for enquirers through our "Notes and Queries" column we do incur large expense to secure accurate information. The recipes and directions offer practical hints in engineering and physics and in every department of science. The large number of beautiful wood engravings which embellish each number of this paper speak for themselves; in fact, our tens of thousands of regular patrons, some of whom have taken the SCIENTIFIC AMERICAN from its infancy, more than 40 years ago, know without being told how the quality of the paper has advanced with its years, until it has attained an eminence and circulation to which none other of its class at home or abroad approximates. We would remind our readers that this number closes a volume, and with it the subscription of several thousands of our patrons expires, and before the end of another week we trust that every one will not only renew his own subscription, but include some friend, the manager of his works, some worthy employe, an apprentice, or some bright boy who has a taste for mechanics or some special department of science. It will make a useful as well as an acceptable New Year's gift, and the recipient every week for a whole year will be reminded of the donor's good deed, and will, undoubtedly, be a more intelligent and better man from the instruction he will derive from its weekly perusal. Price only $3 a year, and for so small a sum we shall feel disappointed if several thousand more names are not entered on our subscription books for 1889 than were recorded in 1888.

Bursting of the New Steel Gun.

Before this gun was tested I predicted that it or any other cast steel gun would be a failure. My reasons for this were that no cast steel gun could be made that the metal would be of regular tension. In 1869 I visited the steel works of Mr. Krupp, in Essen, Prussia, where I was at that time fortunate enough to see them forging the largest ingot of steel that, up to that time, had ever been made in the world. It weighed 82,500 pounds, and was being forged under the then largest and heaviest steam hammer ever made, the hammer of which alone weighed more than 50 tons, and struck a blow of more than 100,000 tons; when forged, one-third of the upper or pipe end of the steel was cut off.

Mr. Krupp explained that no mass of molten metal of near that size would be of uniform tension when cooled, because the outside must cool faster than the center, and shrink on it like a band shrunk on it. Then the center shrinks from that in cooling. He also said that, in order to forge the steel for a gun, it was necessary that a steam hammer be of sufficient weight to move the metal clear to the very center at every blow in order to leave it of uniform tension; that if a hammer that was itself too light, in forging that the outside would be enlarged more than the center, and it would be also of unequal tension.

During the war I lived in Trenton, N. J. At that time a gentleman, then living in New York, received an order for a cast iron cannon to be of 8 inch bore. The cannon was constructed with deep spiral ribs extending around the breech, and it was of immense weight. It was taken about three miles below Trenton in a dugout made by the Camden and Amboy Railroad Company for a fill in building the road. It burst at the first charge, the breech going into three pieces, one, weighing many tons, more than half a mile into an oat field. I was on the ground on the Sunday after and saw the wreck.

During the war I was in Washington, and in front of the war department building was a Rodney gun. It was a gun made by shrinking rings over the breech to a little below the charge. While I stood there, among numerous other curious visitors, and all apparently admiring the gun, Fred Sickles, of Sickles cut-off, came up and looked it over. A gentleman in the crowd said: "Mr. Sickles, what do you think of it?" Said he, "Well, it will never stand seven charges. It will crystallize by unequal tension right where the rings terminate."

I had the curiosity to watch the result of the first Rodney gun. It was put on the Naugatuck and burst, just as Sickles said it would, at the fifth round.

I am, therefore, of opinion that no cast gun will ever be a success. Failure will not be in consequence of imperfect annealing, but of improper tension.

J. E. EMERSON.

Collisions in Fogs.

In his annual report to the National Board of Steam Navigation, President Cheney shows that there were in 1887, 84 casualties to vessels from collisions in fogs; 100 in 1886, 120 in 1885, 92 in 1884, and 59 in 1883. He gives a statement by Captain H. C. Taylor, U. S. Navy, who says:

The general idea on shore and among seafaring people who do not reflect and observe closely is that, if you are going slower, you can stop easier; if going at a high rate of speed, it takes longer; but the real fact is that, for all purposes of avoiding impending collisions, it is impossible to stop at all when at high speed, within any period needed to avoid collision.

Those who have practically tried it, know that when a large seagoing vessel is rushing through the water 12 or 13 knot speed, that the first effect of the propeller or paddle wheels backing is in no way perceptible. The momentum of the ship begins to be lost by the natural resistance of the water, and when checked somewhat, the effect of the screw commences to be felt, and not before. No heavy vessels (whose momentum becomes so great as their speed increases) should go more than six knots per hour in a thick fog, if they hope to avoid collision; and a speed of eight to nine knots renders avoidance impossible.

The investigations and experiments of Captain Colomb, R.N., with many steam screw vessels, of different size, and moving at different speed, show that the average distance in which a steamer will stop after suddenly reversing the engines is four and one-half times the ship's length.

Some experiments made with the SS. **Aurania**, 480 feet long, and moving at a speed of **thirteen knots**, showed that she came to a dead stop in **three** and six-tenths times her length, after reversal of the engines.

The case of the Aurania is a very favorable one, and indicates that, though not at full speed, she stopped in one-third (1,728 feet) of a mile. All of us who are familiar with thick fogs will realize the uselessness of stopping only after one-third of a mile has been covered.

Experiments with the SS. Oregon gave the same results; the time to come to a dead stop being 3 minutes and 59 seconds.

The mean results of many trials with different sized vessels, and moving at different speeds, show that to stop a vessel in the shortest possible space, the helm should be put hard over the instant the engines are reversed. If this is done, the vessel will lose way and come to a state of rest when she has changed her heading four points. She will then have moved ahead a little less than *three times her length*, and will have transferred *one length*; that is, her stern will be just clear of her original course.

The dragging action of the rudder, as mentioned above, is well known to all seafaring people, and can generally be utilized to avoid collision, unless danger exists on both bows. But we must remember that the above results were obtained largely in quiet weather and smooth water; and a strong breeze or rough sea is liable to alter the above results as to the movement of the ship's head.

Manufacture of Hydraulic Cement.

According to Dr. Michaelis, the foremost cement expert now living, the raw materials, when dried at 212° F., consist essentially of 75 to 79 percentum (by weight) of carbonate of lime and 24 to 20 per cent of silicate of alumina (clay). These, when burned, represent 62½ to 67 per cent of lime and 33½ to 29 per cent of silicates (silica, alumina, oxide of iron), leaving 4 per cent for accessories. After the hardening of the hydrated cement, a transformation, by complicated reactions, has taken place into hydrated silicate of lime, as the most important ingredient, in hydrated aluminate of lime, ferruginous lime, hydrate of lime, basic sulphate of lime, and carbonate of lime.

Some of the phases during the burning, as well as during the hardening process, are of interest and importance.

The constituents being pulverized are mixed into a homogeneous paste, balled, dried, and burned by exposure to a quick white heat, equal to the melting point of wrought iron. This causes first the expulsion of the chemically bound water and carbonic acid, and next a softening of the whole mixture. During the calcination alumina and oxide of iron, which acted in the clay as bases, assume the role of acids toward the lime, the calcined oxide of iron acting as a flux in the fire. A preponderance of alumina favors the production of a quick-setting cement, while an increase of iron has the opposite effect, since it arrests the eager absorption of water by the lime, which causes it to swell.

When partial vitrification sets in the heat is promptly stopped, since a higher heat or a continued oxidizing heat of the normal temperature will ruin the cement, which now requires rapid cooling as much as it did a quick heat before. At this stage the softened lime is alloyed with the softened clay, while neither is in fusion yet. A disposition for the formation of new combinations of lime, with silica, alumina, and oxide of iron, is induced without allowing these nascent combinations to be fully consummated, because they, as crystalline bodies, would impede the subsequent hydration and the dense interlocking of the molecules during the setting or crystallization processes. Under these conditions the lime, though not chemically combined, is engaged and kept out of harm's way.

The high temperature of the kiln has gradually condensed the mass and most prominently the silica. The globular texture attained in moderate heat was simultaneously transformed into a laminated semi-vitreous texture.

The Portland cement owes its high reputation largely to such physical changes. Globular texture makes contact by points, while laminated texture achieves more intimate contact by surfaces. In our case it secures in strata of height 50 per cent more cementing substance than a mass of globular particles.

This close packing intensifies cohesion, of which the high tensile strength is the exponent. After cooling the clinkers are ground to impalpable, dense, drossy, steel-hard powder, having a specific gravity of 3·0 to 3·15. A few weeks' storage seasons the product and makes it ready for use.

Manufactures in Japanese Prisons.

A visitor to a Japanese prison in Tokio thus recounts, in the *Pottery Gazette* (London), a portion of his experiences: Then we visited a workshop where *jinrikishas* were being made, then one where umbrella handles were being elaborately carved, then one where every kind of pottery, from the rough porous bottle and jar to the egg-shell teacup, was rolling from a dozen potters' wheels, and then came the great surprise. Two days previous I had visited the house of the most famous maker in Japan of the exquisite *cloisonne* ware—the enamel in inlaid metal work upon copper—who rivals in everlasting materials the brush of Turner with his pigments and the pencil of Alma Tadema with his strips of metal. And I had stood for an hour behind him and his pupils, marveling that the human eye could become so accurate, and the human hand so steady, and the human heart so patient. Yet I give my word that here in the prison at Ishikawa sat not six but sixty men, common thieves and burglars and peace breakers, who knew no more about *cloisonne* before they were sentenced than a Hindoo knows about skates, doing just the same thing—cutting by eye-measurement only the tiny strips of copper to make the outline of a bird's beak, or the shading of his wing, or the articulations of his toe, sticking these upon the rounded surface of the copper vase, filling up the interstices with pigment, coat upon coat, and fixing and filing and polishing it until the finished work was so true and so delicate and so beautiful that nothing except an occasional greater dignity and breadth of design marked the art of the freeman from that of the convict, *C'etait a ne pas y croire*—one simply stood and refused to believe one's eyes. Fancy the attempt to teach such a thing at Pentonville or Dartmoor or Sing Sing! When our criminal reaches his prison home in Tokio, he is taught to do that at which the limit of his natural faculties is reached. If he can make *cloisonne*, well and good; if not, perhaps he can carve wood or make pottery; if not these, then he can make fans or umbrellas or basket work. If he is not up to any of these, then he can make paper, or set type, or cast brass, or do carpentering. If the limit is still too high for him, down he goes to the rice mill, and seesaws all day long upon a balanced beam, first raising the stone-weighted end, and then letting it down with a great flop into a mortar of rice. But if he cannot even accomplish this poor task regularly, he is given a hammer, and left to break stones under a shed with the twenty-nine other men out of 2,000 who could not learn anything else.

Amphibian of the Coal Period.

Professor Bickmore, in a recent lecture on "The Period of Reptiles and Mammals," in the Museum of Natural History, this city, presented on a screen illustrations of the footprints of one of the amphibians of the coal period. The illustration was a drawing from the great slab of bluestone which belongs to the museum, and was taken from the stone quarry at Turner's Falls, Mass. The animal itself, Mr. Bickmore explained, was one of those which roamed in great numbers along the Connecticut Valley during the carboniferous period. This one had left its footprints in the mud, and the impression having been subsequently filled with sand, the cast was preserved when the clay became hardened into stone.

From fossils of the animal, which have been obtained in other portions of the valley, it appears to have had an elongated body, about fourteen feet long, on four legs. It moved mainly on the hind feet, the fore legs being shorter, and lived partly in the water and partly on the banks of the stream.

© 1888 SCIENTIFIC AMERICAN, INC.

SIMPLE EXPERIMENTS IN PHYSICS.

BY GEO. M. HOPKINS.

The engravings represent a few examples of the projection of simple physical experiments upon the screen. Besides a lantern, a few glass tanks with parallel sides will be required. These are preferably, but not necessarily, made of three pieces of plate glass, one a thick piece, having the shape of the cavity cut out of it, the

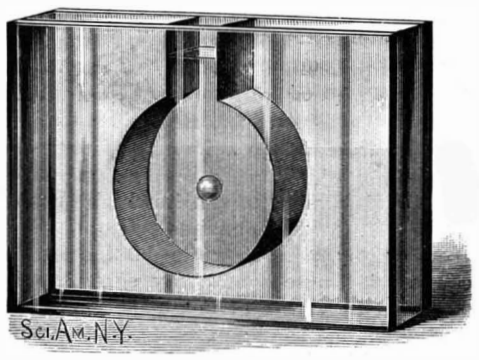

Fig. 1.—COHESION.

others simply flat pieces, attached to opposite sides of the first by means of marine glue or other suitable cement.

A cell made of plates of glass clamped on opposite sides of a bent rubber strip serves a good purpose. It is a great convenience to have several of each kind, so that preparations for projection may be made at leisure.

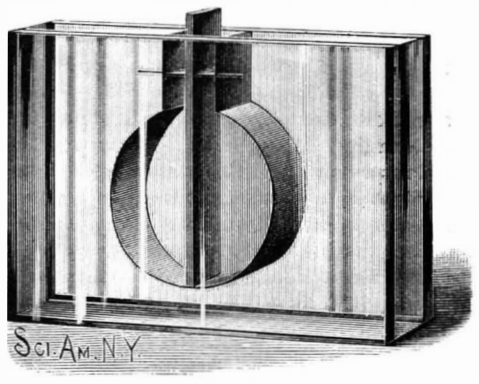

Fig. 2.—REDUCTION OF VOLUME BY MIXTURE.

In Fig. 1 is shown the well known experiment illustrating cohesion. In the tank is placed a mixture of alcohol and water, having the same specific gravity as olive oil. Into the mixture is very carefully introduced a globule of olive oil, which may be colored or not. The oil assumes a perfectly spherical form, and produces a very interesting image on the screen.

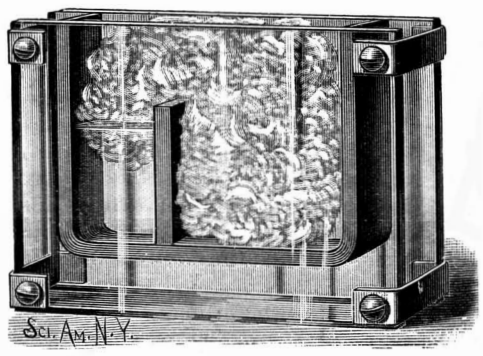

Fig. 3.—COTTON AND ALCOHOL EXPERIMENT.

In Fig. 2 is shown the method of projecting the experiment in which the volume of equal parts of alcohol and water is less when they are combined than it is when they are separate. The tank has a large chamber with a narrow neck. The chamber is divided in the center by a removable partition having soft rubber

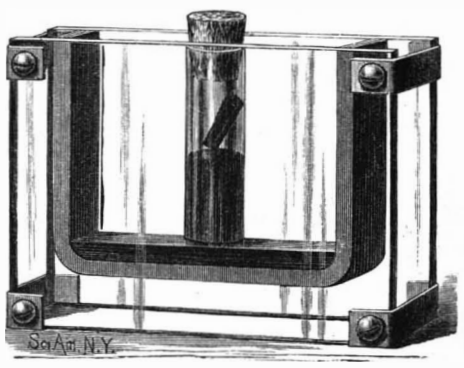

Fig. 4.—ABSORPTION OF GAS BY CHARCOAL.

edges. Water is introduced into one division of the chamber, and slightly colored alcohol is placed in the other division. The water and the alcohol are level with a mark on the glass. On turning the partition, the water and alcohol mix, and the level of the mixture immediately falls some distance below the mark on the glass. After a thorough mixture of the liquids, the partition may be replaced in its first position.

By arranging a tank with a partition near one end, as shown in Fig. 3, the experiment in which a large amount of cotton is introduced into a vessel filled with alcohol, without causing it to overflow, may be repeated so as to show it on the screen. The smaller compartment of the tank is filled with alcohol, and in

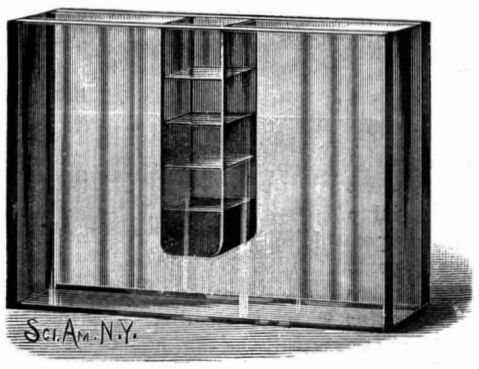

Fig. 5.—EQUILIBRIUM OF LIQUIDS.

the larger compartment is placed a quantity of loose cotton. This is gradually transferred from the larger to the smaller compartment, by means of a pair of fine tweezers, without causing the alcohol to overflow.

The absorption of gases by charcoal is readily shown in the manner illustrated in Fig. 4. A glass tube, open at both ends, is dipped in mercury contained in the bottom of the tank. A cork is fitted to the upper end of the tube. Carbonic acid is poured into the tube, then a piece of freshly heated charcoal is dropped in, and the cork is instantly replaced. The charcoal absorbs the gas rapidly, creating a partial vacuum, which causes the mercury to rise in the tube to a considerable height.

In Fig. 5 is shown a tank containing four liquids of different densities, the densities decreasing from the bottom upward. This is simply the well known experiment of the "vial of four elements." The liquids are mercury, a saturated solution of carbonate of potash in water, colored alcohol, and kerosene oil. This simple experiment is very interesting when performed in the usual way; but when it is projected upon the screen, the struggle of the different liquids to regain equilibrium, after having been thoroughly stirred up, is striking.

A Large Organ.

A correspondent of *La Science en Famille* states that in the Protestant church at Libau (Russia) there is an organ which occupies the whole width of the church, about 60 feet, and which has 131 registers, 8,000 pipes, and 14 bellows of large size. It has 4 harpischords and one pedal. The largest pipe is formed of planks 3 inches thick and 31 feet in length, and has a section of 7 square inches, and weighs 1,540 pounds. Besides the 131 registers, there are 21 accessory stops that permit of combining various parts of the instrument without having direct recourse to the registers. By a special pneumatic combination, the organist can couple the four harpischords and obtain surprising results. For the sake of comparison, the following large instruments of this kind may be cited: Organ of the Cathedral of Riga, 125 registers; Garden City Cathedral 120; St. Albert Hall, London, 100; Cathedral of Ulm 100; St. George's Hall, Liverpool, 100; Notre Dame, Paris, 90; Boston Cathedral 86; Cathedral of Schwerin 85; St. Nicholas Church, Leipzig, 85; Cologne Cathedral 42.

The New St. Clair Tunnel.

The St. Clair tunnel from Port Huron to Sarnia is making fair progress. Instead of driving from intermediate shafts, work has been started at the portals, which are now just being dug out. The total length from portal to portal is about 4,620 feet, of which 2,400 feet is under the river, which is here 42 feet deep. The distance of the roof of the tunnel below the bed of the river averages about 25 feet. The material is blue tenacious clay throughout, plastic and putty-like in consistency. About 150 men are now at work. It does not appear likely that any considerable trouble will arise from water, although there may from gas, which at points is encountered under high pressure, but small volume, so that it soon exhausts itself. The adopted section is a circle of 20 feet 4 inches outside, 19 feet 10 inches inside the clear, the lining being cast iron segments 2 inches thick, 6 inch flanges, 18 inches wide; 14 segments and a key-piece about 10 × 18 inches completing the circle. A cast steel shield, 15 feet × 21 feet 4 inches, is driven in front by a hydraulic pressure of 3,000 tons from twenty-four jacks, 10 in. × 26 in. Two 30 H. P. Roots blowers are to supply air, two 50 H. P. Lidgerwood engines do the hoisting, two 100-light incandescent light plants supply illumination, and the plant generally is on a very liberal and adequate scale.

The grades into and out of the tunnel are 2 per cent for about 3,000 feet at each end. The cost of the tunnel is likely to be high, say $2,250,000, the metal lining being very expensive; 800 tons of bolts alone will be required. The material is so fluid that it is practically impossible to make an open cut even 60 feet deep for the approaches.—*Engineering News.*

AN IMPROVED CHURN.

The accompanying illustration represents a light and simple form of churn, designed to be very effective in operation, for the invention of which a caveat has recently been filed in the Patent Office, by Mr. Robert

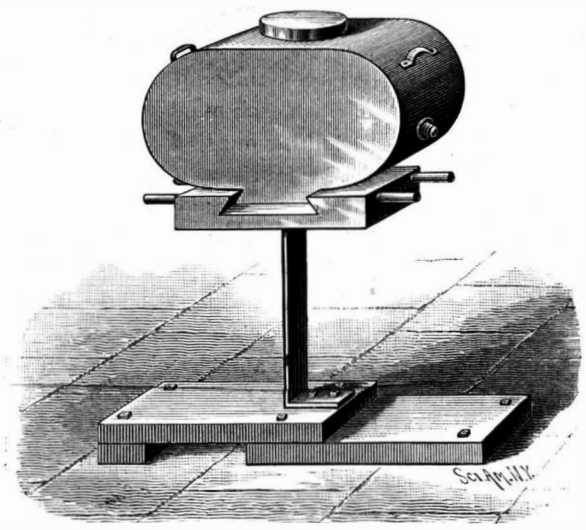

CAMPBELL'S CHURN.

Campbell, of Mancelona, Mich. The base is made in two parts for convenience in shipping, and on the base is secured an arm carrying at right angles a vertical spring plate, to the upper end of which is attached a support for the cream-holding vessel. This support has handles at each end, and has a central dovetailed groove in which fits a dovetail formed on the under side of the cream-holding vessel, the latter being preferably made in the shape of a boiler placed on one side, a cap screwing on the top opening, for filling the vessel and removing the butter, while there is an opening near the bottom for drawing off the buttermilk. The churning is performed by pulling either of the handles in one direction to bend the spring plate, on letting go of which the plate rebounds and the cream in the vessel receives a concussion, this operation being repeated as often as necessary until the butter is made.

AN IMPROVED EXTENSION LADDER.

An extension ladder which may be quickly and conveniently elevated and inclined toward a given object, and which can be readily transported from place to place, has been patented by Mr. Simeon Piche, of 305 West Superior Street, Duluth, Minn., and is illustrated herewith, the small view being a side elevation of the ladder when folded down for transportation. The device has two stationary sides, consisting of inclined uprights united by a crossbar, the longer upright having on its inner face a longitudinal bracket provided with a series of apertures. Near the upper end of the other upright is pivoted a lever arm, the handle end of which rests in the bracket on the longer upright, and is adapted to reciprocate, or to be held at any desired point. Upon the upper edge of each of the lever arms a curved beam is secured, the ends of the beam being attached to the lever arms within the standards, and from these curved beams, at each side of their center, a standard is downwardly projected, plates being secured upon these standards to constitute ways upon which rack-bars are adapted to slide. A transverse shaft through

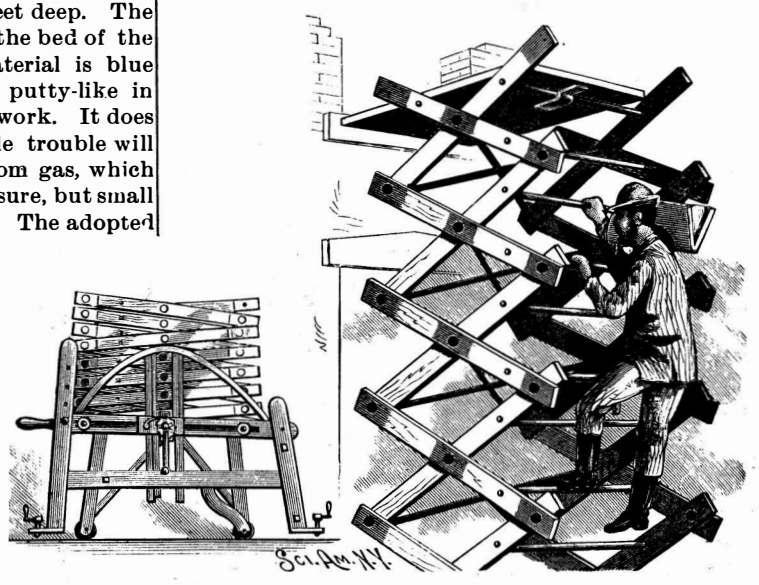

PICHE'S PORTABLE EXTENSION LADDER.

© 1888 SCIENTIFIC AMERICAN, INC.

the center of the lever arms has a crank arm at each end for rotating the shaft, upon which are pinions, one pinion adapted to engage and reciprocate the approaching racks on each side of the ladder frame, while upon one extremity of the shaft a ratchet wheel is secured, adapted to be engaged by a pawl pivoted to the outer face of one of the lever arms. The ladder proper is made up of a series of rectangular frames arranged to form lazy-tongs, each frame having near its forward ends a round, the rounds being in vertical alignment when the ladder is extended or elevated. The ladder is elevated by means of the crank handles on the transverse shaft, when the sliding rack operates to extend the several sets of lazy-tongs, the lever arms affording the means of inclining the entire ladder to the rear as far as desired. A platform is usually provided for the top of the ladder, the platform having hooks adapted to encircle one of the upper rounds. From the lower set of lazy-tongs are projected legs, provided with wheels, these legs being drawn from the ground when the ladder is elevated, and the ladder then resting upon its fixed frame, but when the ladder is folded down these legs assume an essentially perpendicular position, and form supports whereby the ladder may be guided on its wheels in any direction.

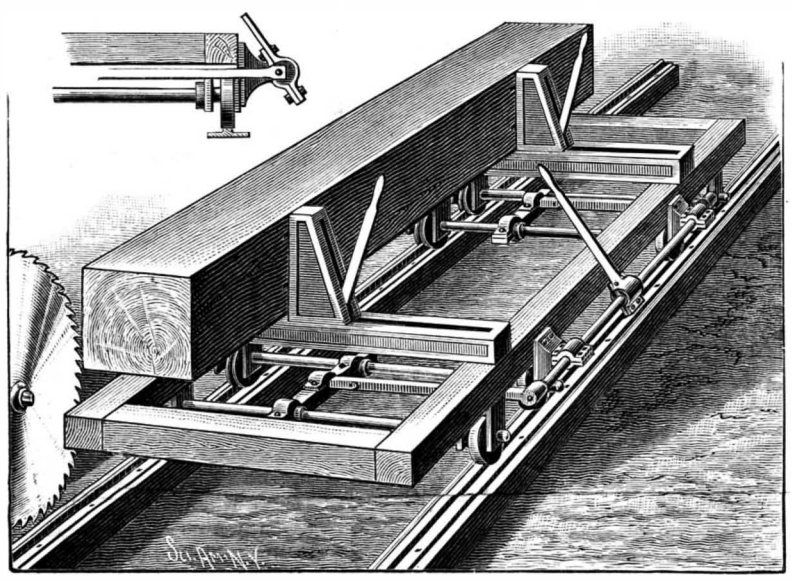

ROSENBERG'S OFFSET FOR SAWMILL CARRIAGES.

OFFSET MECHANISM FOR SAWMILL CARRIAGES.

A simple and conveniently manipulated device, whereby the log frame and mechanism carried thereby on sawmill carriages may be shifted bodily in a line at right angles to the line of travel by the carriage, preparatory to "jigging back," is illustrated herewith, and has been patented by Mr. George Rosenberg, of Muskegon, Mich. The carriage is supported upon axles journaled in hangers, and upon the axles are keyed collars, each pair of axles being connected by a cross bar, the ends of the bars encircling the axles between the collars. Upon the side of the longitudinal beam of the carriage farthest from the saw a rock shaft is journaled, an eccentric or short crank being formed on each end of the rock shaft, the eccentric faces being turned down when the carriage is carried back for a cut. The rock shaft is manipulated by a lever secured thereto at or near its center. A short rod is passed centrally through the cross bars, uniting each pair of axles, the rod being provided at each side of the cross bars with a lock nut, and having a slot in the end facing the rock shaft, with which the rod is united by a link pivoted in the slotted end of the rod, the outer end having an integral sleeve in which the eccentric surface of the rock shaft is held to revolve. When the carriage is to be jigged back, the lever manipulating the rock shaft is moved from the saw, causing a tension to be exerted on the cross bar held between the central collars on the axles, so that the frame and its appurtenances are drawn away from the saw, while to throw the log into contact with the saw, the lever on the rock shaft is turned toward the saw, as shown in the illustration. The rock shaft may, if desired, be journaled inside the carriage frame, either above or below the axle.

A Great Steel Plant.

The steel plant of the Phœnix Iron Company, of Philadelphia, which has been in course of erection for the last four months, is now reported as completed. The engines weigh 370,000 pounds, and the roll train weighs 400,000 pounds. This is the largest plant in the country, not excepting that at Pottsville. The engines have a capacity of 2,000 pounds pressure, and the plant is expected to turn out steel suitable for armoring cruisers for the government and for making steel guns of any caliber.

AN IMPROVED STEAM STEERING-GEAR.

The steam steering-gear herewith illustrated, which has been patented by Mr. Frank B. Turner, of Portland, Oregon, consists in a long steam cylinder, with a piston whose rods reach through opposite ends of the cylinder, and are connected with the tiller ropes, Fig. 1 showing a side elevation, Fig. 2 a transverse section of one of the valves, and Fig. 3 a longitudinal section. The pipes entering opposite ends of the cylinder, as shown in Fig. 3, communicate with a central three-way valve, one of whose openings receives the steam supply-pipe. Similar pipes, also entering opposite ends of the cylinder, are likewise connected with a similar three-way valve, which receives the exhaust pipe, T's in the latter pipes communicating with safety valves arranged to resist the highest pressure the cylinder is obliged to bear in the regular working of the apparatus. The arms of the exhaust and live steam valves are connected by a link, so that the two valves will be moved simultaneously, and when steam is admitted into either end of the cylinder by the live steam valve, it is exhausted from the other end. By admitting steam to both ends of the cylinder at the same time, and closing it in, the piston will be held in any desired position along the length of the cylinder, the exhaust closing before the feed-valve, which may be left open just enough to give the required pressure on both ends.

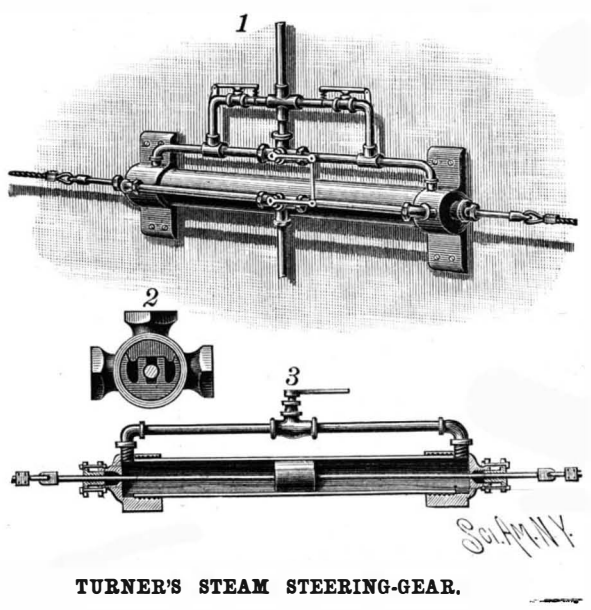

TURNER'S STEAM STEERING-GEAR.

THE GARABIT VIADUCT.

We have already spoken several times of the Garabit viaduct—that colossal work which does so much honor to French engineers—and we have given the dimensions and principal arrangements of it, and have described the placing of a part of the superstructure. We shall now complete what we have already published by a description of the placing in position of the large central arch and the process employed for mounting this huge mass. We shall give a few details in regard to this point, as well as to the tests that have been made this year, and which are borrowed from the interesting book in which the lamented Beyer has given all the calculations relating to the viaduct.

The central arch of the viaduct, constructed by Mr. Eiffel, is, as is well known, of 540 feet span and rests upon two large piers, the metallic part of which is 195 feet in height. The total weight of this arch is 2,608,540 pounds.

The piers were first constructed, and then the two lateral parts of the superstructure were set up upon mounds of earth arranged as platforms. Next, these parts were swung into position on the large piers, and were made to project about 70 feet on the side toward the arch. Each, thus placed, was held very firmly by means of 28 steel wire cables fixed to the rear end and anchored to the abutments of the approaches.

This done, two scaffolds were erected in front of the

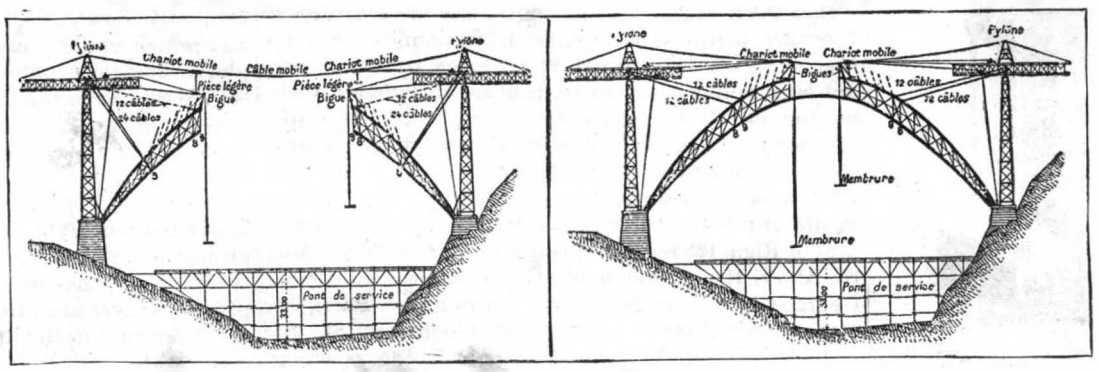

Figs. 1 and 2.—ANCHORAGE OF THE ARCH AND SUPERSTRUCTURE OF THE GARABIT VIADUCT.

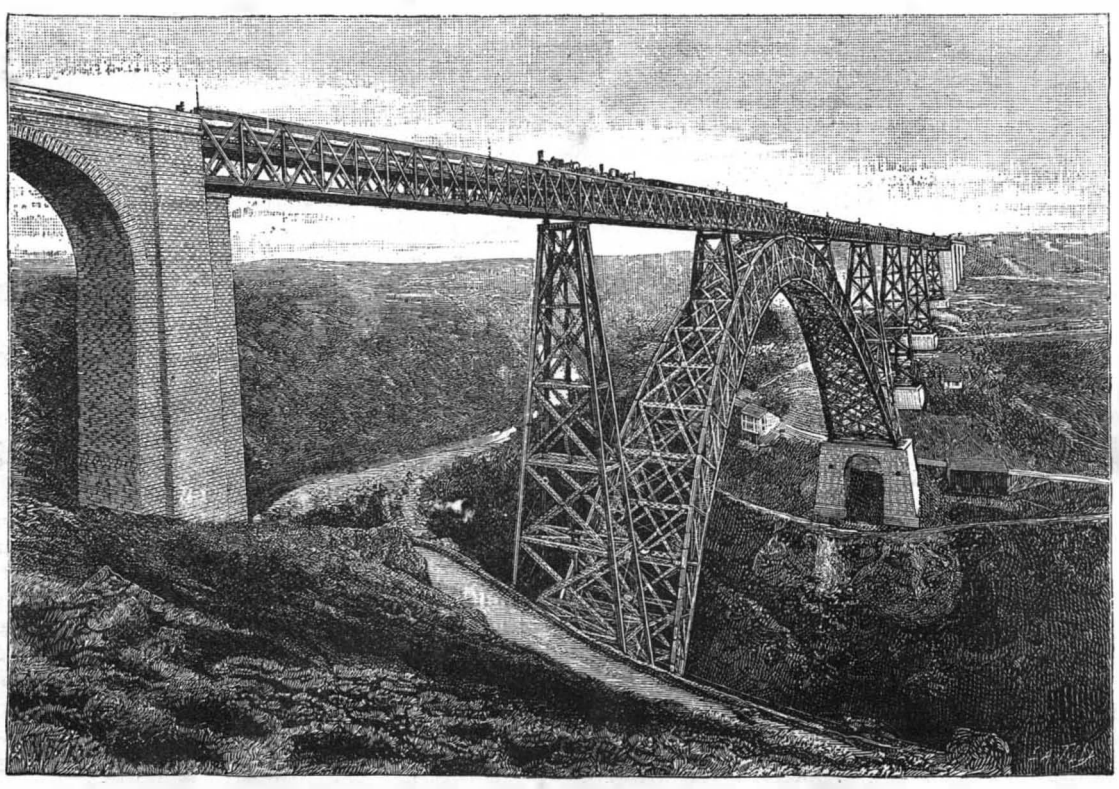

Fig. 3.—TESTING THE VIADUCT UNDER THE WEIGHT OF A 405 TON TRAIN.

Eels that Scale Precipices.

One of the most novel sights in the spring of the year, at the rocks of the Willamette Falls, is the swarms of gyrating eels. They are friskiness itself, and show a low order of intelligence. If you put your hand in the water over the eels, or spit on it, instantly they are gone. But poke a stick down among the snaky things, and they do not notice it. The sense of smell seems to be their main guard against danger. Like salmon, they do their level best to dart up the rocks in order to ascend the river, and with good success. Says a fisherman:

"I have seen as many as a hundred bushels of eels hanging on the rocks at one time by the suckers of the mouth. They would wiggle and flutter their tails, and by the momentum thus obtained, letting go with their suckers, jump up about six inches higher. I caught about forty barrels last season that I salted and sold to the Columbia fishermen for bait. I picked them off the rocks with a fish hook tied to a pole. I started at the bottom row of hanging eels, and would silently pick off barrel after barrel. The upper rows hadn't sense enough to perceive the enemy. I have caught eels in the headwaters of the Santiam, in the Cascade Mountains. Suppose they had swum up from the Willamette."—*Oregon City Courier.*

MANY a man has ruined his eyesight by sitting in the bar room looking for work.

© 1888 SCIENTIFIC AMERICAN, INC.

large piers, and the upper part of these, in the form of an arch, was so arranged as to follow accurately the curve of the inner surface of the proposed arch (that is to say, the intrados) at its springing. Upon these centers were placed the corresponding metallic pieces, and, after this part of the arch had been constructed, it was connected by means of twenty steel cables with the straight superstructure to the right. From this moment, it was possible to begin the mounting of the projecting arch according to the method previously applied by Mr. Eiffel to the Douro bridge. The operation of joining the pieces proceeded by degrees, care being taken, when the weight of the overhanging part became too great, to put a new series of anchoring cables in position, connecting the pier extremity with the upper superstructure. Figs. 1 and 2 well show in what the process consists. The placing of these cables permitted of raising or lowering the parts of the arch in process of being mounted, in every stage of advancement. The special arrangements made to this effect were as follows: The ends of the cables rested upon iron girders through the intermedium of wedges that could be disengaged by means of hydraulic presses. It was then easy to give each cable the desired tension and length. The cables, as a whole, really constituted a totalizing apparatus that permitted of moving million-pound masses by means of a series of successive stresses never exceeding 15 tons.

In fact, Mr. Eiffel had found by preliminary experiment that an increase of half an inch in the length of a cable corresponds to an increase of 2,200 pounds in its tension. By introducing a half-inch wedge under the end of one of the cables, the neighboring cables were decreased in tension 2,200 pounds, distributed over the other cables as a whole. These latter, therefore, were contracted to an extent corresponding to such diminution of tension, and they consequently raised the arch. The totalization of the slight liftings due to the repetition of this maneuver on each of the cables finally effected a general lifting of four inches. When it was desired to lower the arch, the operation was just the contrary, that is to say, the wedges were removed in succession. A mastery over the position of the projecting parts was had at every instant.

After the two halves of the arch had been brought so close together that there was room only for the insertion of the center piece, the process of keying was begun. As the two halves had, during the mounting, been held a little above their final position, there was a few inches more space between them than was necessary for the insertion of the key, and it was only necessary to remove progressively a few wedges to bring the pieces gradually into complete contact.

The closing of the intrados was effected on the 20th of April, 1884, and haste was at once made to ease all the cables in order to prevent a fall in the temperature from producing an increase of abnormal stresses, either upon the cables or the arch itself. This quick easement was effected by means of sand boxes that care had been taken to interpose between the superstructures and the large piers.

On the 25th of April, the few stanchions and uprights that remained to be put in place at the top of the arch were inserted, and on the 26th all was ready for mounting the key of the extrados. This was hoisted at 3 o'clock, and at 7 o'clock in the evening it was definitively placed. It was only necessary to use hammers to cause it to gradually enter the space that it was to fill.

The operation succeeded with a precision that may be qualified as mathematical, seeing the large dimensions of the work and the circumstances under which so delicate a mounting was effected.

It only remains to say a word regarding the tests that were made last April, before the viaduct was opened for travel. These tests were of two kinds. In one the loads remained stationary, in the other they were rolling. The test loads consisted of a 75 ton locomotive hauling 15 ton cars, and the results obtained are worthy of being cited, as they demonstrate the surprising fixedness of the structure.

The arch, loaded for its entire length by a train of 22 cars (Fig. 3), exhibited under this enormous weight of 405 tons a deflection of 0·27 inch. The same train, placed upon one of the halves of the arch, produced a deflection at the key of but 0·15 inch. Finally, under the action of the rolling weight, the deflection was but 0·46 inch.

These figures are significant. They constitute, perhaps, for people who are informed, the finest eulogy that can be addressed to the eminent constructor, Mr. Eiffel, who, after the Garabit viaduct, will astonish the world with his 984 foot tower.—*La Nature.*

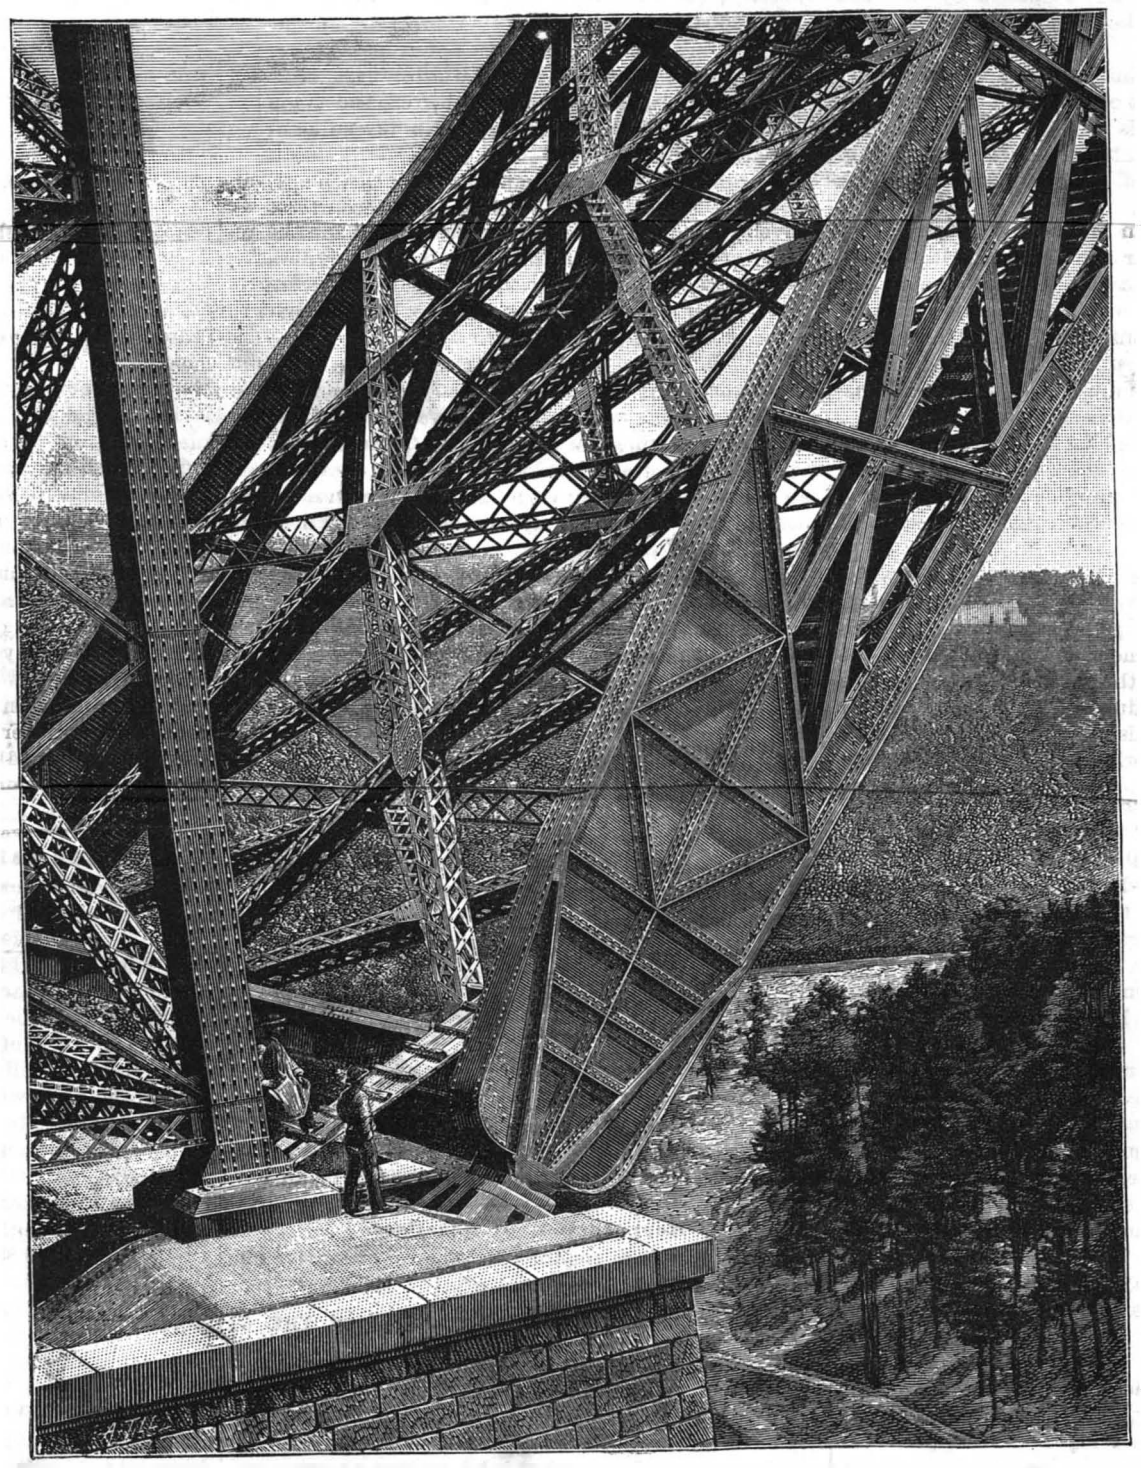

Fig. 4.—SPRINGING OF THE ARCH OF THE GARABIT VIADUCT.

Printing of Photographs in Colors.

Mr. Fred. E. Ives lately read before the Franklin Institute a paper on heliochromy, which was an addition to a communication made to the Institute last February, and in which he explained his method of producing photographs in natural colors.

According to the *Ledger* report, Mr. Ives said: "I assumed that we might counterfeit all the colors of nature in a photographic picture by making each ray of simple color select automatically, in the operation of the picture-making process, such a type color or mixture of type colors as will counterfeit it to the eye, and showed how this can be accomplished by means of photographic plates made sensitive to all colors, and exposed through compound light filters, which are suitably adjusted by experiment upon the spectrum itself."

He quoted from a recently published work on color to show that his plan of operation was in accordance with what is now recognized as the true theory of the nature of light and color sensation. Continuing, he said: "Although I originally worked out my process on the simple plan of making each primary ray of spectrum color select from and combine three pigment colors to counterfeit it, it becomes evident that in accomplishing this I might have produced one negative by the action of solar rays nearly in proportion as they excite the 'red nerve fibrils' of the eye, another in proportion as they excite the 'green fibrils,' and another in proportion as they excite the 'blue fibrils.' I did not do this at once, but after experimenting with several sets of reproduction pigments, adjusting color screens so that I could make the process counterfeit the spectrum with either set of pigments. I finally adopted reproduction colors which call for negatives of the spectrum showing curves of intensity approximating to the curves in Maxwell's diagram, illustrating the action of the spectrum upon the different sets of nerve fibrils. These colors are certain shades of red, green, and blue light, or their complementary colors in pigments, which approximate to Prussian blue, magenta red and aniline yellow, the first two of so light a shade that it is necessary to superimpose one upon the other to obtain a full violet blue, the blue upon the yellow to obtain green, and the magenta upon yellow to obtain red.

Concluding, he said: "Admitting the theoretical soundness of my mode of procedure, which I believe I have fairly demonstrated, there remains only the question of practicability and commercial value to be considered. The process is practicable if the same operations repeated in the same manner can be relied upon to produce pictures which counterfeit the light and shade and color of all objects. Three subjects which I shall show to-night, a delicate oil painting, a brilliant Prang chromo, and a beautiful sea shell, were made with the same light, same camera, same preparation of sensitive plates, same set of color screens, same relative exposures, and same development. They show a very great variety of colors, mostly compound in the painting and chromo, but pure spectrum colors in the sea shell, yet the colors of all are alike faithfully counterfeited to the eye."

The pictures thrown upon the screen by Mr. Ives seemed to fully confirm his claims as to the efficiency of his mode of reproducing the colors in a picture or in nature.

Mr. Ives also exhibited a camera contrived by himself, in which the lenses and color screens are adjusted so as to produce simultaneously the three negatives required by the above mentioned heliochromic process.

The New Railway Bridge at New London, Conn.

A large swing bridge, with two spans of 250 ft. each, is to be erected over the Thames river at Winthrops Point, near New London, to carry the lines of the New York, Providence, and Boston Railroad. The principal peculiarity about the work is the method by which the three deep foundations are to be sunk, the total depth of mud and water to be passed through being 130 ft., 128 ft., and 103 ft. in the different cases. To avoid the expense of the pneumatic system the following plan has been adopted: An immense timber crib in one case, 71 ft. square, is to be sunk to the bottom of the river, and the mud dredged out inside it to the depth of 20 ft. In the space thus prepared piles will be driven. The spaces round the heads of the piles will be filled with concrete, and the masonry of the piers will be built on this.

Christmas Trees.

New York buys thousands of Christmas trees in Maine during the first half of December, and large crews of men are employed in various parts of the State cutting the big town's supply. A Christmas tree is valued first according to its symmetry, second as to its size. The ideal tree is anywhere from ten to fifteen feet in height, with stout branches at regular intervals. Some trees have too few branches, while others have so many as to hide the articles hung upon them. Whole steamer loads of Christmas trees, cut in the western part of the State, are shipped from Portland to New York, and one man in Camden, on Penobscot Bay, is getting out 30,000 trees for the metropolitan market.

© 1888 SCIENTIFIC AMERICAN, INC.

The Working Steam Engineer.

While it is true that in every line of manual labor, whether skilled or unskilled, genius and thought are recognizable, and the service of one man is enhanced beyond that of another, still the divergence from the plane of a general average, in most trades, is so slight as to make a standard of wages possible. The working steam engineer is an exception to this condition.

The street laborer may, by care and thoughtfulness, make himself of more intrinsic value to his employer, yet in a general sense his superiority is not materially felt, and a standard of wages for him is possible. Thus, also, in those branches of skilled employment where the labor becomes of a routine character, and where slight variation of subject is necessary, the same conditions exist.

This being the case, it is easy for combinations of tradesmen or labor to establish, by general consent, a code of wages for the guidance of its members. The further removed from that class of labor where bone and muscle are the only elements necessary for success, the more difficult it is to set any standard by which to estimate excellence or make an equalization of payment.

The medical profession may set a standard of payment, the mere physical act of making a visit being the basis from which payment is estimated; but if the absolute service rendered a patient were to enter into a discussion, the question of remuneration would be somewhat difficult to settle.

The mere fact that a man enters a shop and there toils for the allotted number of hours makes it possible to settle his wages by the standard of another man performing a like service; but when the service rendered is the product of thought and study, when the results of mental activity are thrown into the balance against muscular exertion, then the reward can only be measured by the profit given to the employer.

The greater and more varied the knowledge necessary to perform a certain line of duty, the greater the extreme from the inferior to superior talents; hence in proportion is the service rendered increased or decreased in value.

One of the leading English steamship lines, while having one established code of payment for its chief engineers, has a bonus fund, payable monthly to each chief engineer, which payment is determined by the success of the engineer and the absence of neglect on his part in the fulfilling of his duties. Thus each engineer becomes a competitor for this extra emolument. As the business of steam engineering takes to itself certain qualities of the professions, it becomes necessary to gauge the [illegible] by the same standard—that of especial fitness. To set a standard by which all attorneys were to be paid would at once close the doors to the chamber eminence, and no member of the legal profession would consider the incentive sufficient to warrant him in putting forth the energy necessary to advance beyond mediocrity.

In the employment of men, that class of labor that is purely mental commands higher price than does that class where only physical strength is wanted. One brain may design a steam engine, but more than one is necessary to build it. Hence, then, among brain workers, experience and originality are factors of success. Neither can we gauge a man's worth—commercially speaking—by lapse of time, for one man with frosty locks may have traveled a shorter distance along the highway of observation than his neighbor with half his years.

Certain qualities are always necessary to enable any man to succeed in his vocation, and a man's advancement above his competitor depends upon the magnitude of these qualities.

The working steam engineer is a man in whom must be found executive ability, and in proportion to his ability to execute is his service as an engineer enhanced.

Twin sister to executive ability is self-reliance. The working steam engineer must be endowed with keen perspicuity, so that he may be able to absorb generalities at a glance, and sufficient executive powers to carry out details with correctness and precision. One of the best and most reliable second engineers that we ever met—in marine service—was one of the most inglorious failures as a chief. He lacked completely the attribute necessary to execute. He was so devoid of self-reliance as to hesitate to back out into the stream at the beginning of a new trip any steamer upon which he was chief engineer. A thorough mechanic, and of more than ordinary education, he was in every way a first class man to carry out the details under the general planning of another.

Originality is the cradle in which eminence is nursed, for originality lifts men from the beaten track of the past into unexplored fields, giving the world new productions in science, literature, and art. To succeed, the engineer must be original, and his performing a certain act must not be because some one else did it, but because from his own observation he knows it to be proper and correct.

Not only must the engineer be able to do for himself, but he must plan for others to do; he must be able to direct generalities and execute details; in fact, he must combine the practical and scientific to such an extent as to make it difficult to establish a general standard of payment for his services.—*American Engineer.*

How to Invest Wisely.

The remittance of $3 for one year's subscription to the SCIENTIFIC AMERICAN for the coming year will be a good investment; but there is one that will pay better, and that is to send $7 and receive both the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT during 1889; and yet another that will pay still better, and that is to remit $9 and have the ARCHITECT AND BUILDERS EDITION of the SCIENTIFIC AMERICAN included with the above. With the weekly receipt of the two weekly papers, and the monthly ARCHITECT AND BUILDER, the subscriber will have placed before him all the scientific, engineering, and mechanical news of the day, and enough architectural designs and building news to meet the ordinary wants of a person contemplating building for himself, or a contractor who makes estimates of the cost of construction for others.

Energy and Vision.

In a paper on this subject read before the National Academy of Sciences, Prof. S. P. Langley summarizes the paper as follows:

The time required for the distinct perception of an excessively faint light is about one-half second. A relatively very long time is, however, needed for the recovery of sensitiveness after exposure to a bright light, and the time demanded for this restoration of complete visual power appears to be greatest when the light to be perceived is of a violet color.

The visual effect produced by any given, constant amount of energy varies enormously, according to the color of the light in question. It varies considerably between eyes which may ordinarily be called normal ones, but an average gives the following proportionate result for seven points in the normal spectrum, whose wave lengths correspond approximately with those of the ordinary color divisions, where unity is the amount of energy (about $\frac{1}{1000}$ erg) required to make us see light in the crimson of the spectrum near A, and where the six preceding wave lengths given correspond approximately to the six colors—violet, blue, green, yellow, orange, red.

Color.	Violet.	Blue.	Green.
Wave length,	μ·40	μ·47	μ·53
Luminosity, (Visual effect.)	1,600	62,000	100,000

Color.	Yellow.	Orange.	Red.	Crimson.
Wave length,	μ·58	μ·60	μ·65	μ·75
Luminosity, (Visual effect.)	28,000	14,000	1,200	1

Since we can recognize color still deeper than this crimson, it appears that the same amount of energy may produce *at least* 100,000 times the visual effect in one color of the spectrum that it does in another, and that the *vis viva* of the waves whose length is $0^{\mu}\cdot75$, arrested by the ordinary retina, represents work done in giving rise to the sensation of crimson light of 0·0000000000003 horse power, or about 0·001 of an erg, while the sensation of green can be produced by 0·000000,01 of an erg.

Reproduction of Negatives.

It very often happens that just the very negative one wants for a special occasion or print is either broken or mislaid, much to the annoyance of the serenely unruffled temper of the possessor, more especially if it happens to be a favorite one or if a copy is wanted as a great favor. It is not always convenient to copy a print, supposing you have one from a broken or cracked negative, and every one is the possessor of a copying camera, even of the simplest kind, so that an easy way, if it be an old or an odd one, of reproducing a negative from a print without a camera may prove useful to many who have not all the appliances at hand to do this in the orthodox improved manner.

The print must be an unmounted one, or be dismounted, after which it must be passed through a rolling press on a steel plate, taking great care that it does not cockle, wrinkle, or crease in the process. It may then be gone over and touched up and made as perfect as possible. For the negative get a piece, if possible, of the thin albumenized paper, called long ago negative paper, but if that cannot be got easily, use the ordinary Saxe or Rives paper, the latter by preference. Prepare it by silvering on a strong bath, say of, at least, sixty grains nitrate of silver to one ounce of distilled water, the usual printing bath, in fact. When dry pass it through the rolling press in a similar way to the print, and give it as much pressure as can be given, and be especially careful that no flaw appears on the surface of the paper after it has been pressed, which latter operation, it need hardly be said, must be done in the shade or under yellow light.

The printing frame must have a plate glass, and of a size larger than the size of the print operated upon. Then place the print with the paper side to the glass, the printed side toward the operator; then place the newly prepared paper, which must of course be dry, on the face of the print, close the frame, and see that the contact between the two paper surfaces is perfect, and put as much pressure on as the frame will admit of. Print in the usual manner *through* the back of the print. The time will necessarily be longer than with a negative, or rather with most negatives. Get a good, rich, deep print, which will be negative from the positive print, and if the instructions are attended to, the negative will be as sharp as a film or glass negative, the two smooth glazed surfaces being in intimate—I had almost said optical—contact.

To finish and complete the operation, wash in a flat tray, as if a print in three or four changes of water, and do not tone the negative. The rich brown color of the silver is not only quite sufficient, but far better for printing from than if it be toned. Fix in a strong new bath of hyposulphite of soda, and when thoroughly fixed wash in the usual way, and dry between sheets of blotting paper kept flat. In all the operations be very careful to allow no fold, crack, or imperfection to appear on the resulting negative, as they show in every print taken from it afterward. If the negative is not quite satisfactory, it can now be touched up, worked upon, or improved to any extent. After being quite finished, it is well to pass it again through the press, with the same precautions as before, and then proceed to render it more transparent, durable, and useful, by varnishing. To do this properly it will be necessary to prepare the varnish some hours before it is wanted. Take any clear, transparent, negative spirit varnish—the less color it has the better; see that it is not too thick, and add in the proportion of three drops of castor oil to the ounce of varnish; give it a thorough good shake to mix the oil and varnish together—this confers toughness and elasticity to the varnish, which is invaluable for paper. To varnish the negative, place the albumen side down on a glass, and either with a flat camel hair brush, or by pouring over it, saturate the paper side of the negative first; rapidly dry without cockling, and coat the albumenized side, which takes less care, being more resistant to the penetrating action of the varnish. When *about* dry, place it in a book of clean glazed or writing paper (not printed or printing) with a weight upon it to keep it perfectly flat, and allow it to dry thoroughly, when it will be ready for use.

If the thin negative paper has been taken, it may be printed from either side with indifference, the grain of the paper being hardly distinguishable, and for single transfer carbon work does almost, if not quite, as well as a transferred negative with all its attendant risks not only of removal but in handling, the thin paper being much easier manipulated.—*Br. Jour. of Photo.*

A New Floating Exposition.

The Export Society of Germany has decided to build the "Floating Exhibition Palace of Germany," having raised 5,000,000 marks for the purpose. It proposes to build a ship to be called the Kaiser Wilhelm, which will be the work of German shipyards. According to plans, the ship will be 564 feet long, 65½ feet wide, and 46 feet deep. It will have four engines propelling as many screws. The material will be principally German steel. The cost of a two years' tour is estimated at 3,150,000 marks. The income from the rented space —1,000 to 1,200 marks for each booth—and from sales will be, it is thought, at least 7,260,800 marks, leaving a balance of 4,110,800, or over 2,000,000 marks annually —a pretty sum on the pages of the ledger. Emperor William it is said has promised his aid to the enterprise, and it is hoped that the vessel will sail from Hamburg on her first voyage in the spring of 1890.

A SIMPLE DEVICE FOR THREADING NEEDLES.

The accompanying illustration represents a device designed to facilitate the threading of a needle, which has been patented by Mr. August Scherkenbach, of Shakopee, Minn. The device consists of a spoon-shaped plate provided in its bowl end with a central aperture, flanked at the bottom by two projections fitting into the eye of the needle, and having at its other end a notch forming a resting place for the shank of the needle. The operator, in threading a

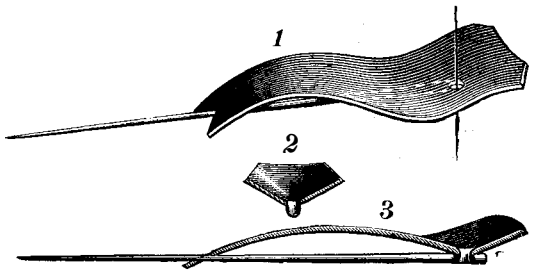

SCHERKENBACH'S NEEDLE-THREADER.

needle, places it on the under side of the plate, so that the projections, as shown in Figs. 2 and 3, fit into the eye of the needle, when the end of the thread, being passed into the bowl, finds its way readily through the central aperture and through the eye of the needle.

© 1888 SCIENTIFIC AMERICAN, INC.

TEST OF THE CAST STEEL BREECH LOADING RIFLE.

As the interest of American steel manufacturers, as well as that of the public generally, has been excited by the recent test of the first Bessemer cast steel rifle cannon at Annapolis, a detailed description of the gun and its trial may be of value to our readers.

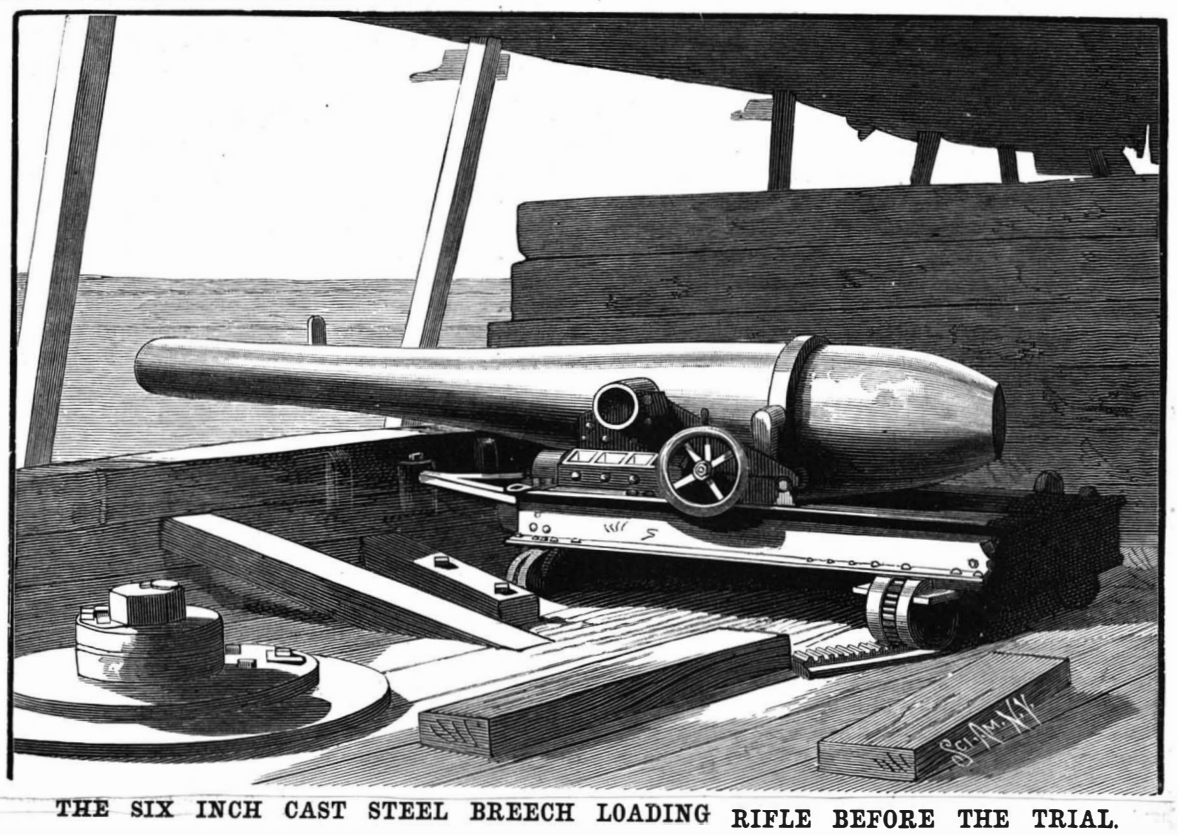

THE SIX INCH CAST STEEL BREECH LOADING RIFLE BEFORE THE TRIAL.

The gun was of Bessemer steel, cast solid in one piece by the Steel Casting Company, of Pittsburg. The casting took place January 11, 1888, and after the outside had been turned down and the bore rough finished by this firm, the gun was finally chambered, fine bored, and rifled at the Washington Navy Yard, where the breech block and elevating band were also fitted. The rifling and chamber reaming were beautifully done, and reflect credit on the government workmen at the Washington yard. According to ordnance nomenclature, the piece is known as a 6 inch breech loading rifle, with breech closure on the slotted screw system and obturation (gas checking) modified from the De Bange system. In this, the leak of gas through the junction of the screw breech plug and the bore of the gun is prevented by a plastic packing ring of asbestos and tallow held in an annular case of canvas. The pressure of gas in the gun on firing expands the ring and makes a tight joint. The interior profile of the bore and chamber was made to assimilate as nearly as possible to the standard built up naval gun of Bureau of Ordnance design. Its principal dimensions were:

Weight, 10,510 pounds; length, 193·5 inches; diameter across breech, 21·78 inches; diameter of bore (across lands), 6 inches; diameter of chamber, 7·50 inches; capacity, 1,400 cubic inches; twist of rifling, from 1 turn in 180 to 1 turn in 30 calibers; weight of projectile, 100 pounds; weight of powder charge (full), 48¼ pounds.

The projectile was the common cast iron shell, 21 inches long, 6 inches in diameter, with ogival head and rotation band of copper. This band has a slightly greater diameter than the bore of the gun, so that the gas pressure, when the gun is fired, forces the soft metal into the grooves of the rifling, and thus gives rotation to the projectile.

The powder used was manufactured by Messrs. Du Pont, and is known as brown prismatic or cocoa powder from its color. Every grain has the form of a right prism with a hexagonal base and a quarter inch hole in the axis, the object of the hole being to allow ignition in the center and thus cause the grain to burn with an increasing surface for combustion. The height of a grain is one inch, and there are about ten grains to the pound. It is the same kind of powder that is used in the regular service guns, and the charge was the same as is fired in the built-up 6 inch guns of the navy. From previous records of firings with this powder, this charge of 48¼ pounds could be depended on to give a muzzle velocity to the projectile of 2,000 feet per second, with a pressure on the walls of the gun of about 15 tons to the square inch.

Preparatory to the test, the gun was mounted on a carriage in which the energy of recoil was absorbed by the resistance offered by water in being driven through a small orifice, while after recoil the gun was run out quickly to battery automatically by compressed air in two small reservoirs in rear. The carriage worked admirably during the trial.

To prevent accident to spectators and guns lying near by on the battery platform, a house of heavy timbers, 12 inches square, in two layers, was built over and on both sides of the gun where it lay mounted in the gun shed; besides which, bomb-proofs were provided near by on the grounds to the rear, from which the action of gun and carriage could be seen reflected in mirrors.

The firing trial took place on December 5, and was under the direction of Lieutenant A. M. Knight, Inspector of Ordnance in charge of the proving ground, assisted by Lieutenants Wilner and Gleaves and Ensign Dashiell. The owners of the gun were present, as well as many naval officers and representatives of the press. It was intended to fire ten rounds as rapidly as possible with full charges—the regular naval gun test—but, at the request of President Hainesworth, of the Steel Casting Co., a reduced charge of 36 pounds of powder was decided on for the first round. The gun was pointed at a thick hill of earth thrown up for such purposes. The shell was entered and run home; then came the charge in a tight fitting serge bag, and the breech was closed and primer put in. Every one took shelter in the bomb-proofs, and the 60-foot lanyard was pulled. A tremendous crash, with a shower of mud from the earth butt, followed. The gun recoiled 21¾ inches, and everything worked perfectly. This charge gave a velocity of 1,700 feet per second and a pressure of about eleven tons.

WRECK OF SHED AFTER THE EXPLOSION.

The rapid firing test of ten rounds, with full charge, was next prepared for. A shell was run in, the full charge of 48¼ pounds entered, and the breech closed. When all had taken shelter, the lock string was pulled. A terrific explosion followed. The air was filled with flying timbers and pieces of steel and a dense cloud of dust. The roof of the gun shed was wrecked, the logs were blown in every direction, and many of them were split and crushed to splinters. Pieces of the gun lay around on all sides. The wreck of building, carriage, and gun was complete. The breech was blown 130 feet to the rear, with the plug in it and the pressure gauges uninjured. The chase and muzzle were projected forward 10 feet, while the shell probably struck the butt from 15 to 20 feet from the point aimed at. When the wreck could be cleared away, it was found that the breech of the gun, from the trunnions to the rear face, had been ruptured and broken into twelve large pieces and several smaller ones. The annexed sketch will give an idea of the lines of fracture.

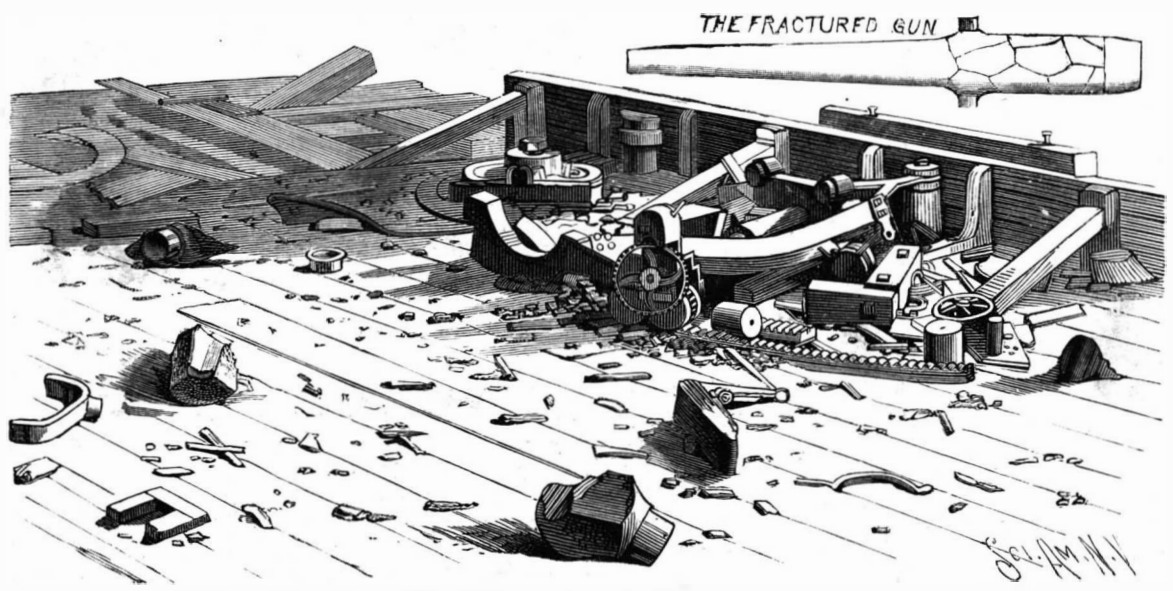

REMAINS OF GUN AFTER CLEARING AWAY THE WRECK.

The carriage was completely demolished.

On examination of the gauges which were in the breech block, a pressure of 14·1 tons to the square inch was recorded—less than the expected mean pressure of

© 1888 SCIENTIFIC AMERICAN, INC.

15 tons. This is the first cast steel gun that has been tested at the proving ground. Another, of open hearth steel, by the Standard Steel Casting Co., awaits a trial, which will probably take place during the coming month.



ACTUAL SIZE ONE GRAIN POWDER.

The Brooks Underground System in Brooklyn.

The Brooks system of underground telephone conductors now being laid in Brooklyn by the New York and New Jersey Telephone Company consists in saturating the textile covering of the cables with a mixture of resin and resin oil and drawing the cables into the wrought iron pipes. The pipe is first prepared by scouring the inside sufficiently to remove the sharp edges or protuberances, and reaming the sharp ends in order that the covering of the cable will not be abraded when pulled into the pipes. Instead of using the ordinary socket or coupling, a T-coupling is used. For a pipe 2½ inches in diameter the T is provided with a 1 inch plug, and when the lengths are screwed together the plug of the T points upward. For every 500 or 1,000 feet length, or such length as may be most convenient, there is a splice box, and for the length to be pulled in there is another splice box, over which there is placed a winch. When the lengths of pipe are screwed together, the length is beaded over a wire, which is drawn from a reel as each successive length of pipe is added.

When a sufficient pulling length is formed, a few lumps of caustic lime fresh from the kilns are placed in the splice boxes, the object of which is to dry the air contained in the pipe. Every screw thread before screwing up is well covered with a mixture of white lead and linseed oil, such as is used to make an ordinary screw joint moisture-proof. The pipe is the common lap-welded wrought iron; the wire left in the pipe is for the purpose of drawing in the rope which is used for pulling in the cable.

Common resin of the heaviest quality is broken up and thrown into the caldron, and for a barrel of resin there is added a barrel of resin oil. The oil is known in the trade as "London oil" or "kidney oil." The cost of the resin is about $1.50 per barrel; the oil costs about 11 cents per gallon.

When sufficient of this mixture is placed in the caldron to cover the cable, the fire is kindled underneath, and the contents of the caldron heated to about 360° Fahrenheit.

When the mixture is heated to above the boiling point of water, 212° Fah., yellow or red bubbles begin to rise and float over the surface until the moisture is all evaporated. The heat is carried to about 360° Fah., and remains at that point until all floating bubbles cease. It takes two hours or more after the heat has reached 360° Fah. in the liquid for it to penetrate the coil of cable sufficient to drive out all moisture. When the floating bubbles cease to show themselves, the cable is ready for pulling into the pipes. In some cases fresh lime is pulverized in a mortar and introduced into each T-joint, which prevents the cable from adhering or sticking to the pipe when pulled in, and if that is not done, about a gallon of common illuminating oil, such as coal or kerosene, is put into the highest points of the pipe, and this keeps the cable from adhering to the pipe, as the resin and resin oil mixture is an exceedingly sticky substance. Two men with a winch can pull in 500 feet in 20 minutes; but with horses and without the aid of a winch, 520 feet was pulled in in Brooklyn in five minutes.

After the cable is introduced, and after the splices are made in the splice boxes, the mixture is drawn from a spigot in the caldron heated at a temperature of 400° Fah., and turned on to the splices until no more of the mixture can be introduced at that point. The splices are wrapped on the outside with a piece of canvas or coarse cloth, so that none of the splices will touch the iron of the boxes, otherwise the hot mixture will not drive away the moisture left on the splices from the hands of the splicer.

When the splices for a length of cable are made, the T-joints are unplugged, and the pipe filled with the mixture at a temperature of 360° Fah.—*Electrical World.*

GIGANTIC FOSSIL MAMMALS.

Mr. Strauch, the learned director of the museum of the St. Petersburg Academy of Sciences, has recently sent us a photograph of the celebrated mammoth which exists in the collection of that establishment. We reproduce it herewith.

The mammoth (*Elephas primigenius*) of this museum is the one whose entire carcass was found in 1799 on the

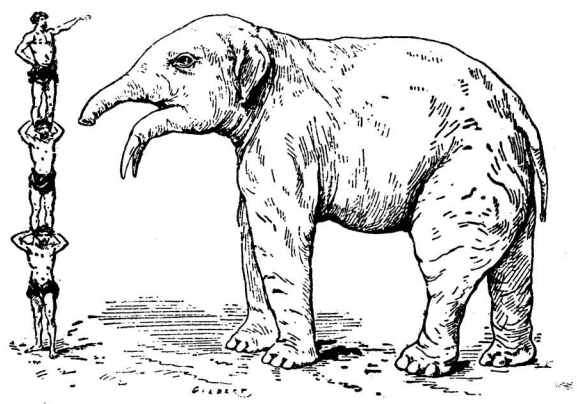

Fig. 2.

shores of the Arctic ocean near the mouth of the Lena. As seven years elapsed between its discovery and its shipment to St. Petersburg, a portion of its flesh was devoured by dogs and wild beasts. The greater portion of what remained was removed from the bones by Adams because it rendered carriage too difficult. The photograph shows that the skin and flesh have been preserved only upon the head and around the feet.

According to Tilesius, the skeleton is 11¼ ft. in height from the top of the head to the bottom of the feet. It is smaller than the skeleton of the *Elephas meridionalis* of the pliocone of Durfort, which is in the new gallery of the Paris museum. The Durfort skeleton is 12¼ ft. in height at the shoulder bones, and 13¾ from the top of the head. It is 21½ ft. long from the end of the tusks to the posterior edge of the pelvis, and 17½ ft. from the front of the head to the back of the pelvis. These dimensions much exceed those of the skeleton of the Sansan mastodon, and even surpass those of the gigantic American mastodons. The Durfort skeleton is the largest entire skeleton of a fossil mammal thus far known.

We have isolated bones that announce still more powerful animals. Thus, Mr. Haussmann, while prefect of the Seine, gave the museum a humerus of the *Elephas antiquus* found very near Paris in the quaternary of Montreuil-sous-Bois. This bone measures 4¼ feet, while that of the Durfort skeleton measures but 4 feet. We have brought from Pikermi the tibia of a dinotherium which measures 3 feet, while that of the Durfort elephant is but 2·6, and also some metacarpals that present just as great a difference.

If the proportions of the tibias, humeri, and metacarpals and total height of the skeletons were the same in the *Elephas antiquus* and the *Dinotherium giganteum* as in the Durfort *Elephas meridionalis*, it would be necessary to suppose that the *E. antiquus* attained a height of 13 feet at the shoulders and 14½ at the top of the head, and that the dinotherium reached 13 feet at the shoulders and 16 at the top of the head.

So, two human giants, one standing upon the other, would not reach the top of the head of the Durfort elephant; and three six-foot men, standing one on the shoulders of the other, would scarcely reach the top of the head of the Pikermi dinotherium.

It is natural to find the maximum of size in the Pikermi dinotherium, for this majestic creature lived, along with two species of mastodon and anchylotherium, and a giraffe and a helladotherium, at the epoch of the upper miocene; that is to say, at the moment when the animal had its apogee.

The *Elephas meridionalis* and the *E. antiquus* lived in company with hippopotami in the warm phases of the pliocene and quaternary, in which there must have existed a rich vegetation. If there is anything astonishing, it is that the mammoth of the glacial regions of Siberia, doubtless living in districts too cold for the development of an arboreal vegetation, reached the large stature exhibited by the skeleton in the St. Petersburg museum.

It will be seen from what has just been said that if we wished to classify some of the largest mammals by order of size, it would be necessary to establish the following ranks:

1. *Dinotherium giganteum* of the upper miocene of Attica.
2. *Elephas antiquus* of the quaternary of the environs of Paris.
3. *Elephas meridionalis* of the upper pliocene of Durfort.
4. *Mastodon Americanus* of the quaternary of the United States.
5. *Elephas primigenius* of the quaternary of Siberia, and the present elephants.

It is not likely that man has seen the dinotherium, but it is certain that he has come face to face with the *Elephas antiquus* and the mammoth. In order to fight them, he had but stone axes, and yet he conquered them. This allows us to believe that our ancestors of quaternary times had spirit and courage.—*La Nature.*

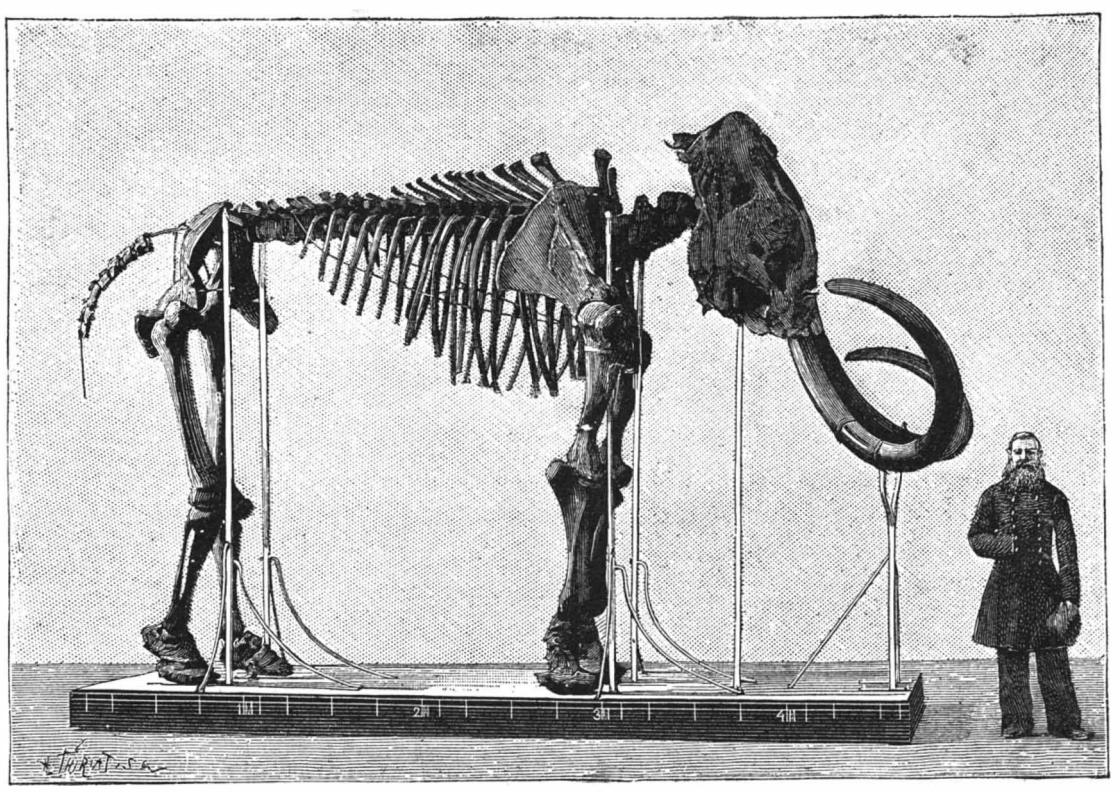

Fig. 1.—SKELETON OF THE SIBERIAN MAMMOTH.

Coal Oil and Natural Gas.

People often talk of the advantages of natural gas as a fuel without having an adequate idea of its importance. It is to-day the greatest commercial wonder of the age. No one can ponder over the following figures without being deeply impressed: It is only fifteen years ago, says the editor of *Stoves and Hardware*, published at St. Louis, that natural gas was first used as a fuel, yet to-day there is required to pipe it 27,350 miles of mains. In Pittsburg alone 500 miles supply 42,698 private houses, 40 iron mills, 37 glass works, 83 foundries and machine shops, and 422 miscellaneous industrial establishments. An idea of its value as fuel can best be obtained when the value of 7,000,000 tons of coal is estimated, as it is asserted that this amount of coal is annually displaced by natural gas. An idea of the effect a retarded production has in advancing prices can be seen in the shut-down movement in oil production.

This commenced in earnest just about a year ago, and the following is the result: In 1886, when no attempt was made to lessen production, the average run from wells was 70,666 barrels per day. In 1887, when there was less than two months' organized effort in this direction, the average daily run was 63,545 barrels. In ten months of 1887, ending November 1, when the movement was on foot in earnest, it was less than 44,000 barrels per day. The average price of certificates for the first ten months of 1887 was 64¾ cents, for the first ten months of 1888 it was 87 cents, an increase in value of 34½ per cent.

Vacuum Drying.

Mr. Beauder has applied the vacuum principle for the partial drying of fabric. The cloth is passed in full width on a horizontal cylinder, supplied with a slit through its entire length, just on the place where the cloth is allowed to pass. The cylinder is in communication with another tube, by means of which steam is introduced, which, by going out on the other side, creates a kind of vacuum in the cylinder, and by compelling the air to pass through the fabric and through the slit of the cylinder, effects a partial drying. The cloth is allowed to pass over the cylinder slowly only in order that a sufficient amount of moisture may be removed.

© 1888 SCIENTIFIC AMERICAN, INC.

RECENTLY PATENTED INVENTIONS.

Engineering.

CAR UNCOUPLING DEVICE.—William O. Rutledge, Galveston, Texas. This invention covers a novel construction and arrangement of apparatus whereby the uncoupling may be quickly and readily effected from either the side or top of a car or from the locomotive, while the brakes will be automatically applied by the detachment of the brake couplings.

Agricultural.

COTTON PLANTER.—David H. Ellington, Cuthbert, Ga. This is a machine designed to open the furrow, drop the seed, and cover it in one passage over the field, in a manner to economize the seed and prevent uprooting or damage to the plants intended for full growth when the plants are chopped to a stand, while the machine may also be used advantageously for distributing fertilizers.

COTTON PICKER.—James W. Wallis, Birmingham, Ala. This is a machine having pickers for extracting cotton from the bolls, the pickers being alternately thrust into and withdrawn from the cotton plants as the machine travels along, while the machine has devices for transferring the cotton extracted by the pickers back to a suitable receptacle.

Miscellaneous.

FIRE ESCAPE.—Thomas B. Nutting, Morristown, N. J. This device is made with two detachably connected roller cages, each having a lever arm from which the body-supporting slings are suspended, an adjusting lever being also arranged in connection with the roller cages, whereby the frictional grip upon the rope may be varied by the party using the escape to increase or decrease the speed of descent.

SURGICAL KNIFE.—Justus Schmitt, Osnabruck, Germany. The knife handle is made with detachable and interlocking parts in which the blades are pivoted, the parts of the handle being locked together when the blades are closed, but free to be separated when the blades are open, while the knives may be readily taken apart and thoroughly cleaned after use.

PAPER MAKING MACHINE.—Lyman E. Smith, Mittineague, Mass. This invention provides a new and improved stuff regulator for paper machines, for regulating automatically the flow of pulp from the pulp box to the paper machine, the invention covering various novel features of construction and combinations of parts.

CASTER FRAME.—James J. Sullivan, Brooklyn, N. Y. The frame or horn is U-shaped, with apertures or bearings for the wheel axis, while the lower ends of its sides extend in front and rear of the apertures, beyond the periphery of the wheel and below the axis, so that the casters will prevent the chair or other article in which they are used from being easily tipped over.

PACKING AND BARRELING MACHINE.—Daniel F. Shoup, Ludington, Mich. This is a machine designed to pack salt, sugar, cement, and similar materials in barrels, from a pile, its parts being adjustable relatively to each other as may be required within a packing room without any change of the main shaft-supporting frame.

OIL DISTRIBUTER.—Edward Williams, Lynn, Mass. It consists of a double truncated, cone-shaped receptacle, having apertures for the flow of oil in connection with a protective covering, the distributer to be cast overboard and drawn along through the water, or to be hung from a ship's side, to allow of the escape of oil in rough weather to quiet the sea.

FELT HAT.—Frederick W. Cheetham, Hyde, Chester County, England. This invention consists in a felt hat formed of a completely felted body having an exterior or superficial veneer or covering of fine fur or wool, free from proofing or stiffening material.

SAWING ATTACHMENT.—George M. Cobb, Philadelphia, Pa. This is an improved attachment for shapers or like tools, having a reciprocating movement to saw off metallic or other bars, or to form slots, splines, etc., the attachment being also adapted to various other machines having a reciprocating movement.

BALING PRESS.—Anton Freytag, Flatonia, Texas. This is a press which can be conveniently manipulated in either a vertical or horizontal position, and readily transported in a field from stack to stack of hay, while it may be effectively and expeditiously operated by two persons.

SHIRT.—Thomas J. Holmes, Sioux City, Ia. This is an improved garment, wherein the body is made of one material, as of woolen, while the collar band, bosom, and cuffs are of another material, as of linen or cotton, the invention covering novel features of construction and combinations of parts.

LOCK.—George E. Hyatt, New York City. This is an improved combination lock especially adapted for use in connection with a letter box, the invention providing a simple and easily manipulated device whereby the use of a key will be dispensed with.

GOLD LEAF CUTTER.—James F. O'Hara and Robert H. Kaulfuss, Brooklyn, N. Y. It is a kind of knife composed of several strips with interposed blades beveled at their ends, and united by solder, the device being adapted to cut gold and other leaf into several narrow strips at a time, without waste of gold.

SOAP.—Inrank A. Packard and John D. Struble, Salina, Kansas. This is a composition designed for use in connection especially with laundry soap, and by the use of which bleaching liquids or powders and acids may be dispensed with, this soap compound being designed to effectually clean and whiten the most delicate fabric, as silk, satin, laces, etc.

THILL COUPLING.—William H. Pardee, Columbia, Dakota Ter. Two patents have been granted this inventor on this subject, the coupling being provided with a bar having an elongated right-angled end, a mortised and slotted lever being received upon the bar and adapted to bear on the inner end of the thill iron, a threaded stud being inserted in the elongated bar and having a milled nut bearing upon the slotted end of the lever. in connection with a spiral spring, one of the patents also being specifically for a simple and efficient coupling bolt fastener to prevent rattling, and which cannot become accidentally loosened.

SNOW PLOW.—Combined with a frame mounted to travel on a railroad track in front of a locomotive are section plows mounted one above another, the highest one held sightly in advance of the one just below, and designed to remove the top layer of snow, steam being used to heat the plow sections, and thus aid the latter in readily entering hard-packed snow.

FINGER RING.—David Kutner, Brooklyn, N. Y. The ring is formed with a gem box and surrounding flange having screw sockets, in combination with small screw clamps for holding the setting in the gem box in such way that it may be readily removed and another put in its place, the invention being also applicable for brooches, lockets, etc.

Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

Best in market; "New Model Crandall Type Writer," 202 LaSalle Street, Chicago. Send for circular.

Air compressor for sale cheap. Also steel tanks, iron rail, cars, etc. Address The Buffalo Wood Vulcanizing Co., Buffalo, N. Y.

Pratt & Letchworth, Buffalo, N. Y., solicit correspondence relative to manufacturing specialties requiring malleable gray iron, brass, or steel castings.

For the latest improved diamond prospecting drills, address the M. C. Bullock Mfg. Co., Chicago, Ill.

Iron Planer, Lathe, Drill, and other machine tools of modern design. New Haven Mfg. Co., New Haven, Conn.

Link Belting and Wheels. Link Belt M. Co., Chicago.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J

Perforated metals of all kinds for all purposes. The Robert Aitchison Perforated Metal Co., Chicago, Ill.

The Holly Manufacturing Co., of Lockport, N. Y., will send their pamphlet, describing water works machinery, and containing reports of tests, on application.

Pedestal tenoner. All kinds woodworking machinery. C. B. Rogers & Co., Norwich, Conn.

Billings' Drop Forged Lathe Dogs, 12 sizes—⅜ to 4 inches. Billings & Spencer Co., Hartford, Conn.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Hoisting Engines, Friction Clutch Pulleys, Cut-off Couplings. The D. Frisbie Co., 112 Liberty St., N. Y.

Tight and Slack Barrel Machinery a specialty. John Greenwood & Co., Rochester, N.Y. See illus. adv., p. 28.

Automatic taper lathes. Heading and box board machines. Rollstone Machine Co., Fitchburg, Mass.

Duplex Steam Pumps. Volker & Felthousen Co., Buffalo, N. Y.

☞ Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

NEW BOOKS AND PUBLICATIONS.

KRUPP AND DE BANGE. By E. Mouthaye. New York: Thomas Prosser & Son.

ALFRED KRUPP. By K. W. and O. E. Michaelis. New York: Thomas Prosser & Son.

It is perhaps but natural that the New York firm which has for years been the representative in this country of the famous steel works at Essen should feel sufficient admiration for their founders and proprietors to become the publishers of these monograms. The comparison of the Krupp and De Bange systems of heavy guns is made by a captain on the Belgian general staff, and, although it contains much matter of interest, it is evident that such comparisons have yet to be carried much farther than they have yet been to reach judgments that will be entirely conclusive. The sketch of the life and work of Alfred Krupp is translated from the German of Victor Niemeyer.

THE ELECTRIC MOTOR AND ITS APPLICATIONS. By Thomas Commerford Martin and Joseph Wetzler. New York: W. J. Johnston. Quarto. Pp. 282. Price $3.

The design has been in this work to treat the modern motor with the utmost fullness possible, the contents of the book being largely based upon articles that have appeared within the past two or three years in an electrical journal of which the authors are editors. The book is profusely illustrated, and the typography is excellent. Among the systems treated of with most thoroughness may be mentioned the Daft, the Sprague, the Field, and the Van Depoele, for a prolonged examination of which the authors have had special facilities.

The Pope Manufacturing Company, of Boston, has issued the Columbia Bicycle Calendar and Stand, a convenient little memorandum pad suitable to occupy any vacant space on a desk. The pad is well filled with quotations designed to be of especial interest to the bicycler.

Received.

THE CHEMISTS' AND DRUGGISTS' DIARY, 1889. Published by the *Chemist and Druggist*, London, Eng., and presented to every subscriber.

PREPARING FOR INDICATION; or, practical hints resulting from twenty-three years' experience with the steam engine indicator. By Robert Grimshaw. New York: Practical Publishing Company.

STEAM HEATING. By Robert Briggs. New York: D. Van Nostrand.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information, and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all, either by letter or in this department, each must take his turn.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(44) D. J.—Wood is not petrified by any artificial treatment.

(45) J. V. B. writes: A coating varying in color from dark brown to gray forms on the zinc plates of a bichromate of potash battery. Zincs are best quality rolled zinc, well amalgamated and 6×4×¼ inch. Carbons are electric light carbons, with copper removed by nitric acid. How can such accumulation be prevented, as the battery is much weaker after first using? A. A simple bichromate battery is quickly exhausted; the zinc also is attacked by the chromic acid. For constant current you need a porous cup for the carbons, with the bichromate solution contained in it, with dilute sulphuric acid in the large cup. A porous cup combination will overcome your trouble.

(46) C. O. M.—The following is a gear table for 11-thread feed screw. You may interpolate for any required thread by dividing teeth in spindle gear by the number of threads on feed screw and multiply the quotient by number of thread required. The product will be the number of teeth in the screw gear. Use any other gear in the list for transfer, or two gears of the same size to change the motion.

	Screw gear.	Spindle gear.
For 10 threads	40	44
11 "	44	44
12 "	48	44
14 "	56	44
16 "	64	44
18 "	72	44
20 "	80	44
24 "	96	44
30 "	90	33
40 "	80	22
50 "	100	22
60 "	120	22
120 "	240	22

(47) F. R. C. asks: 1. Will a boiler 20 feet long with 2 flues 14 inches in diameter consume more fuel than a tubular boiler of the same capacity per horse power, using coal or wood? A. The economy of a boiler can only be known from observations of the amount of waste heat radiating from the brickwork, the exposed part of the boiler, and, the most important of all, the temperature of the gases going up the chimney. Any form of boiler that is overworked is not economical. Any properly set boiler, well covered in on top, and from which the heat in the flue chamber after it has left the boiler is not over 600°, may be said to be economical, whether it is a flue boiler or a tubular boiler. This heat standard is also modified somewhat by the pressure of steam carried in the boiler. The waste gases with a high pressure (say 100 pounds) are naturally of a higher temperature than from a low pressure (say 50 pounds), when run with the most economy as to fuel and use of steam. A flue boiler that is driven to excessive work may waste more heat than a tubular boiler having the same amount of effective heating surface. The large flues allow the heated air to flow in larger masses and at greater velocities, which is the principal point against flue boilers. 2. I have an engine 9 inches bore and 9 inches stroke, which I am running at 120 revolutions per minute, or the piston travels 180 feet per minute. Do I gain power by running the engine so fast? A. Your engine is running at an economical speed. You gain in power over lesser speeds. The figures you give are not sufficient for definite opinion.

(48) J. A. W.—Mange is a parasitic disease and is cured by insecticidal applications. Many formulæ have been tried. One runs thus:

Sublimed sulphur	16 parts.
Whale oil	16 "
Mercurial ointment	1 "
Oil of tar	1 "

The disease is recognized by loss of hair, local irritation, and desire to scratch. If not perfectly eradicated, it will reappear on cessation of treatment.

(49) E. De F. asks how to make and keep glue liquor always ready for use, that is glue water, so it will not, when cool, thicken. A. To keep glue liquid add a little acetic or nitric acids. For liquid glue the following formula is given:

Glue	8 ounces.
Water	½ pint.
Nitric acid (sp. gr. 1330)	2½ ounces.

We doubt if we can give you a wood filler combining the requirements stated.

(50) R. E. H. asks: 1. How can I keep a fine surface on a canoe in salt water? I have tried spar varnish, and it does not answer. A. We know of nothing better than boiled linseed oil, often rubbing clean with raw linseed oil on a coarse woolen cloth. 2. How can I make glue clear? A. You cannot make common glue clear. Use only white glue or isinglass.

(51) D. R. J.—The specimen sent is pyrites in calcite. It may contain a little copper, but not enough to make it of any value.

Enquiries to be Answered.

The following enquiries have been sent in by some of our subscribers, and doubtless others of our readers will take pleasure in answering them. The *number* of the enquiry should head the reply.

(52) Please give through your paper a process for giving wire a smooth polish, either by pickling or galvanizing, and oblige.—W. D. R.

(53) Kindly furnish me with a good formula for a good brick enamel for various colors, and the *modus operandi* for obtaining a good and lasting enamel upon the bricks.—O. K.

(54) 1. I want to make small springs for my violin holder, about ¼ of an inch wide and 2 in. long. What kind of steel shall I use, and how can I make them? 2. I desire to print my name in gold upon velvet. How can I make it?—R. T. F.

(55) Our city water mains carry a pressure of 60 lb. Suppose we attach a hose to one hydrant with a 1¼ inch nozzle and to another hydrant we attach a hose with a 1 in. nozzle, which of the two will throw the highest stream of water with the same pressure?—W. H. G.

(56) Will you please inform me the number of horse power a pipe five feet in diameter and thirty miles in length would convey of compressed air, the pressure being 100 lb. and 200 lb. per square inch?—J. S.

(57) 1. How many horse power will it require to drive a dynamo large enough to produce electricity enough to heat a round plate of iron 6 in. in diameter and 2 in. thick, to a low red heat, say 1,000° F. in 30 minutes time? How much power will it require to heat said plate to 2,000° F. in same length of time? 2. How much more power will it take per hour to heat a plate 8 in. in diameter by 4 in. thick and hold it at 2,000° for 24 hours, the temperature in room being held at 75°?—G. S.

(58) What is the test for China clay, and how does it sell?—W. H. C.

(59) I am a engineer and am running 35 horse power boiler and engine, but I am only utilizing 15 horse power. Now, for economy, I would like to know how far should the grate bars be from the boiler to give the best results in burning coal. We are going to change our firebox from wood burning to coal burning. Our boiler is a horizontal flue boiler, 12 ft. long 4 ft. diameter. Please state in your next issue, if possible. A constant reader.—F. H. G.

(60) Can you write me how to figure or give the rule how to figure the horse power of engines? Also how to figure out the safety valve of a steam boiler.—H. B.

Replies to Enquiries.

The following replies relate to enquiries published in last week's SCIENTIFIC AMERICAN, and to the numbers therein given:

(15) Speed of Fly.—The house fly gives 330 beats per second when it wings. Its absolute speed I do not know.—T. S.

(15) The flight of a house fly is impulsive and curvilinear. They are seldom seen to move in a straight or nearly straight line. Their momentary speed of flight is estimated at from 10 to 15 feet per second, under the impulse of getting out of harm's way.

(15) How fast can a house fly fly? Prof. C. V. Riley, of the U. S. Department of Agriculture, Division of Entomology, says he is not familiar with any published statement as to the rate of speed of the house fly, and has not made any observations upon the subject. He doubts whether this insect is capable of a long continued flight, and his impression is, from observing its short darts about a room, that it probably does not fly faster than 20 feet per second or thereabout, which would be at the rate of something over 13½ miles an hour. This, however, is a mere guess on his part, and should not be taken as at all authoritative.

(16) Grafting Wax.—(*a*) Take:

Pitch	4 ounces.
Resin	4 "
Lard	2 "
Beeswax	2 "

Melt over a slow fire, or (*b*) melt together equal quantities resin and beeswax and add enough tallow to produce the proper consistency.—A. V.

(16) Grafting Wax.—

Pine resin	50 parts.
Tallow	10 "
Turpentine	5 "
Spirits of wine	5 "

The resin is melted in an iron vessel. The turpentine is added, next the tallow, and finally the spirits of wine. Stir the ingredients thoroughly and cool.

(17) Speed of Birds.—The vulture is credited with a speed of 150 miles per hour; the wild goose and swallow, 90 miles per hour; the crow, 25 miles per hour. Carrier pigeons are credited with 600 miles in 8 hours, and 3 miles in 3 minutes and 24 seconds. Recent trials give about 1,100 yards per minute for carrier pigeons.—V. S.

(17) The vulture is supposed to be the swiftest bird, 150 miles per hour. The wild goose and swallow 90 miles. Carrier pigeon from Pesth, Hungary, to Cologne, Germany, 600 miles in 8 hours—75 miles per hour. Trials in New Jersey average about 60 miles per hour. No record of the hawk. See interesting articles in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 298, 271, 310, flight of birds and migration.

(18) Violin Varnish.—The famous Italian violin makers used, it is said, the following sort of varnish on their instruments: Rectified alcohol, half a gallon; six ounces of gum sandarac, three ounces of gum mastic, and half a pint of turpentine varnish. The above ingredients are put into a tin can by the stove and frequently shaken until the whole is well dissolved. It is finally strained and kept for use. If upon application it is seen to be too thick, thin with an addition of more turpentine varnish. The wood should be stained

© 1888 SCIENTIFIC AMERICAN, INC.

before applying the varnish. For a red stain use camwood, logwood, or aniline. You can find the tone of a piece of wood by comparing its note when it is struck with the notes of any musical instrument tuned to standard pitch.

(18) C. C. M.—Red Varnish for Violins.—Dissolve over a moderate fire—

Sandarac	12 parts.
Shellac	6 "
Mastic	6 "
Elemi	3 "

In 150 parts 95 per cent alcohol which has been colored red with cochineal, or if a darker red is required, add dragon's blood gum. When the above is dissolved add 6 parts Venice turpentine. As this varnish is highly inflammable, use caution as to fire. Find the tone of a piece of wood by direct comparison with similar notes on the piano or any standard instrument. A violin in tone at the proper pitch by a tuning fork is very convenient.

(18) Varnish for Violins—Tone of Wood for Same.—Dissolve by heat 2 ounces amber in oil of turpentine 5 ounces, and drying linseed oil, 5 ounces. Color with dragon's blood or extract alkanet root. The tone given by a piece of wood depends upon its size, thickness, etc. Therefore, a test must be comparative. Cut square plates of equal size and thickness of a known wood and of the wood to be tried. Place the center of the plate upon the end of a cork or spool placed upon a table near the edge. Press the center of the plate of wood with the thumb and bow it near one of the corners. This will give the lowest note such a plate can produce, or the normal tone. The higher the tone, the better the wood.—T. S.

(19) Self-Propeller.—This approaches the perpetual motion problem, which has not been solved as yet. We know of nothing unless animated nature is a mechanical device.

(19) Mechanical Device.—Not in a mechanical sense. If built of good material, it would probably be perpetual motion, which is an impossibility. A machine could easily be made so fragile as to go to pieces when set in motion.—Y.

(20) Relief Maps.—Make the original in intaglio in plaster of Paris. Then beat papier mache into its cavities with a brush, as making paper cliches for electrotyping. See query No. 5 in SCIENTIFIC AMERICAN, December 15, 1888.—W.

(20) Relief maps are made in clay or wax and a plater cast taken from which a relief cast may be taken in plaster or papier mache. To make the papier mache cast requires that the mould of plaster should be backed by a stone slab, to allow of pressure by beating the papier mache into the mould with a stiff brush, and applying pressure with a cushion of sponge. Oil the moulds wih linseed oil to prevent sticking.

(21) Utilization of Leather Scraps: Paper Ware.—These are trade secrets; have tried to find them out, and have failed.

(21) Sundry Recipes.—I recommend a "Technical Receipt Book," which largely treats of artificial leathers, papier mache, and water proofing. The chapter on imitations and substitutes covers a large range. See pp. 174 to 184. Paper gas pipe, bottles, etc., p. 454, 455. Papier mache for buckets, spittoons, etc., pp. 62 and 63. All of which appertains to this query.—G. D. H.

(22) Grafting Pear Trees.—Spring if done outdoors; on small stocks, it may be done indoors in winter, the stocks being kept in a cellar. There are good articles on the subject in Appleton's Cyclopedia. Also see SCIENTIFIC AMERICAN SUPPLEMENT, No. 122.

(22) Grafting.—For an article on the art of grafting see SCIENTIFIC AMERICAN SUPPLEMENT, No. 122. For a good grafting wax see Note and Query No. 16 (present list). The best time depends upon the season; after the sap starts and before budding time.

(23) Boiling Limed Eggs: Making Cider Vinegar.—(*a*) Try boiling slowly, beginning with cold water and bringing it to a boil. The eggs will then be cooked. If this does not answer, make a pin hole in the large end. (*b*) Add to your barrel, a quantity of the mother or lees of vinegar. Leave bung hole open; you may stick the neck of a bottle into it.—S. S.

(23) Limed Eggs.—We know of no way to prevent limed eggs from cracking when boiled. It is the confined gas expanded by heat that cracks them. Add a little yeast, ½ a pint to a barrel, to start your vinegar.

(24) Varnish for Maps.—Use Canada balsam or dammar varnish. The principal trouble will be in removing the old wax. The paper must be perfectly dry.—A. A. W.

(24) Mounted maps are sized with thin white glue and varnished with mastic.

(25) To Bleach Ivory: Cleaning Marble.—Bleach ivory by exposure to the sun under glass, or soak in a solution of binoxide of hydrogen. To clean marble, mix a quantity of the strongest soap lye with quicklime to the consistency of cream and lay on the stone for a day, clean it off afterward and rub with putty powder or whiting.

(25) To bleach ivory, place the ivory in a saturated solution of alum for an hour. Polish with a woolen cloth and wrap in linen to dry. Also with peroxide of hydrogen, to 1 pint add 1 ounce aqua ammonia. Warm, soak the ivory for 24 hours, wipe and polish with chalk.

(26) Refining Cotton Seed Oil.—Ten tons of crude oil are treated with 30 cwt. caustic soda lye of 10° to 12° Twaddell at 60° Fah. After agitation, if oil is not yet colorless more lye is added, and eventually all is left to stand 12 or 15 hours. The clear oil is then run off, washed, and bleached with chloride of lime or exposure to sun. It may be used directly to fry in, as lard.

(26) Refining of Cotton Seed Oil.—To 100 gallons crude oil add gradually 3 gallons caustic potash lye (45° Baume), with constant stirring for several hours; or, the same quantity of oil, add 6 gallons soda lye of 25° to 30° Baume, heat to 200° to 240° Fah., with constant stirring. Allow it to settle and cool. Decant the clear oil and filter the residue with canvas bags and pressure. When properly and cleanly done, the refined oil has the color, transparency, and taste of olive oil, and is largely used for culinary purposes, and used as an adulterant of olive oil.

(27) Bell Telephone, Battery, etc.—1. No. 2. Use No. 36 copper wire, silk covered. Wind to 80 ohms resistance. This will require about 35 feet of wire. 3. A properly made single contact transmitter will give every satisfaction. The multiple-contact instruments are sometimes considered more sensitive. 4. For details on telephone apparatus, consult "Bell's Electric Speaking Telephone," by Prescott. 5. Lead is unsuitable, as it will not hold the carbons firmly. Dip the dry carbon tops in melted paraffine, copper-plate them, and cast the plate in type metal. This will give a first class job. You may cast the cover directly around the carbons if you wish. It will not crack them. 6. The cast iron-zinc couple excited by caustic soda is probably best for your purposes.

(28) Erasing Ink.—Oxalic acid mixed with citric acid may be used. There are two distinct species of red ink, aniline and carmine, on the market, and some will be found hard to remove.

(28) For Ink Eraser.—Equal parts of cream of tartar and citric acid in solution with water. Or, a more powerful one, a saturated solution of oxalic acid in water. The red inks are made of various bases for the color, as Brazil wood, cochineal, and aniline red. The aniline red may be removed by alcohol acidulated with nitric acid. No receipt for the other reds.—G. D. H.

(29) Driving ⅛ H. P. C. and C. Motor.—Your water power (⅝ tap, 25 feet head) is ample. Donaldson's "Water Wheels" gives details of such matters. For battery, you would need large bichromate cells, say one gallon each. Eight or ten such cells should suffice.—C. H. P.

(30) Tempering Steel.—SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 71, 36, 37, 95, 103, 105, and many others treat of this subject of tempering steel.—Sup.

(30) Tempering Tools.—To temper cutlery, daggers, bowie knives, butcher knives, etc. Edged cutlery should be hardened before the blades are finished or sharpened to prevent cracking. Should be heated to the lowest temperature at which the particular kind of steel that it is made of will harden. If of German or spring steel, a full cherry red; if of tool steel, a lesser brightness in the heat. A slow fire that is long enough to heat the whole length of the blade equally is necessary. When at the proper heat, plunge the blade exactly vertical in water at shop temperature. Add a little salt, a handful to a pail. Then smear the surface thickly with whale oil or linseed oil and heat carefully over the open fire, so as not to overheat the point, until the oil flashes flame all along the blade. Then plunge vertically in oil or warm water. See also a valuable paper by Joshua Rose on The Hardening and Tempering of Steel, in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 95, 103, 105.

(31) Rubber Oxygen Bag.—It is best to buy one. Make of rubber cloth (cotton drill coated with rubber), double seaming at joints, and paying same with India rubber cement. A copper or brass reflector can be silvered by regular electroplating process. First amalgamate the surface to be plated. Directions for plating can be found in many books and back numbers of SCIENTIFIC AMERICAN SUPPLEMENTS.

(31) H. P.—Bags for Gas.—Rubber bags suitable for oxygen gas are beyond the ways and means of an amateur. We recommend you to obtain one through the rubber trade. The silvering of a metal reflector should be an electro deposit, which you will find described and illustrated in SCIENTIFIC AMERICAN SUPPLEMENT, No. 310. The polishing of the silver surface you may do by rubbing the surface with a buckskin pad stuffed with cotton and wet with a paste of rouge and water.

S. H. sends a beetle specimen, and says: The inclosed beetle was found in a pine seat of a painted chair. It was embedded in a cavity about 1¼ inches deep. The writer having been in the furniture business a number of years, and this being the first instance under his notice of an insect attacking painted furniture, would be under obligations should you enlighten him concerning the name, habits, and other information relating to the subject.—A. Prof. C. V. Riley, of the U. S. Department of Agriculture, Division of Entomology, says the specimen is a common longicorn beetle known as *Monohammus scutellatus*, which is a common borer of pine trees. It is found all through the Northern United States, infesting, of course, only standing trees. It remains for a long time in its preparatory stages, and is also under unnatural conditions capable of considerable retardation of development. Either in the larva or pupa state it was living in the tree when it was cut, and its particular burrow was undisturbed by the sawing and the subsequent manufacture of the chair, from the seat of which it afterward emerged. Instances of this kind are not uncommon, and all are to be explained in this way. It does not, of course, as S. H. imagines, "attack painted furniture."

☞ Books or other publications referred to above can, in most cases, be promptly obtained through the SCIENTIFIC AMERICAN office, Munn & Co., 361 Broadway, New York.

TO INVENTORS.

An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

December 11, 1888,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Acid proof receptacle and lining therefor, E. R. Rand ... 394,296
Adding machine, W. Snider ... 394,219
Air, apparatus for carbureting, C. M. Fulkerson ... 394,480
Alarm. See Electric alarm.
Amalgamating apparatus, W. A. Koneman ... 394,493
Animals, preparing food for, J. R. Barret ... 394,431
Awning, H. B. & F. X. Coyle ... 394,341
Axle box lid, W. H. Lawrence ... 394,378
Axle lubricator, car, F. C. Hockensmith ... 394,362
Bag. See Saddle bag.
Baling press, A. Freytag ... 394,261
Banjo, E. J. Cubley ... 394,159
Banjo, J. J. Doyle ... 394,348
Banjo, W. R. Wood ... 394,530
Barrel stand, W. Beckert ... 394,439
Barrel tester, F. P. Bixler ... 394,444
Basin, bath tub etc., set wash, W. Scott ... 394,404
Basins, sinks, etc., trap for, W. Scott ... 394,405
Battery. See Secondary battery.
Battery plates, making secondary, L. Duncan, 394,472, 394,473
Bearing, roller, R. W. Hent ... 394,369
Belt fastener, J. Snow ... 394,412
Belting, G. F. Page ... 394,503
Berth, temporary ship's, G. Hurson ... 394,186
Bin. See Grocer's bin.
Binder, temporary, G. V. Clifford ... 394,249
Binder, temporary, W. M. Kinnard ... 394,189
Binder, temporary, W. B. Lane, Jr. ... 394,496
Binder, temporary, W. D. Ready ... 394,304
Bit. See Bridle bit.
Block. See Cartridge loading block. Snatch block.
Blower, grate, W. S. Harris ... 394,359
Boiler. See Steam boiler.
Boilers, etc., covering or jacket for steam, J. M. Riley ... 394,398
Bolt turning machines, blank feeder and gripping die for, C. H. Graham ... 394,170
Book rest for the use of invalids, T. H. D. May ... 394,196
Book, sample, J. E. Spears ... 394,516
Boots or shoes, follower or form for, G. H. Clark ... 394,154
Bottle fastener, automatic, T. B. Howe ... 394,490
Bottle stopper, Hitchcock & Chapman ... 394,182
Bottle stopper, Philburn & Moors ... 394,294
Box. See Honey box.
Box fastener, J. Wotruba ... 394,320
Box opener and tobacco claw, D. W. Thacker ... 394,547
Brake. See Car brake. Vehicle brake. Wagon brake.
Brick machine, Ross & Keller ... 394,510
Brick machine, hydraulic, H. Von Metzlaff ... 394,528
Bridle bit, T. Brabson ... 394,453, 394,454
Bridle blinder, A. Pearl ... 394,389
Broach, G. Thompson ... 394,226
Broom, F. S. Stark ... 394,410
Buckboard, H. L. Sweet ... 394,519
Bucksaw frame, C. Eisenhardt ... 394,477
Building material for architectural purposes, composition of, C. Straub ... 394,518
Burner. See Hydrocarbon burner. Oil burner.
Button setting machine, E. H. Taylor ... 394,546
Button setting machine, J. H. Vinton ... 394,231
Buttons, machine for rubbing and polishing, E. P. Howe ... 394,185
Camera. See Photographic camera.
Can. See Oil can.
Can, J. F. Maxson ... 394,381
Caps, making, Dormer & Marks ... 394,469
Car brake, B. Boyer ... 394,452
Car coupling, L. M. Fox ... 394,165
Car coupling, G. A. Guice ... 394,357
Car coupling, E. P. Johnston ... 394,368
Car heater, L. G. Gilbert ... 394,354
Car heating system, auxiliary, W. Buchanan ... 394,456
Car mover, A. L. Dominy ... 394,254
Car uncoupling device, W. O. Rutledge ... 394,301
Car, vestibule, N. P. Cowell ... 394,339, 394,340
Car, vestibule, T. E. Thompson ... 394,313
Car wheel, S. W. Tanner ... 394,312
Cars, automatic fan for, J. Sands ... 394,402
Cars, grip for cable railway, B. L. Harris ... 394,539
Cars, system for heating and ventilating, E. F. Roberts ... 394,508
Carpet fastener, stair, D. Walker ... 394,315
Carriage, O. Gilsmann ... 394,263
Carriage, F. W. Zimmer ... 394,239
Carrier. See Cash carrier.
Cartridge case, J. C. Kelton ... 394,376
Cartridge case and means for carrying the same, J. C. Kelton ... 394,375
Cartridge feed pack, J. C. Kelton ... 394,374
Cartridge loading block, W. H. Pack ... 394,288
Cartridge pack, J. C. Kelton ... 394,373
Case. See Cartridge case. Show case.
Cash carrier, S. W. Barr ... 394,326
Caster frame, J. J. Sullivan ... 394,310
Centrifugal machine, D. M. Weston ... 394,234
Chain links, machine for uniting, D. D. McKernan ... 394,199
Chair. See Rail chair.
Chimney cap, A. E. Clute ... 394,337
Chuck, E. A. Howe ... 394,364
Clutch, friction, W. H. Johnson ... 394,367
Coffee, coating, W. Hindhaugh, Jr. ... 394,181
Coin counter, match safe, and cane handle, combined, J. M. Basinger ... 394,327
Collar fastening, dog, J. M. Riley ... 394,506
Concentrator, M. McAneny ... 394,197
Condensing liquids, apparatus for, J. H. Bassler, 394,432 to 394,434
Contact maker, electric, J. S. Farmer ... 394,164
Copy holder, R. W. Bloemeke ... 394,449
Corn husker, S. C. Harper ... 394,177
Corn husker, D. T. Phillips ... 394,504
Cotton picker, J. W. Wallis ... 394,316
Coupling. See Car coupling. Thill coupling.
Crayons, automatic holder for lead, G. Sandell ... 394,401
Cuff blank hem folding and cutting machines, stamping device for, F. B. Ide ... 394,274
Cuff holder, R. J. Newman ... 394,206
Cultivator, E. Case ... 394,334
Cultivator, C. Mendenhall ... 394,283
Cup. See Oil cup.
Cut-off for steam engines, draught, A. M. Zimmerman ... 394,430
Cut-off gear for steam engines, B. V. Nordberg ... 394,501
Cut-off or regulator for gang boilers, automatic, W. U. Fairbairn ... 394,257
Cutter. See Paper cutter.
Cutter head, J. T. Grzybowski ... 394,175
Dental plugger, pneumatic, L. E. Custer ... 394,464
Digger. See Potato digger.
Dispatch tube, electric, W. Dulles, Jr ... 394,161
Display rack, J. S. Davis ... 394,252
Door hanger, G. W. Warner ... 394,317
Dovetails in wood, forming, D. B. Wesson ... 394,423
Dovetail slots in wood, forming, D. B. Wesson ... 394,422
Drawer, record, G. W. Newberry ... 394,500
Drill. See Rock drill.
Drill, T. Gosernd ... 394,169
Drilling, channeling, and gadding machine, combined, W. L. Saunders ... 394,212
Dust collector, H. Simon ... 394,408
Dust collector and separator, Allington & Curtis ... 394,240
Dye vat, J. P. Delahunty, Sr. (r) ... 10,973
Dyeing, V. G. Bloede ... 394,447
Electric alarm and water gauge, J. H. Johns ... 394,491
Electric distribution by secondary batteries, Z. Latshaw ... 394,541
Electric machine, signaling dynamo, E. Gray ... 394,172
Electric motors or generators, safety device and signal for, C. J. Van Depoele ... 394,525
Electric motors, safety device for, C. J. Van Depoele ... 394,417
Electro-magnetic switch, W. W. Griscom ... 394,485
Electro-mechanical movement, B. Cadwallader ... 394,332
Engine. See Gas and caloric engine. Rotary steam engine. Triple expansion engine.
Engine crosshead, steam, L. D. Davis ... 394,345
Engines, steering apparatus for traction, C. A. Copeland ... 394,460
Extracts, making, J. H. Lorimer ... 394,191
Fan, chair, G. B. Ulrichs ... 394,229
Fan, exhaust, D. A. Sailor ... 394,400
Faucet for wagon tanks, measuring, G. H. Perkins ... 394,391
Feed regulator, J. A. McAnulty ... 394,278
Feed water circulator, J. P. Kelly ... 394,372
Feed water heater, Vogt & Burns ... 394,526
Fence, J. A. Barber ... 394,241
Fence, portable, S. Hobson ... 394,361
Fence post, G. E. Hamilton ... 394,266
Fertilizer distributer, E. P. Johnston ... 394,369
File or book holder, J. H. Ferguson ... 394,258
Fire escape, T. J. Baker ... 394,149
Fire escape, J. Hotchkiss ... 394,272
Fire escape, T. B. Nutting ... 394,502
Flux, manufacturing, J. Webster ... 394,233
Frame. See Bucksaw frame. Caster frame.
Fuel compound, L. Haas ... 394,486
Furnace. See Hot air furnace.
Furnace, J. W. Cassidy ... 394,152
Furnace grate, T. H. Sears ... 394,545
Furnaces, apparatus for charging and drawing, S. T. Wellman ... 394,419, 394,420
Furnaces, combination mechanism for charging and drawing, S. T. Wellman ... 394,421
Fuse, electrical, J. Macbeth ... 394,192
Gas or caloric engine, A. Rollason ... 394,299
Gases, apparatus for testing mine, T. Shaw, 394,214, 394,215
Generator. See Steam generator.
Gold from quartz or gangue, separating, G. Sweanor ... 394,225
Grading and ditching machine, J. B. Gavin, 394,534, 394,535
Grain, apparatus for heating, R. C. & G. E. Hawley ... 394,267
Grain, apparatus for mashing, C. Kaestner ... 394,370
Grinding mill, G. A. Young ... 394,238
Grocer's bin, L. Johnston ... 394,276
Hammer, pneumatic, G. Glossop ... 394,483, 394,484
Handle. See Shovel handle.
Hanger. See Door hanger. Loop hanger.
Harness mountings, die for, D. McCance ... 394,282
Harp, J. C. Dietz ... 394,467
Harrow, J. H. Sharp ... 394,514
Harvester, C. F. Search ... 394,513
Harvesters, cutting apparatus for, D. H. Bennett ... 394,441
Harvesters, knotter for, W. F. Goad ... 394,536
Hat, felt, F. W. Cheetham ... 394,336
Hay rake, horse, E. McGovney ... 394,198
Head rest, C. W. Hooven ... 394,271
Heater. See Car heater. Feed water heater.
Heating purposes, apparatus for vaporizing and burning non-explosive oils for, I. Hayes ... 394,179
Heel attaching machine, F. F. Raymond, 2d ... 394,298
Hoisting apparatus, F. M. Davis ... 394,344
Hoisting bucket, G. W. Rawson ... 394,297
Holder. See Copy holder. Cuff holder. File or book holder. Sash holder. Twine holder.
Honey box, H. D. Davis ... 394,160
Hoop machine, barrel, E. Olund ... 394,548
Horse detacher, J. W. Cronan ... 394,157
Horseshoe, M. Payne ... 394,388
Hose, elastic, E. Tivey ... 394,227
Hot air furnace, H. R. Gillingham ... 394,355
Hydrant, C. G. Ette ... 394,478
Hydrant, P. White ... 394,529
Hydraulic press, L. Miller ... 394,383
Hydraulic press, H. Von Mitzlaff ... 394,527
Hydrocarbon burner, L. Stevens ... 394,517
Hydrogen sulphide, obtaining, Parnell & Simpson 394,387
Indicator. See Station indicator.
Insect destroyer, W. Neef ... 394,205
Insole, spring, D. A. Johnson ... 394,188
Insulators, wire holder for, E. L. Lloyd ... 394,380
Iron. See Singletree iron. Whiffletree iron.
Jack. See Lifting jack. Wagon jack.
Jewelers' use, machine for cutting solder for, S. F. Merritt ... 394,201
Jewelry, Traitel & Rawiszer ... 394,523
Jute and other fibrous plants, machine for stripping, W. Menzies ... 394,284
Key, T. Donahue ... 394,468
Knife. See Surgical knife.
Knob, stop, M. Clark ... 394,246
Ladder, step, B. F. Johnson ... 394,492
Lamp hanger, D. Chisholm ... 394,153
Lamp support, extension, T. D. Stone ... 394,224
Lamps, cut-out for electric, C. Heisler ... 394,180
Lamps, extension standard for, J. Kintz (r) ... 10,974
Lamps, wick raiser for central draught, Z. Davis ... 394,465
Latch, E. S. Winchester ... 394,427
Latch, reversible, J. H. Woolaston ... 394,426
Lathe tool for finishing and polishing, W. M. Seeger ... 394,406
Lathing, metallic, B. Scarles ... 394,403
Lifting jack, A. A. Strom ... 394,308
Light. See Pavement and floor light.
Limekiln, R. H. Burns ... 394,151
Lock. See Nut lock. Permutation lock. Seal lock.
Locomotives, clutch mechanism for the driving shafts of, A. Matthes ... 394,194
Loom shuttle spindle, J. M. Cheney ... 394,458
Looms, let-off motion for, J. J. Honan ... 394,184
Lubricator. See Axle lubricator.
Lubricator, J. Mense ... 394,497
Mainspring winder, A. F. Robbins ... 394,507
Match safe and cigar clipper, combined, E. L. Lake ... 394,

© 1888 SCIENTIFIC AMERICAN, INC.

Mill. See Grinding mill. Roller mill.
Motor, C. C. Epp ... 394,256
Mowers, reapers, etc., knife for, W. S. Elliott ... 394,349
Needle threader, A. Scherkenbach ... 394,308
Nest, hen's, W. W. Rhodes ... 394,397
Nut lock, G. Cook ... 394,462
Nut lock, G. H. Griffin ... 394,537
Oil burner, J. Carnes ... 394,245
Oil can, G. H. Perkins ... 394,390
Oil cup, W. H. Wilkinson ... 394,424
Oil distributer, E. Williams ... 394,319
Oils, apparatus for vaporizing and burning hydrocarbon, E. O. Daniels ... 394,343
Oliver, W. J. Stevens ... 394,223
Ordnance, firing mechanism for, A. C. Koerner ... 394,190
Organ actions, pitman for reed, M. Clark ... 394,248
Organ, reed, M. Clark ... 394,247
Organ, reed, J. A. Smith ... 394,218
Oven for gasoline and other vapor stoves, N. D. Sisco ... 394,216
Oyster dredge, W. Calam ... 394,333
Packing and barreling machine, D. F. Shoup ... 394,305
Packing or filling, cement, H. W. Johns ... 394,275
Packing, piston rod, G. H. Crandall ... 394,156
Paint, F. M. Reed ... 394,396
Paint, roof, J. B. Washburn ... 394,318
Paper calendering machine, C. E. Torrance ... 394,522
Paper cutter, Booth & Williams ... 394,451
Paper cutter, J. A. Eastin ... 394,476
Paper machines, stuff regulator for, L. E. Smith ... 394,306
Paper receptacle, W. E. Crume ... 394,158
Paper waxing machine, C. E. Haynes ... 394,268
Pavement and floor light, J. C. French ... 394,260
Pen, drawing, J. E. Miller ... 394,202
Pen, fountain, O. F. Grant ... 394,171
Pen, reservoir, A. Hommel ... 394,183
Permutation lock, G. E. Hyatt ... 394,273
Photograph exhibitor, E. S. Miller ... 394,498
Photographic apparatus, M. J. Steffens ... 394,221
Photographic camera, W. C. Gibbs ... 394,353
Photographic copying process, G. Bay ... 394,437
Piano action, J. W. Cooper ... 394,251
Piston, T. Poore ... 394,295
Pitman, L. A. McAnulty ... 394,280, 394,281
Plane, bench, W. Stevenson ... 394,411
Planing machine, metal, C. Holly ... 394,363
Planter, corn, F. F. Harman ... 394,176
Planter, cotton, D. H. Ellington ... 394,163
Planters, attachment for corn, J. Fulton ... 394,351
Poison distributer for plants, Gramling & Adler ... 394,264
Police nippers, Eisaman & Rome ... 394,162
Post. See Fence post.
Potato digger, T. N. Nicholson ... 394,286
Power, means for transmitting, E. F. Autenrieth, 394,323, 394,324
Power tester, coin-controlled hand, A. F. Martel ... 394,193
Press. See Baling press. Hydraulic press.
Pressure, apparatus for controlling, J. I. Thornycroft ... 394,520
Propeller, screw, B. F. Sparrow ... 394,414
Pruning implement, G. James ... 394,187
Puller. See Stump puller.
Pulleys, bushing for split, Sibley & Ware ... 394,407
Rack. See Display rack.
Rail chair, switch, A. A. Strom ... 394,309
Rails, die for forging shifting, A. Walter ... 394,232
Railway frog, C. G. Lea ... 394,379
Railway grip and crossing device, cable, J. J. Graff 394,356
Railways, grip for cable, C. Scholz ... 394,512
Railway signal, N. T. De Golyer ... 394,466
Railway switch stand, A. A. Strom ... 394,415
Railway ties, manufacture of tubular, D. Wilson ... 394,326
Rake. See Hay rake.
Rake, C. Thorp ... 394,521
Range or cooking stove, kitchen, R. A. Perrott ... 394,293
Regulator. See Feed regulator. Speed regulator.
Rock drill, electro-magnetic air compressing, R. G. G. Moldenke ... 394,203
Rock drill, steam, Nutting & Githens (r) ... 10,975
Roller mill, J. A. McAnulty ... 394,279
Roofing, O. Boklen ... 394,450
Rotary steam engine, J. S. Byers ... 394,242
Saddle bag or satchel, J. K. P. Wright ... 394,321
Salts of tetrazo-ditolyl or diphenyl on dihydroxides of toluene or their sulpho-acids, action of, R. G. Williams ... 394,425
Sand band for vehicles, J. J. Botter ... 394,150
Sash and shade, combined window, Banyer & Printz ... 394,328
Sash holder, W. H. Fye ... 394,352
Satchel, D. S. Hammond, Jr ... 394,487
Saw, F. Stephens ... 394,222
Sawing attachment for shapers, G. M. Cobb ... 394,338
Sawing machine, J. N. Britz ... 394,455
Screen. See Window screen.
Seal, J. H. Bickford ... 394,531
Seal lock, M. J. Moran ... 394,204
Secondary battery, L. Duncan ... 394,471, 394,474
Sewers, means for flushing, T. Galvin ... 394,166
Shaft bearer, F. M. Beck *et al* ... 394,438
Shafting, speed regulator for, J. G. Baumann ... 394,435
Shirt, T. J. Holmes ... 394,270
Shoe soles, machine for splitting, J. F. La Borde ... 394,277
Shovel handle and tamping bar, combined, J. M. Jackson ... 394,366
Show case, F. X. Ganter ... 394,481
Shutter bower, J. A. Dill ... 394,253
Signal. See Railway signal.
Singletree iron, J. L. Blake ... 394,445
Sink trap, M. W. Scannell ... 394,213
Sleigh, F. W. Meyer ... 394,382
Snatch block, W. McBride ... 394,499
Snow plow, E. E. Caldwell ... 394,244
Snow plow, H. L. Fraser ... 394,350
Soap, Packard & Struble ... 394,289
Speed governing apparatus, A. Rollason ... 394,300
Spindle bearing, T. C. Dill ... 394,347
Spinning machines, spindle driving device for, T. H. Logan ... 394,542
Spinning spindles, support for, J. T. Meats ... 394,200
Spinning spindles, whirl for, T. Hall ... 394,265
Spring. See Vehicle spring.
Sprocket wheel, J. Chase ... 394,385
Square, dressmaker's, F. A. Tripp ... 394,524
Stand. See Barrel stand. Railway switch stand.
Staples, machine for making, W. G. Slater ... 394,217
Station indicator, W. P. Wood ... 394,237
Station indicator and advertising cabinet, A. J. Kellogg ... 394,371
Steam boiler, E. Reynolds ... 394,211
Steam generator, L. D. Copeland ... 394,461
Steam trap, E. H. Gold ... 394,167
Steam trap and feeder, H. Creamer ... 394,463
Steering apparatus, R. Grignon ... 394,174
Steering gear, steam, F. B. Turner ... 394,314
Stool, folding, Barber & Ostemann ... 394,325
Stopper. See Bottle stopper.
Stove, heating, M. Hayden ... 394,360
Stovepipe elbow, Evans & Jackes ... 394,479
Stoves, lining for the fire pots of, S. Kops ... 394,494
Stud or hook setting machine, S. D. Tripp ... 394,228
Stump puller, Copp & Remaley ... 394,158
Surgical knife, J. Schmitt ... 394,304
Switch. See Electro-magnetic switch.
Syringe, J. M. Coombs ... 394,250
Tablet or plate for displaying luminous figures, T. G. H. Nicholson ... 394,386
Tally, baseball umpire's, R. Robyn ... 394,399
Tea kettle cover, J. D. Perry ... 394,392
Telegraph, printing, G. V. Sheffield ... 394,302
Telephone central station apparatus, Vail & Seely ... 394,230
Telephone systems, bridge for cutting in new loops in, G. S. Maxwell ... 394,195
Telephones, ringing-off device for, Griffith & Burbank ... 394,173
Tent, H. Gentzen ... 394,262
Thermotic circuit closer, W. H. Soley ... 394,413
Thill coupling, L. D. Carl ... 394,533
Thill coupling, W. H. Pardee ... 394,290, 394,291
Tinting fabrics, V. G. Bloede ... 394,446
Tinting or finishing cotton fabrics, Bloede & Bancroft ... 394,448
Track and lifting jack, T. J. Reamy ... 394,395
Trap. See Sink trap. Steam trap.
Trap doors, device for operating, J. C. French ... 394,259
Trays or boxes, case for holding and presenting, E. Reynolds ... 394,210
Treadle, J. Dufraine ... 394,470
Tricycle, T. O'Brien ... 394,287
Tricycle, C. Yingst ... 394,429
Triple expansion engine, H. F. Gaskill ... 394,482
Truck, R. McMillin ... 394,385
Truck, hand, W. H. Berger ... 394,442, 394,443
Truck, lumber, W. H. Coleman ... 394,459
Trunk, W. L. Hocker ... 394,488
Tube. See Dispatch tube.
Tug, hame, L. G. Gustavel ... 394,358
Twine holder and cutter, L. Goodyear ... 394,168
Type distributing machine, L. Dow ... 394,255
Type, white letter, R. D. De Little ... 394,346
Typewriter cabinet, J. Kiefer ... 394,377
Typewriters, erasing shield for, L. D. Craig ... 394,342
Typewriting machine, T. B. Harrison ... 394,410
Umbrella or parasol runners, retainer for, T. J. Wallace ... 394,418
Underground conduit, electric, D. O. Paige ... 394,207
Valve apparatus for automatic vacuum brakes, F. A. Bruggemann ... 394,330
Valve, balanced oscillating, W. T. Reaser ... 394,505
Valve, blast furnace tuyere, F. McCarthy ... 394,384
Valve controller, thermo-electric, F. M. Sparrow ... 394,307
Valve operating device, electric, F. M. Sparrow ... 394,220
Valve, steam, G. A. Boyden ... 394,532
Vat. See Dye vat.
Vehicle, C. M. Blydenburgh ... 394,329
Vehicle brake, A. C. T. Bautaine ... 394,436
Vehicle running gear, S. S. Schaff ... 394,544
Vehicle spring, S. H. Raymond ... 394,393
Vehicle, two-wheeled, A. F. Shuler ... 394,515
Velocipede, ice, P. A. Snyder ... 394,409
Vessels, hull of, R. H. Tucker ... 394,416
Vise, J. Parkinson ... 394,292
Vises, making metal, R. Johnson ... 394,540
Wagon brake, H. Hunt ... 394,365
Wagon jack, T. Surtees ... 394,311
Washer blank, G. H. Griffin ... 394,538
Water closet flush tank valve, P. V. Dwyer ... 394,475
Water, purifying, C. C. Peck ... 394,208
Weigher and register, automatic grain, Bender & Bingman ... 394,440
Well boring device, G. Atkinson ... 394,322
Well drilling machine, T. G. Chapman ... 394,457
Wheel. See Car wheel. Sprocket wheel.
Wheel, D. L. Rush ... 394,511
Whiffletree iron, H. K. Porter ... 394,209
Whip attachment for holding ribbons, banners, etc., J. G. Rahner ... 394,509
Whistle, S. R. Briggs ... 394,243
Window bead fastener, J. Mott ... 394,285
Window screen, J. M. Hommel ... 394,489
Window screen, Willard & Wilson ... 394,236
Window shade, W. W. Whitehead ... 394,235
Wire bending tool, F. Brune ... 394,331

DESIGNS.

Bed case, folding, C. Teufel ... 18,813
Coffin screw, O. McCarthy ... 18,796
Fan, C. L. Davis ... 18,792
Glassware, ornamentation of, B. Davies ... 18,791
Match box, L. W. Fairchild ... 18,794
Oil cloth, C. T. & V. E. Meyer ... 18,797 to 18,808
Radiator, J. F. Packer ... 18,809, 18,810
Stove, gas, A. T. Henderson ... 18,795
Strap, E. B. Stimpson ... 18,811, 18,812
Thrashing machine casing, W. W. Din ee ... 18,793

TRADE MARKS.

Beds, folding, J. H. Little & Co ... 16,087
Bitters, Meade-Van Bokkelen Company ... 16,077
Button fasteners, metallic, American Shoe Tip Company ... 16,071
Candies, cake, and pastry, J. Morton's Sons ... 16,078
Charlotte russe, R. V. Kane ... 16,074
Coal, J. H. Leonard ... 16,075
Coats, pantaloons, vests, shirts, overalls, and men's furnishings, Stanton, Sampson & Co ... 16,096
Cutlery, A. Vom Dorp ... 16,081
Dyspepsia and indigestion, preparation for the cure of, Bowanee Medicine Co ... 16,072
Hammers, Simmons Hardware Company ... 16,094, 16,095
Hams, shoulders, and bacon, Los Angeles Cold Storage Company ... 16,076
Ice cream and water ices, R. V. Kane ... 16,073
Meats, preserved, Cunningham & De Fourier Company ... 16,083, 16,084
Music boxes, M. J. Paillard & Co ... 16,089
Pastes for skin diseases and for purifying the complexion, N. N. Bickford ... 16,082
Porous plaster, throat tablets, infant medicine, tonic, and balsam, Southern Company of New York ... 16,080
Salve, Sharrer & Murphy ... 16,079
Shade rollers, spring, Saginaw Manufacturing Company ... 16,093
Shoes, O. Finnigan & Son ... 16,086
Silk fabrics, R. B. MacLea & Co ... 16,088
Skirts, ladies', L. Dryfoos & Co ... 16,085
Soap, hard, J. Reardon & Sons ... 16,091
Tacks, carpet, J. H. Parks ... 16,090
Transom lifters, J. F. Wollensak ... 16,097
Trunks, bags, and valises, O. F. Sage ... 16,092

A Printed copy of the specification and drawing of any patent in the foregoing list will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian Patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated, the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

FRET SAW OR BRACKET WOODS
PLANED READY FOR USE.
Send stamp for catalogue.
HENRY T. BARTLETT,
Manufacturer of Cabinet Woods and Veneers.
200 LEWIS ST., NEW YORK.

USE THE EDISON Mimeograph
FOR MANIFOLDING AUTOGRAPHIC AND TYPE WRITTEN LETTERS, DRAWINGS, MUSIC, ETC.
3,000 COPIES 16 STYLES & SIZES
RECOMMENDED BY OVER 20,000 USERS. Adapted to all Requirements
A.B. DICK Co. CHICAGO. U.S.A.

THE NEW CROTON AQUEDUCT.—Detailed description of the great aqueduct now being constructed to increase the water supply of New York City, and also of the great dam which it is proposed to build across the Croton River, at Quaker Bridge. With engravings and a map. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 558. Price 10 cents. To be had at this office and from all newsdealers.

SEBASTIAN, MAY & CO'S
Improved Screw Cutting
Foot & Power LATHES
Drill Presses, Chucks, Drills, Dogs, and machinists' and amateurs' outfits. *Lathes on trial.* Catalogues mailed on application.
165 W. 2d St., Cincinnati, O.

THE PENNA. DIAMOND DRILL & MFG. CO.
BIRDSBORO, PA., Builders of High Class Steam Engines, Diamond Drilling and General Machinery. Flour Mill Rolls Ground and Grooved.

JAMES B. EADS.—AN ACCOUNT OF the life and labors of this eminent engineer. With a portrait. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 592. Price 10 cents. To be had at this office and from all newsdealers.

"Star" Foot Lathe Swings 9x25 in. — Screw Cutting Automatic Cross Feed, etc.
LATHE
Scroll Saws, Circular Saws, Lathes Mortisers. — Catalogue Free of all our Machinery.
Seneca Falls Mfg. Co., 695 Water St., Seneca Falls, N. Y.

STANLEY'S ODD JOB
EVENTY-FIVE CENT
old by Hardware Dealer
EE ONE OF THESE TOOL

ELECTRIC LAMPS
For SPECTACULAR EFFECTS and SCIENTIFIC USES.
Either with or without Battery Power, and a full line of general
ELECTRICAL SUPPLIES
The E. S. GREELEY & CO.
5 & 7 Dey Street, New York.

HOME-MADE INCUBATOR.—PRACTICAL directions for the manufacture of an effective incubator that has been carefully tested and found to perform all that may be reasonably expected; with directions for operating. With 4 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 630. Price 10 cents. To be had at this office and from all newsdealers.

LATHES FOR CUTTING IRREGULAR FORMS SUCH AS AXE HANDLES, ETC. A SPECIALTY
BARREL HOOP AND BASKET MACHINES
VENEER CUTTING MACHINES.
HANDLE AND NULLING LATHES.
MILLING, MORTISING, GEAR & KEY SEAT CUTTING MACHINES, STAVE, HEADING AND SHINGLE MACHINES.
MANUFACTURED BY THE I.E. MERRITT MACH'Y. CO
LOCKPORT N.Y. U.S.A.

ICE-HOUSE AND REFRIGERATOR. Directions and Dimensions for construction, with one illustration of cold house for preserving fruit from season to season. The air is kept dry and pure throughout the year at a temperature of from 34° to 36°. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. 116. Price 10 cents. To be had at this office and of all newsdealers.

SETS OF CASTINGS OF MODEL ENGINES
CATALOGUES FREE.
ALSO TOOLS, GEAR WHEELS & PARTS OF MODELS
GOODNOW & WIGHTMAN BOSTON

The TRENTON ENGINE
AUTOMATIC CUT-OFF BALANCE VALVE
Highest duty, economy, and durability guaranteed.
Phenix Iron Co. Trenton, N. J., M'f'rs.
F. VAN WINKLE, Agt., 91 Liberty St., N. Y.

WEITMYER PATENT FURNACE. Boilers of Every Description.
IDE Automatic Engines, Traction and Portable Engines,
STEAM ROAD ROLLERS,
Manufactured by FOUNDRY & MACHINE DEPT., Harrisburg, Pa., U. S. A.
New York Office, Messrs. Fleming & Kimball, 17 Dey Street. New England Office, Messrs. John Post, Jr. & Co., 70 Kilby Street, Boston. Baltimore Office, Messrs. Thomas K. Carey & Bro., 26 Light Street.

PULLEYS, HANGERS, FRICTION CLUTCHES.
PROGRESS MACHINE WORKS, A. & F. BROWN, 44 Park Place, N. Y.

ELECTRICAL STRESS.—AN INTERESTING paper by Prof. A. W. Rucker, on the stresses that exist in a dielectric between conductors of different potentials. With 9 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 646. Price 10 cents. To be had at this office and from all newsdealers.

INGERSOLL ROCK DRILL CO.,
10 PARK PLACE, NEW YORK.
Improved "Eclipse" ROCK DRILLS,
For Mining, Tunneling, Shaft-Sinking, Quarrying, Submarine drilling, and for all kinds of rock excavation.
"Straight Line" AIR COMPRESSORS, Boilers, Steam and Horse Power Hoists, Electric Blasting Batteries and General Mining Machinery
Send for full descriptive Catalogue

STEAMER CITY OF NEW YORK.—Description of this new Inman twin-screw steamship, and a comparison with her principal competitors. With 4 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 641. Price 10 cents. To be had at this office and from all newsdealers.

ROCK DRILLS AIR COMPRESSORS & GENERAL MACHINERY FOR MINING, TUNNELING, QUARRY & RAILROAD WORK
RAND DRILL Co 23 PARK PLACE NEW YORK

CHARTER'S GAS ENGINE.
2 to 25 H. P.
The Simplest, most Reliable, and Economical Gas Engine in existence.
An impulse at every revolution. Perfect steadiness guaranteed for Arc or Incandescent Electric Lights.
Independent of gas works when desired, and **makes its own gas** at a cost of **65 cents per M feet**, or about **one cent per hour to each indicated H. P.**
A Perfectly Safe Motor for All Places and Purposes.
New York Agent, JOHN J. BOCKIE, 47 Dey Street.
Chicago Office and Salesroom, 152 Lake Street.
For circulars and prices, address
Williams & Orton Mfg. Co.
P. O. Box 148. STERLING, ILL.

A PRACTICAL SUCCESS.
VAN DUZEN'S PAT. LOOSE PULLEY OILER.
Thousands in satisfactory everyday use. Entire reliability and constancy demonstrated in a two years' test by (would be) Eastern skeptics. Economy shown by reasonable prices and perfect performance. Send for our "Catalogue No. 55."
VAN DUZEN & TIFT, Cincinnati, O

WATER MOTORS.
The most efficient and economical means of obtaining from one-eighth to fifteen horse power and upward. A motor which does the greatest amount of work with the use of the smallest stream of water, specially adapted for running cheaply and efficiently, Printing Presses, Elevators, Church Organs, Coffee Mills, Sewing Machines, Lathes, Dental Contrivances, and in fact, any piece of Mechanism.
Binghamton Hydraulic Power Co., 132 State Street, Binghamton, N. Y.

OIL WELL SUPPLY CO. Ltd.
91 & 92 WATER STREET,
Pittsburgh, Pa.,
Manufacturers of everything needed for ARTESIAN WELLS
for either Gas, Oil, Water, or Mineral Tests, Boilers, Engines, Pipe, Cordage, Drilling Tools, etc. Illustrated catalogue, price lists and discount sheets on request.

BARREL MACHINERY.
E. & B. HOLMES,
BUFFALO, N. Y.

WELL Encyclopedia of 700 Engravings of WELL TOOLS, Diamond Drills and Lightning Hydraulic WELL Machines. Book free, 25c. for mailing it. American Well Works, Aurora, Ill.
Branch House: 11 and 13 S. Canal St., Chicago, Ills.

ELECTRO MOTOR, SIMPLE, HOW TO make. By G. M. Hopkins.—Description of a small electro motor devised and constructed with a view to assisting amateurs to make a motor which might be driven with advantage by a current derived from a battery, and which would have sufficient power to operate a foot lathe or any machine requiring not over one man power. With 11 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 641. Price 10 cents. To be had at this office and from all newsdealers.

COMPLETE STEAM PUMP ONLY SEVEN DOLLARS
DEMAND THIS PUMP OF YOUR DEALER OR WRITE TO US FOR PRICES.
VAN DUZEN'S PATENT
VAN DUZEN & TIFT. SOLE MAKERS CINCINNATI, O.

ELECTRIC LIGHT AND POWER.
Edco system of Arc and Incandescent Lighting. Direct or in connection with the Storage Batteries of the Electrical Accumulator Co. Dynamos, Motors, Lamps, Batteries, and General Electrical Supplies.
THE ELECTRO DYNAMIC COMPANY,
924 Carter Street, Philadelphia, Pa.

© 1888 SCIENTIFIC AMERICAN, INC.

ILLUSTRATIONS.

A

Absorption of gas by charcoal... 402
Action of centrif. force on liquids 402
Air compressor, Davey's 338
Alphonso XII., steamer 371
Annunciator, electric 18
Antelope, dwarf 9
Antelopes 313
Aqueduct, New York 87
Arago, experiment 323
Auger, Richards' 130, 245
Axle box, new 227

B

Bake pan, Bicknell's 258
Balloon trip at night 375
Baltimore, cruiser 223
Band cutter and feeder 242
Bank punch, London 179
Barrel, centrifugal 230
Bath tubs, seat for 227
Battery, Brewer's 147
Battery plates, carbon 264
Batteries, movable, French 358
Bear, prehistoric 247
Bed brace, Lewis' 371
Bed clothes holder 19
Bed stay, Bethea's 291
Bees, hiving, device for 101
Belt rest 226
Bergen, ferryboat 351
Bicycle attachment 297
Binder, Owen's 258
Block for guard rails 5
Boat detaching apparatus 66
Boat propulsion 195
Boiler covering, insulated 355
Boiler feeder, Warder's 68
Boiler heater 370
Boiler, locomotive, Fuller's 310
Boiler, steam, Hedges' 116
Book holder, Harbaugh's 275
Bosom board 228
Boulogue-sur-Mer 150
Box strap, wire 146
Bracket, scaffold 371
Brake, car, new 5
Brake car, Taylor's 99
Brake lever, Dilger's 5
Brake, sled, Anderson's 306
Brace, trunk 322
Bridge, Bilbon 191
Bridge, Nebraska City 287
Bridge, Rouea 118
Bridle for brooms 244
Bridge, Forth 86

C

Cable driving plant 31
Cable support 40
Calculating machine 265
Calk for horse shoes 98
Camera, Kodak 159
Camera, pocket 231
Can opener, new 18
Car brake, new 5
Car brake, Taylor's 99
Car, cable, clutch for 122
Car coupling, New 50
Car coupling, Chisholm's 242
Car coupling, Clark's 130
Car coupling, Foster's 290
Car coupling, McKagne's 19
Car coupling, McNab's 67
Car coupling, Weaver's 275
Car, freight 370
Car stop, Walker's 339
Car stove, Wheeler's 50
Car wheel and axle, Smith's 290
Car wheel roller 178
Carbon battery plates 264
Carpet weaving 199
Carriage, electric 215
Carriage elevator 262
Cartridge shell cutter 179
Casino 150
Cellars, lining for 35
Centenarians 295
Centering apparatus 312
Chelydra, Temminck's 38
Chimney, tall 239
Chimpanzee, young 201
Chromatrope, new 36
Churn, Campbell's 402
Churn, Snyder's 339
Chute, coal, Du Bois' 179
Clamp for fruit jars 18
Clamp for pipes 131
Clamp, paper hanging 146
Clamp, Tarbell's 66
Cleat for vessels, Foran's 306
Clothes drier, Cox's 244
Clubs, swinging of 57
Clutch, cable car 133
Coal chute, Du Bois' 179
Cobra de capello 55
Cohesion 25, 402
Collision at sea 319
Comb, curry, Blythe's 84
Compass for projecting Oersted's experiment 386
Comptometer, Feit's 265
Compressor, air, Davey's 338
Cooler for ales 131
Cooper, Eli 153
Corea by native artists 20
Corn husker, Mehring's 130
Coupling, car 19
Coupling, car, Byrne's 50
Coupling, car, Chisholm's 242
Coupling, car, Clark's 130
Coupling, car, Cleveland & Dawson's 386
Coupling, car, Foster's 290
Coupling, car, McNab's 67
Coupling, car, Weaver's 275
Coupling, trunk strap 101
Covering, insulated, for boilers 355
Cow, wild, skeleton of 329
Crank, Hanlay's 274
Cricket plague in Algeria 135
Cruiser Baltimore 223
Cruiser Vesuvius 271
Cuff holder 228
Cultivator attachment 130
Curtain bracket, Scott's 306
Curtain, vehicle 163

D

Dabbing motion, Unwin's 290
Dam, scouring 326
Darning last 228
De Lesseps, Ferdinand 162
Desk, reading 194
Desk signal, Parker's 291
Die and dice box, new 99
Dinotherium, Pikermi 407
Disaster, marine 319
Door latch, Shelly's 66
Door plate, letter box 180
Door stop 217
Drama, elec. aids to 383
Drain for stalls, Logan's 116
Drawing instrument, new 35
Drier, clothes, Cox's 244
Drill, rock 322
Drill, twist, grinder 183
Drilling machinery, rock 54
Drilling tool, Benzie's 19
Driving plant, cable road 39
Drum, heating, Grau's 98
Dynamite cruiser Vesuvius 271
Dynamo, Waterhouse 198

E

Easel, Van Wart's 51
Eclipse of sun on January 1, 1889. 385
Effect, rainbow 390
Electric carriage 215
Electric fuse, experimental 264
Electric light apparatus 310
Electric motor, Baxter 310
Electric motor, Daft 361
Electric plant, Thorenberg 342
Electric shoal water indicator 179
Electrical experiment 264
Electricity, death by, exper. in 393
Elephant, inoculating 169
Elevator for carriages 262
Elevator gate 226
Elevator, grain 95
Endosmometer 55
Endosmosis 41
Engine and crane 102
Engine, cable tramway 279
Engine, express 4
Engine, kerosene-fed 70
Engine, triple compound 134
Engine, winding, 16 h. p. 263
Engines of City of New York 167
Equalizer, draught 194
Equilibrium of liquids 402
Escapement, watch 98
Excelsior, machine to make 275
Exhibition, Glasgow 199
Exosmosis 41
Experiment, Ampere's 999
Experiment, cotton and alcohol. 402

F

Fan and engine, Wing's 116
Favey, gunboat 182
Farm gate 83
Faucet, stop and waste 179
Feed trough, Andrus' 103
Felly clip, new 121
Fence, Fellows' 308
Fence, wire 98
Ferryboat Bergen 351
File case for bills, etc 146
Filter, oil 195
Filter plant, Chattanooga 23
Finger shield, Ahlquist's 180
Fire escape, Block's 131
Fire escape, Santy's 339
Fire extinguisher, Mackey 274
Fire furnace 41
Fireflies, electric 390
Fireplace, Bowie's 217
Float, mason's, Kautz's 258
Flower stand, Spark's 146
Flue Cleaner, Newman's 83
Fly net, Weaver's 244
Foot warmer, Lewis' 61
Fort of the future 246
Forth bridge 86
Foucault's experiment 359
Freezer, Delpy's 258
Friction clutch, cable 39
Frog plate, simple 291
Fruit jar clamp 18
Fumigator, Spitler's 114
Furnace, tire 41
Fuse, electric, experimental 264

G

Galvanometer for projection 386
Gas holder, large 255
Gas lighter, Hogan's 198
Gasstove, Bisbee's 355
Gas wheel 87
Gases, absorption of 41
Gases, diffusion of 55
Gases, weighing 87
Gee, Brood's 306
Gate, end, for wagons 51
Gate, farm 83
Gate for elevators 226
Gate house, aqueduct 79
Gauge, Little's 262
Gear, steering, steam, Turner's 403
Gearing, Kravik's 195
Glasgow exhibition 199
Glyptodon 233
Grain elevator 95
Graphophone 15
Great Eastern, ship 226
Grouse, sand 89
Gun, dynamite, details 399
Gun, dynamite, new 399
Gun, Lebel 259
Gun, remains 406
Guns, torpedo, diverging 390
Gunboat Favey 182

H

Hammer and plane, shingling 84
Hammock, barrel stave 67
Handle for saws 19
Harmonica holder 51
Harrow, Ulsh's 308
Heater, boiler 370
Heater, water 322
Heating drum, Grau's 98
Heating system, Parker's 212
Hoist, slaughter house 66
Hoisting machine, Peters' 98
Hose, garden, spiral 10
Hose rest, Wirt's 146
Hose thimble, Stevens' 115
House, apartment, Brooklyn, N. Y. 387
House, dwelling, cheap 387
House, Royal E 391

I

Illusion, optical 343
Indicator, shoal water 179
Indicator, speed, Fowler's 355
Ingot manipulator 166
Interest indicator 4
Italia, war ship 63

J

Jack, Lander's 291

K

Knife cleaner, Jamieson's 130

L

Ladder, portable exten., Piche's 402
Lamp, incandescent 323
Lamp shade, Michael's 114
Lantern, signal, Peters' 115
Last, darning, Austin's 228
Latch, door, Shelley's 66
Launch, steam 70
Leak stop, marine 18
Leg, artificial 260
Letter box door plate 180
Level, spirit, Hutton's 50
Lighting, new system 147
Lining for cellars 35
Lock-clamp for pipes 131
Lock for valves 35
Lock, safe or vault door, Brown's 386
Lock, sash, Scott's 306
Lock, sash, Wheeler's 242
Lock, seal, for cans 194
Locomotive boiler, Fuller's 310
Locomotive, large 8
Locomotive truck 83
Log, ship's 18
Lucigen 147

M

Machine for rolling car wheels 175
Macronus Kettlewelli 103
Magnet, Sturgeon's 323
Magnetization by spirals 323
Mammoth, Siberian, skeleton 407
Manatee, Florida 278
Manholes for sewers 290
Mantel, Thompson's 195
Microscopical apparatus 281, 291
Mill, fanning, Risser's 243
Mirrors, experiments with 264
Monitor Terror 335
Moon, photograph of 294
Motor, current 82
Motor, Davey's 338
Motor, electric, Baxter 310
Motor, electric, Daft 361
Motor, kerosene fuel 70
Moulding, Reddy's method 260
Movement, mechanical 83, 274

N

Needle and twine-cutter 308
Needle threader, Scherkenbach's 405
Net, fly, Weaver's 244
Net loom, new 22
Newton's second law 41
New York aqueduct 1

O

Offset for sawmill carriages, Rosenberg's 403
Oil can, Coursen's 84
Oil filter 195
Oven, charcoal 198

P

Paddle wheel, Kirsch's 322
Pallet for drying brick 115
Pan, bake, Bicknell's 258
Paper hanging machine 227
Pavilion of Chili 249
Pen and pencil holder, Forster's, 373
Pendulums 359, 377
Perkins, Col. Geo. H 295
Penguin, rock hopper 361
Petroleum steamer, explosion of 323
Photo. busts 166
Phonograph in England 73
Photography, instantaneous 159
Physics, experiments in 25, 41, 55, 87, 119, 185, 323, 359, 377
Pipe, smoking, Wartman's 340
Pipe, tobacco 190
Pipe, tobacco, Roeslaig's 19
Pipes, lock clamp for 131
Planter, check row 227
Polyparium ambulans 137
Pond life, gathering 281
Portraits, photographic 166
Powder, grain, size 406
Powell, Major J. W 103
Pratt Institute 210
Press, punching and forging 82
Propelier, Howell's 84
Propeller, screw, Hodgeman's ... 248
Pug mill, Woodcock's 183
Pulley and sponge, by animals 260
Punch, rail, Holme's 183
Punching machine, Ridley's 354

R

Radiator regulator *162
Raft, timber, great 127
Rail chair, fish plate, etc 290
Rail punch, Holme's 183
Rails, vibrating motions of 71
Railroad tie, Howell's 258
Railway, centifugal 135
Railway, gravity system 143
Railway switch 50
Reamer, Eureka 116
Refishing 273
Reel, hose, Wirt's 146
Reduction of volume by mixture 402
Refrigerating machine 114
Regulator, Waterhouse 198
Rifle, 6 in. cast steel, before trial 406
Rock drill 322
Rock drilling machinery 54
Rose and rose bush, magic 119
Rubber mixer 98
Rule, carpenter's 194
Ruler, parallel 35

S

Saddle, gig, Hitt's 291
Sash lock, Keeler's 242
Sash lock, Scott's 306
Saturn, appearance of 294
Saw handle attachment 19
Saw mill dog 195
Sawing machine, cut off 297
Scaffold bracket 371
Scaffold holder, Blundall's 275
Screw driver, Allard 133
Screw propeller, Hodgeman's 243
Screw tap, Mather's 131
Seal, safety, for checks 35
Seat, bath tub 227
Sewage system, East Orange 307
Sewer manholes 290
Shed, wreck, after explosion 406
Ship Great Eastern 226
Ship of war Italia 63
Ship's log 18
Shoe for car trucks 194
Show case, Kelly's 50
Shutter, camera, Kodak 159
Sibley, Hiram 33
Signaling device for mines 99
Siphon, self-charging 389
Sled brake, Anderson's 306
Sled, Wenzel's 242
Sling, straw, Wood's 388
Slotting machine 354
Specific gravity 25
Speech recorder 15
Speed indicator, Fowler's 355
Spindle, vehicle 163
Spiragraph attachment 35
Square, tailor's 227
Steamer Alphonso XII 371
Steamer Thingvalla 319
Steamer, petroleum, explosion 323
Stone, a great 132
Store service apparatus 180
Stove attachment 216
Stove, car, Wheeler's 50
Stove, gas, Bisbee's 355
Strap, box, wire 146
Straw carrier 339
Switch, railway 50

T

Termite pest 151
Thingvalla, ship 319
Tie, railroad, Howell's 258
Tiger cub, Indian 201
Timber raft, great 127
Times building, new 111
Toboggan slide, marine 47
Toolholder for grindstones 194
Torpedo, Howell 243
Terror, monitor 335
Treadle attachment 370
Tramway, cable 279
Tricycle, Gallagher's 212
Truck, hand, Parker's 306
Truck, locomotive 83
Trunk brace 322
Trunk strap coupling 101
Tunnel, Franco-English 34
Typewriter, Remington 374

U

Uras skeleton 329

V

Valve gear, cut off 180
Valves, nut lock for 35
Vehicle curtain 163
Vehicle spindle 163
Vessels, buoying up 127
Vesuvius, cruiser 271
Viaduct, Garabit, anchorage 403
Viaduct, Garabit, springing of arch 404
Viaduct, Garabit, testing 403
Viper, butting 262
Viper, spectacled 55

W

Wagon body, Tyson's 243
Wagon, dumping, Hewlett's 115
Wagon end gate 51
Walls, heating 212
War ship Italia 63
Watch escapement 98
Water back, the 9
Water heater 322
Water tank and tower 105
Water trap for cisterns 131
Water works, East Orange 307
Wax cells, to make 281
Weather strip, Burcoir's 258
Weather strip, Redman's 83, 146
Wheel, paddle, Kirsch's 322
Wheel, toothed 370
Windmill, Koeppe's 115
Windmill, Soli's 217
Window shade, Castner's 116
Windowstop 217
Wood wool machine 275
Wrench, Gibson's 5
Wrench, Mabrey's 36
Wrench, Slivi's 147
Wrench, White's 242

MISCELLANY.

Figures preceded by a *star* (*) refer to illustrated articles.

A

Absinthe 52
Acid, boracic, as a preservative .. 370
Acid, carbolic, in smallpox 121
Acid, phosphoric 6
Adulteration, legal definition 281
Advertising device *322
Agassiz seaside assembly 101
Air compressor *338
Air cushion, elevator 10
Alaska 258
Alcohol vs. snake poison 395
Alcohol, wood, by fermentation 260
Alloys, silver 181
Alphonso XII., steamer *371
Alum baking powders 282
Aluminum process, Castner's .. 151
Aluminum process, Heroult .. 344
Aluminum process, new 296
Amber 212
Amber varnish, testing 337
America as military school 33
Ammonia, effect on life 10
Amphibian of coal period 401
Anaconda in streets of New York 261
Anacondas, Brazilian 122
Animal exterminator *114
Animals, can they count? 376
Animals, new, Central Park 336
Anthrarobin 392
Annatto, cultivation of 327
Annealing tools 281
Annunciator, electrical *18
Art, white, of Bahamas 324
Articles, small, brassing 389
Ants and butterflies 329
Antelope, dwarf *9
Antelopes, Sing Sing and Gorgon *313
Antiseptics, various, value 377
Anthracite, waste of 209
Apprenticeship, trade, for boys .. 257
Aqueduct, New York *6, *87
Arago experiment *323
Arid regions, reclaiming 54
Artesian wells, Sonoma 99
Artillery, German, changes in 339
Artists, feathered 165
Association, British 25
Astronomical instruments 213
Auger, Richards' *130, *245
Auk, home of the 80
Axle box, new *227
Axle, car, Smith's *290

B

Bake pan, Bicknell's *258
Balance escapement *98
Balloon, hydrogen 231
Balloon trip at night *375
Balloon, vacuum 51
Balloons, naval 85
Balloons, war, naval 69
Ballooning, naval, French 114
Ballooning with natural gas 195
Baltimore, cruiser 229
Band cutter and feeder, Barn's .. *242
Bank punch, London *179
Barometer, a new 64
Barrel, centrifugal *230
Bath, toning 337
Bath, toning, for prints 305
Bath tubs, seat for *227
Bath ing, precautions in 25
Battery, Brewer's *147
Battery plates, carbon *264
Battery Weymersch 98
Batteries, movable, French *358
Batteries, primary 84
Bear, prehistoric *247
Bed brace, Lewis' *371
Bed clothes holder *19
Bed stay, Bethea's *291
Beds of rivers 132
Bee culture 21
Bees, hiving, device for 101
Bellite 340
Bells, large, manufacture 341
Belt rest, Comstock's *226
Bergen, ferry boat *351
Berries, wine from 356
Bicycle attachment *297
Bilboa bridge *191
Biliary secretions 49
Binder, Owen's *258
Birds, artists among 165
Bitumens from sludge acid 193
Black snake, habits of 217
Black snakes, white ring 261, 341
Blast in cupola furnaces 370
Blisters on panels 119
Block for guard rails *5
Blood, circulation in eye 65
Blood, human, diagnosis 292
Blueberry and huckleberry 244
Boat detaching apparatus *66
Boat, petroleum rocket 359
Boat propulsion *195
Boats, electric 290
Boiler covering, insulated *355
Boiler feeder, Winder's *68
Boiler heater *370
Boiler, locomotive, Fuller's *310
Boiler plants, chimneys for 340
Boiler, steam, Hedges' *116
Boilers, eucalyptus for 176
Boilers, grate surface of 132
Boilers, protect the 312
Bolsters, death in 182
Book holder *275
Boots and shoes, old 281
Bosom board, new *228
Bottle papers 153
Bottlers, protection to 3
Boulogne-sur-Mer *150
Brace, trunk *322
Bracket, scaffold *371
Brake, car, new *5
Brake, car, Taylor's *99
Brake lever, Dilger's *5
Brake, marine 33
Brake, sled Anderson's *306
Breakwater, Santa Monica 89
Brick as building material 261
Brick, enameled 199
Bridge Bilboa River *191
Bridge, Brooklyn, railway *31
Bridge, Forth *86
Bridge, Hudson River 34
Bridge, Nebraska City *287
Bridge, railway, at New London, Conn 404
Bridge, Rouen *118
Bridge, St. Louis 86
Bridges and culverts 67
Bridges, low 292
Bridges, street 999
Bridle for brooms *244
Bright's disease 354
British Association 25
Brooms, bridle for *244
Buckthorn in toothache 51, 113
Buffalo, disappearance 233
Butterflies and ants 329
Builders, hints for 328
Burners for lamps 280
Butter, dairy 152
Butter, how to keep 24

C

Cables, wide span 117
Cadet, naval, breaking in 21
Calculating machine, Felt's *265
Calk for horseshoes *98
Camera, Kodak *159
Camera, pocket *231
Camphor carbolate 101
Can opener, Blakeslee's *18
Canal, Panama, machinery 82
Canal, Perekop 3
Canals of Mars 181
Cannon, long range 358
Canvasser, the 152
Car, an iron-clad 130
Car axle, Smith's *290
Car bell, patent 296
Car brake, new *5
Car brake, Taylor's *99
Car coupling, Byrne's *50
Car coupling, Chisholm's *242
Car coupling, Clark's *130
Car coupling, Foster's *290
Car coupling, McKagne's *19
Car coupling, McNab's *67
Car coupling, Weaver's *275
Car, freight *370
Car stop, Walker's *339
Car stove, Wheeler's *50
Carwheels, compressed steel *173
Car wheel, Smith's *290
Cars, American, in England 296
Cars, palace, for hens 168
Cars, railway, heating 359
Cars, stray, how found 217
Cars, street, electric 22, 41, 209
Cars, street, electric storage 361
Carbons 180
Carbon battery plates *264
Carbons, coppered 169
Carriage, electric *215, *269
Carriage road, Pike's Peak 228
Cartridge shell cutter *179
Cash, Chinese 49
Catarrh, remedy for 191
Cedar for paving 343
Cellar, how to cool 24
Cellars, damp 24
Cellars, lining for *35
Celestial world 16, 353
Cement, good 281, 376
Cement, hydraulic, manf. of 401
Centenarians *295
Centering apparatus *312
Chaff, rail, Wilt's *290
Chalcedony Park 184
Chameleon, changes of 120
Char in sugar refining 37
Charcoal in sick room 354
Charcoal oven *198
Charleston, war ship 97
Chelydra, Temminck's *38
Chemists, bungling 256
Chili, pavilion of *249
Chills and fever 4
Chimney, a tall *245
Chimney, tall, engineering 336
Chimney, to build 67
Chimneys for boiler plants 340
Chimpanzee *201
Chimpanzee Crowley, death 201
Chinch bugs and curculio 97
Chinese have no nerves 198
Chinese notions 373
Cholera, chicken 353
Cholera in Sicily 128
Cholera, inoculation for 196
Chromatrope, new *36
Churn, Campbell's *402
Churn, Snyder's *339
Chute, coal, Du Bois' *179
Cider 122
Cistern capacities 376
Cisterns, cylindrical capacity of .. 325
City life, injurious influences of .. 80
City of New York, steamer 135, *167
City of Paris, launch of 314
City, ruined, in Texas 192
City, small, on a block 54
Clamp for fruit jars *18
Clamp, paper hanging *146
Clamp, Tarbell's *66
Clarifying 328
Clausius, Rudolph 228
Cleaning up, fall 209
Cleat for vessels *306
Cleopatra, death of 35
Clock, a large 165
Clocks, one year 222
Cloth, glass 197
Clothes drier *244
Clubs, swinging of *57
Clutch, cable car *133
Clutch, flywheel *355
Clutch for wagon brakes *5
Coal, anthracite, waste 209
Coal chute, Du Bois' *179
Coal, curiosities of 104
Coal mining, Japanese 259
Cobra de Capello *55
Cobra, poisoning by 52
Cocoanut fiber as war material .. 340
Coffee and its effects 308
Coffee, effect of 280
Cohesion *25
Collegians vs. apprentices 276
Collision, another 320
Collision at sea *319
Collision at sea, to avoid 208
Collisions in fogs 401
Collodion process, Eder's 49
Coloring matters, artificial 225
Colors, water, alteration 230
Comb, curry, Blythe's *84
Comet, Barnard's 216
Comet, Barnard-Brooks 181
Comet, Brooks, of 1888 121
Commerce, foreign, English 292
Compass finger ring 242
Compliments to SCIENTIFIC AMERICAN 277
Compressor, air, Davey's *338
Comptometer, Felt's *265
Condiments, adulteration 281
Conscience, human 80
Couvreur, torpedo boat 10
Cooler for ales, Hawkins' *131
Cooper, Eli *153
Copper, electric resistance 17
Corea by native artists *20
Corn cobs as fuel 309
Corn husker, Mehring's *130
Corn, the great American crop .. 136
Cotton seed, transmutation 343
Cotton spinning, English 144
Cough, whooping 245
Cough, whooping, cure 201
Counter attack, mechanism of 96
Coupler, rail, Wilt's *290
Coupling, car, Byrne's *50
Coupling, car, Chisholm's *242
Coupling, car, Cleveland & Dawson's *386
Coupling, car, Clark's *130
Coupling, car, Foster's *290
Coupling, car, McKagne's *19
Coupling, car, McNab's *67
Coupling, trunk strap *101
Coupling, car, Weaver's *275
Court of patent appeals 179, 257
Courts, U. S., decisions of 388
Cow, annual yield of 999
Cow, wild, skeleton of *329
Cows, vegetable 209
Crank rotary motion *274
Creoline 26
Cricket plague in Algeria *135
Cruiser Baltimore 229
Cruiser Shenandoah 373
Cruiser, the fastest 148
Cruiser Vesuvius *271, 358
Cuff holder, Perry's *228
Culverts and bridges 67
Cultivator attachment *130
Curculio and chinch bugs 97
Current regulator, new *198
Curtain bracket *306
Curtain, vehicle *163

D

Dabbing motion, Unwin's *290
Dam, Quaker, proposed 368
Dam, scouring, floating *326
Dam, substantial 328
Darning last, Austin's *228
De Lesseps, Ferdinand *162
Deafness from electric light 233
Death by electricity 368
Death by elect., exper. in *393
Deer in New Zealand 131
Defense, volunteer, naval 320
Desk, reading *194
Desk, signal, Parker's *291
Diabetes 229
Diamonds, electric production 263
Diarrhea, resorcin in 68
Diatoms, collecting 35
Die and dice box *99
Diet of different peoples 58
Diphtheria from cats 377
Diphtheria, lime water in 118
Disaster, marine *319
Discovery and invention 166
Discovery, botanical 289
Diseases, contagious 6
Diseases, zymotic 100
Disinfectant, a good 24
Disinfectant, proposed 212
Doctors should write plainly 229
Dog, a railroad racing 245
Dog, saw mill *195
Dogs that learn trades 400
Door latch, Shelly's *66
Door plate, letter box *180
Door stop *217
Draft equalizer *194
Drama, electrical aids to *383, 390
Drain for stalls *116
Drawbridge, Nebraska City *287
Drawing instrument, new 35
Drawings, duplication of 149
Dredger, a sea-going 10
Dress, swimming, novel 260
Drier, clothes *244
Drill grinder, new *183
Drill, rock, new *322
Drilling tool, improved *19
Drum, heating, Grau's *98
Dry rot, is it contagious? 388
Drying, vacuum 407
Dust, explosion of 369
Dye, seaweed 86
Dynamite cruiser Vesuvius *277
Dynamo telegraphy 274
Dynamo, Waterhouse *198

E

Earthquakes, effects of 247
Easel, Van Wart's *51
Eclipse of the moon 16
Eclipse, total, of moon 101
Eclipse, total, of January 1, 1889. *385
Economy at Panama 118
Eel, fecundity of 343
Eels that scale precipices 403
Electric arc light 192
Electric boats 290
Electric carriage *215
Electric fire engine 289
Electric fuse, experimental *264
Electric gas lighter *198
Electric glass breaker 225
Electric light apparatus *310
Electric light building, new 358
Electric light carbons 180
Electric light convention 128
Electric light decisions 81
Electric light patent 209
Electric lights of fishing nets 40
Electric lighting 52
Electric lighting, cost 372
Electric lighting information 192
Electric motor, Baxter *310
Electric motor, Daft *361
Electric motor service, charges .. 145
Electric phenomena 8
Electric phenomena, peculiar 133
Electric plant Thorenberg *342
Electric prostration 371
Electric railway 231
Electric reduction of ores 133
Electric shoal water indicator *179
Electric storage street cars 361
Electric street cars 41, 209
Electric street railways 166
Electric subway explosions 256
Electric transmission of power 193
Electric welding 65
Electric wire conduit 274
Electric wires, danger from 9
Electric wires in New York 337
Electrical experiment *264
Electrical lighting convention .. 144, 145
Electrical litigation 121
Electrical notes 298
Electricity and plant life 352
Electricity as an employment 260
Electricity, death by 25, 368
Electricity in ore reducing 81
Electricity in the smithy 181
Electricity on elevated roads *361
Electro-motor trial 224
Electro-plating 337
Elephant, inoculating an *169
Elevator air cushion 10
Elevator, carriage *262

© 1888 SCIENTIFIC AMERICAN, INC.

Elevator, grain *95
Emeralds, artificial 119
Emery wheel, dangers of 166, 245
Emmensite 26
Emotion, theatrical 336
Employe? faithful, what is 308
End gate for wagons *51
Endosmometer *55
Endosmosis *41
Energy and vision 405
Engine and crane *102
Engine, express *4
Engine, high speed, Wing's *116
Engine, kerosene *70
Engine, steam, first American 7
Engine, triple compound *134
Engine, winding, 16 h. p *263
Engines of City of New York *167
Engineer, steam, working 405
Engineers, civil, institute 298
Enquiries to be answered 395, 408
Ericsson at 88 80
Escapement for watches *98
Etching acids 184
Etching liquid for steel 177
Eucalyptus for boilers 176
Evaporators, fruit 343
Excavations at Mycenæ 291
Excelsior, machine to make *275
Excitement, does it shorten life? 144
Exhibition, Glasgow *199
Exosmosis *41
Experiments in physics *185
Exposition, floating, new 405
Exposition, Paris, 1889 304

F

Fair, American Institute 97, 225, 240
Faiths and myths, Oriental 104
Fall cleaning up 260
Fan and engine, Wing's *116
Farcy, gun boat *182
Farm, sheep, French 369
Farmer's complaint 4
Fat and lean people, rules for 322
Faucet, stop and waste *179
Feed trough, Andrus' *163
Feet of animals 305
Feet, swollen 66
Felly clips, new *121
Fence, Fellows' *308
Fence, wire *98
Ferry boat Bergen *351
Ferry boat, new type 272
Fever microbe 356
Fever, scarlet 37
Fever, scarlet, poison 99
Fever, ye low 372
Fever, yellow, Florida 68, 128, 160
Fibrin in horse's eye 56
File case for bills, etc *146
Filter for waste oil *195
Filter, smoke 66
Finder, position, Watkin 144
Finger nails, biting 99
Finger shield, Ahlquist's *180
Fire, causes of 272
Fire discipline with rifle 52
Fire engine, electric 289
Fire escape, Block's *131
Fire escapes, Santy's *339
Fire extinguisher, Mackey *274
Fire from iron steam pipes 289
Fires caused by kerosene 164
Fires from steam pipes 313
Fires, self-extinguishment 164
Fireplace, Bewie's *217
Fire crackers 70
Fish plate, Wilt's *290
Fish, volcano 362
Flame, coloration of by elements 305
Flowers, artificial 152
Flax, exotic 7
Flies, how to kill 212
Float, mason's, Knutz's *258
Flour, barrel, made into bread 273
Flour dust, explosion of *290
Flour mill dust, effect of 261
Flour, trade, our foreign 336
Flour yield 21
Flower stand, Stark's *146
Flowers, preservation of 233
Flue cleaner *83
Flume, San Diego 260
Fly net, Weaver's *244
Fly paper, sticky 192
Fly wheel clutch *355
Fogs, London 339
Fogs, preventive of 149
Food adulteration 153
Food and drink, temperature 112
Food preserving 34
Football malady 304
Foot warmer, Lewis' *67
Forests, buried, of New Jersey 265
Forests, influ. on climate 118
Forests of Alaska 388
Fort of the future *246
Forth bridge *86
Fortifications of the future 166
Fossil, gigantic 99
Foucault's experiment *358
Foundations, dampness in 193
Francis, Joseph 177
Frederick, Emp., to Mackenzie 354
Freezer, Delpy's *258
Frieze from Susa *195
Frog plate, simple *291
Fruit, evaporated 129
Fruit evaporators 343
Fruit sirups, preparation 233
Fruits, crystallized 105
Fuel, gas, for locomotives 225
Fuel, petroleum 145
Fuel supply, our 280
Fumigator, Spitler's *114
Funeral, an elephant 120
Fungi, selection of food by 233
Furnace, long run of a 32
Furnace, tire *41
Furnaces, cupola, blast in 370
Furs, cleaning 343
Fuse, electric, experimental *264

G

Galapagos 314
Gas for locomotives 129
Gas fuel for locomotives 225
Gas holder, a large *261
Gas leakage, detection 185
Gas lighter, electric *198
Gas, manufacture of 100
Gas meter specter 247
Gas, natural, ballooning with 195
Gas, natural, results from 230
Gas, new and remarkable 161
Gas pipes, frozen, to thaw 324
Gas poisoning, treatment 357
Gas stove, Bisbee's *355
Gas threads 37
Gas tube, clearing 68
Gas wheel *87
Gas well, Port Huron 80
Gas works in cold climates 326
Gases, compressibility of 328
Gases, diffusion of *41, *55
Gases, noxious, in houses 53
Gases, weighing *87
Gate, Broad's *306
Gate, farm, Baker's *83
Gate for elevators *226
Gauge, Little's *262
Gear, steering, steam, Turner's *403
Gearing, frictional 136
Gearing, Kravik's *195
Gems of the months 102
Gift for industrial education 310
Glasgow Exhibition *199
Glass breaker, electric 225
Glass cloth 197
Glass, ground, to make 10
Glass, pliable 230
Gleanings 168
Globe, a great 51
Gnats, eggs of 129
Gosse, Philip H 160
Grain, clean your 83
Grain, damping 373
Grain elevator *95
Grapes, Chautauqua Co 327
Graphophone *15
Grasshopper traps 85
Grate surface of boilers 132
Great Eastern, end of 197, *226
Grief, cruiser 148
Grinder, twist drill *183
Grouse, sand *89
Guard rails, block for *5
Gulf stream, explorations of 213
Gum, envelope, need of 224
Gum moistener, envelope 280
Gun, dynamite, new *399
Gun, Lebel *259
Gun, steel, bursting of 366
Gun, steel, new, bursting of 401
Gun, torpedo, diverging *390, 392
Gun, 6-inch, new 134
Guns and ships, English 250
Guns, big, risks in firing 276
Guns, cast iron 99
Guns, great 100
Guns, rapid firing, trials of 177
Gunboat Farcy *182

H

Hager, Alber D 193
Hammer and plane, shingling *84
Hammers, five heaviest 327
Hammock, barrel stave *67
Handle for saws *19
Harbor defense 325
Harbor of New York 2
Harmonica holder *51
Harrow, Ulsh's *308
Harvest moon 179
Hasheesh smoker, dreams of 340
Hay, when to cut 21
Heater for boilers *370
Heater, water, new *322
Heating by exhaust steam 80
Heating cars 359
Heating drum, Grau's *98
Hedgehog, serpent killed by 69
Hemlock lumber and bark 169, 197
Hens, palace car for 163
Herreshoffs as ship builders 216
Hoist, slaughter house *66
Hoisting machine, Peters' *68
Home, building a 7
Home industries, Russian 56
Home, summer, selecting 48
Homes for the many *387
Hop, home of the 241
Horse, a $50,000 96
Horse, disparaging 226
Horses, roaring in 7
Horsemanship, Indian 58
Horseshoes, calk for *98
Hose thimble *115
Hose, garden, spiral *10
Hose reel, Wirt's *146
House, Royal E *391
Huckleberry and blueberry 244
Hudson River bridge 84
Hydraulic Power Co 322
Hydrocarbons in nature 198
Hydrochinon 168
Hydrogen for balloons 231
Hydrogen, peroxide of 120
Hydrographic expedition 153
Hydrophobia, treatment 149
Hydroplastic process, Levy's *5
Hydroquinone 113

I

Ice chest, cheap 72
Ice machine, Pictet 178
Ice, manufacturing 105
Ice on Mars 84
Icebergs, North Atlantic 213
Idaho, vanishing streams of 249
Imagination, power of 297
India, hot weather in 162
India, population of 290
India rubber 120
Indians, what they have cost 341
Indicator, shoal water *179
Indicator, speed, Fowler's *355
Industries, American 275
Infants, milk for 196
Infection carried by animals 320
Influenza from pollen 133
Ingot manipulator *166
Ink, action of bleaching agents 122, 228
Ink, blue black 376
Ink, nutgall, new 213
Inoculation for cholera 196
Insane, colored light trials with 208
Insect cloud in New York 181
"Insect life" 102
Insulating material, valuable 84
Insulation? what is the best 176
Insurance in Germany 177
Interest indicator *4
Invention and discovery 166
Inventions, agricultural 11, 42, 59, 74, 90, 106, 123, 138, 170, 202, 234, 266, 282, 299, 330, 362, 394, 408
Inventions, engineering 11, 27, 42, 59, 74, 90, 106, 123, 138, 154, 170, 186, 202, 234, 250, 266, 282, 299, 315, 330, 345, 362, 378, 394, 408
Inventions, miscellaneous 11, 27, 42, 59, 74, 90, 106, 123, 138, 154, 170, 186, 202, 234, 250, 266, 282, 299, 315, 330, 345, 362, 378, 394, 408
Inventor, a successful 355
Inventors' Institute 372
Invest wisely, how to 405
Illusion, optical, curious *343
Iron and steel, mysteries of 85
Iron and steel production 17
Iron, how it rusts 178
Iron melting 309
Iron melting, notes on 241
Iron, pig, cheapest 114
Iron trade, number of men in 37
Irrigation project, Texas 324
Irving, Rd and D 17
Island, dissolving 2
Italia, war ship *63

J

Jack, Lander's *291
Jugs, whistling, Peruvian 304
Jute covers, substitute for 280

K

Keely outdone 69
Kitchen, model 373
Knife cleaner, Jamieson's *130

L

Labor, division of 232
Labrador 232
Lace machine, Jumbo 86
Lacquer for iron and steel 305
Lacquer for iron ships 98
Ladder, portable extension, Piche's *402
Lakes, great, formation of 102
Lamp competition 357
Lamp, incandescent 323
Lamp shade, Michael's *114
Lantern, signal *115
Latch, door, Shelly's *66
Lathe tool, drilling *19
Launch, steam *70
Launch, steam, naval 353
Law, vagaries of 148
Leak stop, Weihe's *18
Leather, colored 215
Lectures for workers 368
Legislation, State 322
Leg, artificial, Gault's *260
Leper settlement, a 200
Letter box door plate *180
Letter delivery, quick 288
Level, spirit, Hutton's *50
Lewis, Henry C 193
Lichens, cultivation 233
Life, long, facts as to 288
Life, storage of 85
Lifeboats, collapsible 225
Light, electric arc 192
Light, electric, patent 200
Light of 7,000,000 candles 293
Light without heat, manufacture 408
Lighting, artificial 292
Lighting by accumulators 400
Lighting, electric 52
Lighting in city and country 121, 149
Lighting, new system *147
Lighting, public, France 52
Lightning, curious doings of 56
Lightning flash 70
Lightning, photograph of 49
Lightning, protection from 116
Lightning rods 67
Lightning rod indicator 121
Line between Peru and Panama 117
Lining for cellars *35
Loan, Panama 38
Lobster shell, reddening of 193
Lobsters in the Pacific 129
Lobsters sent to California 65
Lock-clamp for pipes *131
Lock, door, safe or vault, Brown's *386
Lock, nut, for valves *35
Lock, sash, Keeler's *242
Lock, sash, Scott's *306
Lock, seal, Godwin's *194
Loco weed 233
Loco weed, effect of 293
Locomotive, a large *8
Locomotve boiler, Fuller's *310
Locomotive, express *4
Locomotive, first imported 153, 323
Locomotive, noiseless 163
Locomotive, "Strong," new 389
Locomotive truck *83
Locomotive water scoop 160
Locomotives, gas for 129
Locomotives, gas fuel for 225
Locomotives, shipping of 58
Locomotives, tractive power 264
Log, new form of 7
Log, ship's, Kustel's *18
Logs, a ship of 36
Louisiana, Southern 150
Lucigen *147
Luck, what is it? 309
Lumber, Puget Sound 344
Luxury, growth of 1213

M

Machine, integrating 389
Machine oil 58
Machines, veneering, rotary 393
Machinery in Mexico 25
Macronus Kettlewelli *103
Madness and murder 384
Magnet, Sturgeon's *323
Magnetization by spirals *323
Mahogany for finishing 165
Maine, ship of war 320
Mammals, fossil, gigantic *407
Man, hypnotized, turning robber 101
Manatee, Florida *278
Manholes for sewers *290
Mantel, Thompson's *195
Maple, white and sugar 389
Murder culture 298
Marriage of near kin 369
Mars and Venus 353
Mars, canals of 181
Mars, ice on 84
Mars, markings on 68
Meat, frozen, imports of 88
Meat, preservation of 392
Mechanics, unemployed 32
Medicine, possible revolution in 400
Men, inequalities of 7
Mercury, distillation 54
Mercury, purification of 130, 183
Metals, powdered, solidification 288
Meteor, a remarkable 53
Meteorite, a large 145
Meteorite, Bendego 118
Meteorological notes 273
Metric system 53
Mica, artificial 88
Microbe, fever 356
Microphone, military 33
Microphone, radio 50
Microscopy 56
Microscopical notes *281, *291
Military notes 16, 64
Milk and typhoid fever 384
Milk for infants 196
Milk plants 209
Milk, sterilized 24
Mill, Australian 99
Mill, fanning, Risser's *243
Milling center, New York as 183
Mineral resources of United States 113
Minerals of Utah 216
Mines, ruby 376
Mines, Solida 32
Mines, signaling device for *99
Mining, coal, Japanese 259
Mirrors, experiment with *264
Mississippi, source of 388
Mitchell monument 360
Mobangi River 354
Moisture in houses 228
Monitor Terror *341
Monte Christi 152
Monument, Mitchell 360
Moon, eclipse of 16, 101
Moon harvest 179
Moon, Indians shoot at 113
Moon photograph of *294
Mosquito a blessing 87
Mosquito, against 194
Mosquito defense 304
Mosquito pastilles 58
Mosquitoes, to expel 24
Motion, transmission of *195
Motor, current *82
Motor, Davey's *338
Motor, electric, Daft *361
Motor, kerosene *70
Motor, Mr. Keely's 388
Motors, storage battery 387
Moths attract, by elect. light 96
Moths, buffalo, death to 112, 343
Moths, clouds of 96
Moulding, Beddy's method *260
Movement, mechanical *83, *274
Mummies, Aztec 65
Mummies from Mexico 36
Museums, export 231
Mycenæ, excavations at 291

N

Natural history notes 120, 233, 360
Naturalization, right to 229
Naval maneuvers, British 136
Naval revolution, coming 19
Navies, British and French 200
Navy, our new 248
Navy, work in 153
Navy yard, Mare Island 373
Nebraska City bridge *287
Needle and twine cutter *308
Needle threader, Scherkenbach's *405
Negatives, blocking out 113
Negatives, clearing 196
Negatives, reproduction 405
Nerves and the moods 276
Net, fly, Weaver's *244
Nets, fishing, electric lights of 40
Nets, fishing, manufacture *22
New York, future of 212
New York harbor 2
Newton's second law *41
Nickel plating 5
Notes, miscellaneous 26
Nut lock for valves *35

O

Observatory, Lick, work at *294
Observatory, naval, new 56
Observatory, new 183
Offset mechanism for sawmill carriages, Rosenberg's *403
Ohm, value of 73
Oil can, Coursen's *84
Oil, coal, and natural gas 407
Oil filter, Gallaway's *195
Oil, machine and watch 58
Oil, olive refining 115
Oil on the waters 149
Oil rockets 22
Olive oil, refining 115
Onions, adhesive quality 165
Opium in Florida 10
Optical illusion *343
Ores, low grade, reduction 81, 133
Organ, a paper 10
Organ, large 402
Osmose 103
Oven, charcoal *198

P

Paddlewheel, Kirsch's *322
Panama canal company, failure 385
Paint for tin roof 64
Pallet for drying brick *115
Pan, bake, Bickneil's *258
Panama canal loan 38
Panama canal, machinery 82
Panama rocks 197
Paper hanging machine *227
Paper, straw, in Germany 81
Paper maker, Japanese 184
Paper, manufacture 161
Paper, sensitive, preserving 184
Parachutist, American 231
Parcel post, British 34
Paris, population of 8
Paris, water supply project 123
Passenger traffic, New York 341
Patent appeals, court of 257
Patent decisions, Supreme Court 357
Patent, electric light 200
Patent law in America 321
Patent law, Swiss, new 298
Patent office and the inventor 272
Patent office fund 247
Patent suit, Webster-Higgins 368
Patents for small things 309
Patents, fortunes in 297
Patents, report on 176
Pavilion of Chili *249
Paving, cedar for 343
Peak, highest in the world 389
Pears, Bartlett, spraying 182
Pelicans flying south 247
Penholder, Forster's *373
Pens, a collector of 5
Pendulum, Kater's *359
Pendulums *377
Pendulums, oscillating *359
Penguin, rock hopper *361
People fret too much 304
Pepper, alkaloid in 368
Persiflora Graeca 389
Petroleum in harbor defense 325
Petroleum fuel 145
Petroleum rocket boat 359
Petroleum, solid 24
Petroleum, solidifying 131
Petroleum steamer explosion *323
Perekop canal 3
Perkins, Col. George H *275
Phonograph, an application of 248
Phonograph in England *73, 165
Photo. busts *166
Photo. lithography 184
Photograph of lightning 49
Photography, pyrotechnic 389
Photographs of a great job 104
Photographing, improvement in 69
Photographing interiors 113
Photographic notes 49, 113, 184, 305, 337
Photographic portraits *166
Photography, instantaneous *159
Photography of projectiles 358
Photography on wood 325
Photos., printing in colors 404
Physicians and surgeons, Congress 209
Physics, experiments in *25, *41, *55, *87, *119, *322, *359, *377
Physics, simple experiments in *402
Piles, wharf, creosoting 169
Pipe covering, insulated *355
Pipe, tobacco, new *180
Pipe, tobacco, Roesling's *19
Pipe, sewer, terra cotta 293
Pipe, Wartman's *340
Pipes, delivery of 291
Pipes, gas, frozen, to thaw 324
Pipes, water, wooden 245
Planets, position in August 48
Planets, position of, for December 337
Planets, position in July 2
Planets, position in November 257
Planets, position in October 192
Planets, position for September 129
Plant life and electricity 352
Plant, steel, a great 403
Plants, receptacles of secretion 120
Planter, check row *227
Plates, photographic 72
Plating, electro 337
Plating, nickel 5
Platinotypes, to brown 305
Poison, antagonism of 120
Poison for vermin 343
Poisons, antidotes to 81
Poles, telegraph 116
Polyparium ambulans *137
Poppy as a bank protector 89
Population of India 290
Population of Paris 3
Population, our, 1890 264
Port Arthur 326
Post office dept., expenses for 1890 385
Postal cards, making 309
Postal facilities needed 176
Posts, wooden, treatment 51
Potash, meta-sulphate 120
Poteline 120
Pottery in Limoges 264
Poultry killing, painless 243
Poultry transportation 163
Powell, Major J. W *108
Power, electric transmission 193
Pratt Institute *210
Premiums with sales 273
Press, punching and forging *82
Pressure when distilling 66
Printing, blue 149
Prints, blue, toning 337
Prints faded, restoring 113
Prints, silver, finishing 325
Prison bars, behind the 352
Prisons, Japanese, mfg. in 401
Projectiles, photography of *58
Projectiles, small caliber 273
Propeller blades, copper coated 49
Propeller for pleasure boats 84
Propeller, screw, Hodgeman's *243
Protection to bottlers 3
Pug mill, Woodcock's *183
Punch for bank checks *179
Punch, rail, Hulme's *183
Punching machine, Ridley's *354
Puzzle to an insured man 360

Q

Quail, migratory 353
Quillaya bark in catarrh 191
Quinine, cheap, is it a blessing? 293
Quinine, manufacture of 8

R

Rabbit pest 353
Races, savage, customs of 248
Radiators, regulator for *162
Radio-microphone 50
Radiometer, the 373
Raft, timber *127
Rail chair, Wilt's *290
Rail coupler, Wilt's *290
Rail punch, Hulme's *183
Rails, vibratory motions of *71
Railroad, boat, Columbia River 81
Railroad cars, stray 217
Railroad, Central Pacific 35
Railroad, Mexican National 216
Railroad tie, Howell's *258
Railroad train, fastest 96
Railroad, two foot gauge 36
Railroads, fast time on 196
Railroads, rivers versus 71
Railway, Asiatic, Russian 289
Railway, Brooklyn Bridge *31
Railway, cable, Birmingham *280
Railway catechism 101
Railway, centrifugal *185
Railway, gravity, system *149
Railway lantern, Peters' *115
Railway, mountain electric 231
Railway pass, perpetual 144
Railway, Siberian 132
Railway switch, Boyd's *50
Railway, trains, speed of 3
Railway, Transcaspian 17
Railway, U. S. and Mexico 273
Railway, Westminster 369
Railways, horse 232
Railways, street, electric 166
Raisins, beverage from 356
Ram of the San Francisco 217
Rats, stopper for 72
Re Umberto, ship 344
Reamer, diamond *116
Reducer, negative, safe 49
Redwood, finish for 400
Reel fishing, Dilg's *373
Reel, hose, Wirt's *146
Refrigerating machine *114
Regulator, current, new *198
Regulator for radiators *162
Replies to enquiries 408
Research, scientific 181
Resorcin in diarrhea 68
Restaurants, Chinese 145
Resurrection plant 120
Ribbons for type writers 324
Rich, the haste to be 10
Rifle, British, new 265
Rifle, cast steel, test of *406
Rifles, army, new 137
Ring, finger, compass 242
Rivers, beds of 132
Rivers versus railroads 71
Roads, country, improving 53
Roads, plank, Roman 297
Rock drill, new *322
Rock drilling machinery *54
Rock, excavating 105
Rocks, Panama 197
Rocket, signal, new 314
Rocket, steam 165
Rockets, oil 22
Roof, tin, paint for 64
Rope, good, qualities of 297
Rose bush, magic *119
Rose, magic *119
Rouen bridge *118
Rubber mixer, automatic *98
Ruby mines 376
Rule, carpenter's, Walsh's *194
Ruler, parallel *35
Russia, population of 115
Rust, removal of 208

S

Saccharine, detection 229
Saccharine, improvement in 65
Saccharine, test for 325
Saddle, gig, Hitt's *291
Salida springs and mines 32
Salmon fishing, Puget Sound 306
Salt at Salt Lake 64
Salt, purification of 293
Salt, rock, in nature 198
Salt, to purify 230
San Francisco, ram of 217
Sand paper, waterproof 37
Sand, sonorous 281
Sand storm at sea 114
Sands, Dr. H. B 369
Sans Pareil, ship 100
Saratoga spring, a deep 272
Sash lock, Keeler's *242
Sash lock, Scott's *306
Sassafras, oil of 337
Saturn, appearance of *294
Saw handle attachment *19
Sawing machine, cut off *297
Saw mill dog *195
Scaffold bracket *371
Scaffold holder *275
School, practical work in 360
Science, American Association 16, 128
Science Association, Australian 191
Science, how it advances 18
SCIENTIFIC AMERICAN for 1889 401
Screw driver, Allard *133
Screw ferry boat, Bergen *351
Screw propeller, Hodgeman's *243
Screw top, Mather's *131
Seal lock, Godwin's *194
Seal, safety *35
Seat for bath tubs *227
Seaweed dye 86
Seeds, effect of climate 360
Senses, deceptive 22
Serpent, sea, near view of 249
Serpent, the sea 102
Sewage, aeration of 194
Sewage system, East Orange *307
Sewer pipe, manufacture 293
Sewers, man holes for *290
Sheep farm, French 369
Sheep, feeding 97
Shells, cast steel 117
Shells, experiments with 181
Shenandoah, cruiser 373
Sheridan, Gen. P. H 96
Ship building, California 225
Ship, City of New York 135
Ship, City of Paris 314
Ship Great Eastern 197, *226
Ship of logs 36
Ship of war Charleston 97
Ship of war Italia *63
Ship of war Maine 320
Ship of war Re Umberto 344
Ship Sans Pareil 150
Ship's log *18
Ships and guns, English 259
Ships, fast, wanted 36
Ships, lacquer for 98
Ships, Spanish and Italian *50
Shoe for car trucks *194
Show case, Kelly's *50
Shutter, camera, Kodak *159
Sibley, Hiram *33
Signal, desk, Parker's *291
Signal lantern *115
Signal, rocket, new 314
Signaling device for mines *99
Silk, decomposition of 32
Silver alloys 181
Siphon, snake 280
Siphon, self-charging *389
Sled brake, Anderson's *306
Sled, Wenzel's *242
Sleep, causes and means of 69
Sleeper, what is a? 164
Sleeplessness, treatment 232
Sling, straw, bottom-trip, Brown's *388
Slipping 53
Slotting machine, new *354
Smallpox, carbolic acid in 121
Smoke boxes, short 401
Smoke filter 66
Smugglers, ingenuity of 372
Snake bite and yellow fever 118
Snake poison, alcohol vs 325
Snake siphon 280
Soap, antiseptic 101
Soap bubble diffusiometer 305
Soap from Mount Carmel 9
Society, American Geological 384
Sodium process, Castner's 151
Soundings, deep sea 340
Soprano's voice by express 370
Specific gravity *25
Spectro-telegraph 132
Spectrum of "R" Cygnis 169
Speech, reproduction of *15
Speech, whistling 17
Speed, high, in thick weather 49
Speed of trains, limit 249
Speed indicator, Fowler's *355
Spider poisons 310
Spider's nest, trap door 163
Spider's thread, size of 213
Spindle, vehicle, Moore's *163
Springs, boiling, dangers of 306
Springs, Salida 32
Square, tailor's *227
Stain for dark-room windows 17
Stars, fixed, diameter of 68
Stars, number of 232
Steel and iron, mysteries of 85
Steel and iron production 17
Steel casting process, new 88
Steam boiler, Hedge's *116
Steam detrimental in sewers 325
Steam engine, first American 7
Steam jackets, high pressure 3
Steam jet phenomena 372
Steam jets, and prod. combust 312
Steam launch, economical *70
Steam launch, novel 353
Steam rocket 165
Steamer Alphonso XII *371
Steamer City of New York *167
Steamer, paddle, conversion 259
Steamer, petroleum, explosion *323
Steamers, Atlantic, engines 168
Steamers for New York trade 5
Steamers, ocean, collision 112
Steamship line, new 117
Stevenson, James 193
Stone, a great *343
Stone, etching on 184
Stone, induration of 196
Stones, aluminous, precious 69
Store service carrier *180
Storm, August, great 128
Stove attachment *216
Stove, car, Wheeler's *50
Stove, gas, Bisbee's *355
Stove polish 65
Stranahan, James S. T 392
Strap, box, wire *146
Straw carrier *339
Street bridges 289
Streets, American 6
Subway, electric, explosions 256
Subways, New York 161
Subways, Philadelphia 224
Sugar machinery 51
Sugar prospects on the Pacific 101
Sugar refining, char. in 37
Sun, photographing 68
Swimming dress, novel 260
Swine, healthy, how to have 337
Switch, railway, Boyd's *50
Symbiosis of alga and sponge 360
System, underground, Brooks, in Brooklyn 407

T

Tangent, largest in the world 69
Tapestry, old, recovery of 257
Tarpon or silver king 113
Tea, Labrador 85
Tea, new constituent 88
Telegraph poles 116
Telegraph, spectro 132
Telegraph wires and water pipes 69
Telegraphing by the clouds 2
Telegraphy, dynamo 274
Telephone, Bell, decision 321
Telephone convention 160, 161
Telephone on submarine cables 97
Telephoning, long distance 275
Telescope, 1,000,000 dollar 312
Terminus, largest 152
Termite pest *151
Terror, monitor *341
Theater, underground travel to 257
Thingvalla, steam ship *319
Thiophosphoryl chloride 161
Thorenberg electric plant *342
Threads, gas tap 37
Thunder, sound of 201
Thunder storms 296
Tie, railroad, Howell's *258
Tiger cub from India *201
Tiger, how it kills and eats 277
Timepieces, brief history of 40
Times building, new *117
Tin, American 82
Tin roof, paint for 64
Tins, old, utilization of 257
Tinning, improved process 8
Tire furnace *41
Toad, a venerable 314
Toad in solid coal 273
Tobacco and bacteria 296
Tobacco pipe, new *180
Tobacco pipe, Roebling's *19
Toboggan slide, marine *53
Toning solution for prints 49
Tool holder for grindstones *194
Tools, annealing 281
Tools, do they grow tired? 212
Tools, keeping 213
Toothache, buckthorn in 51, 113
Tooth, deficiency, inherited 230
Toothpicks, wooden 168
Torpedo and other fast ships 320
Torpedo boat (ouvreur 10
Torpedo boats, French, new 112
Torpedo boat, new 311
Torpedo boat Vesuvius 358
Torpedo, Howell *248
Torpedo, new, trial of 263
Torpedo warfare 96
Town, coolest in the world 119
Traces, elastic 292
Trade apprenticeship for boys 257
Trade, good, to learn 393
Trade mark case 104
Trade mark decision 88
Train, fast, record 281
Train, fastest in world 96
Trains, American, fast 196
Trains, fast 3, 148, 197, 229
Trains, speed, limit of 249
Trains, speed of 4, 81
Trains, passenger, speed 148
Trains, vestibule 8
Transcaspian railway 17
Transit, rapid, gravity system *149
Treadle attachment *370
Trees, autumn work among 329
Trees, Central Park 53
Trees, Christmas 404
Trees in Washington 89
Trees, medicating 297, 353
Trempealeau, ... *408
Trenails, ... 168
Trenching machine *83
Trees, Canadian 81
Trevethick, Richard 17
Tricycle, Gallagher's *212
Truck, hand, Parker's *306
Truck, locomotive *83
Trunk strap coupling *101
Trunk brace, new *322
Tunnel, Franco-English *34
Tunnel, St. Clair, new 402
Tunnels, remarkable 63
Tuson, Prof. R. V 337
Typewriter, Remington *374
Typewriter ribbons 324

U

Urus, skeleton *329
Urine, composition of 280

V

Vaccination 292
Vaccination in the harem 9
Valve gear, cut off *180
Valve, safety, fastening 308
Valves, nut lock for *35
Varnish, amber, testing 337
Varnish, wrinkle about 114
Vehicle curtain *163
Vehicle spindle *163
Veneering frame houses 296
Venus and Mars 353
Vermin poison 343
Vessels, buoying *137
Vessels, harbor defense 105
Vessels, leaks in *18
Vesuvius, cruiser 277
Vesuvius, torpedo boat 358
Viaduct, ... *408
Village destroyed by ice 136
Vinegar, a well of 67
Viper, butting *262
Viper, spectacled *55
Volapuk 288

W

Wages in Scotland 84
Wagon body, Tyson's 243
Wagon, dumping *115
Wagonend-gate *51
Walls, system of heating *212
Walnut, black 341
War balloons, naval 69, 85
War ship Charleston 97
War ship Italia *63
War ship Maine 320
War ship Re Umberto 344
War with creeping things 215
Wares, American, in Austria 24
Waste in the workshop 353
Watch escapement *98
Watches, good, R. R. people must carry 392
Watch oil 58
Watches, rock crystal 49
Water buck, the 9
Water, evap., latent heat 121
Water heater, new *322
Water level indicator 116

ROSE'S GREAT TREATISE ON STEAM ENGINES.

RECENTLY PUBLISHED.

Modern Steam Engines.

An elementary treatise upon the Steam Engine, written in plain language, for use in the workshop as well as in the drawing office; giving full explanations of the construction of modern Steam Engines including diagrams showing their actual operation; together with complete but simple explanations of the operations of various kinds of valves, valve motions, link motions, etc., thereby enabling the ordinary engineer to clearly understand the principles involved in their construction and use, and to plot out their movements upon the drawing board. By Joshua Rose, M. E. Illustrated by 422 engravings. In one volume, quarto, 321 pages.

Price $6.00, *free of postage to any address in the world.*

BY THE SAME AUTHOR.

Mechanical Drawing Self-Taught. Comprising Instructions in the Selection and Preparation of Drawing Instruments. Elementary Instruction in Practical Mechanical Drawing; together with Examples in Simple Geometry and Elementary Mechanism, including Screw Threads, Gear Wheels, Mechanical Motions, Engines and Boilers. By Joshua Rose, M. E. Illustrated by 330 engravings. 8vo.....$4.00

The Complete Practical Machinist. Embracing Lathe Work, Vise Work, Drills and Drilling, Taps and Dies, Hardening and Tempering, the Making and Use of Tools, Tool Grinding, Marking out Work, etc. By Joshua Rose, M. E. Illustrated by 356 engravings. Fifteenth Edition, thoroughly revised and in great part rewritten. 12mo, 439 pages.....$2.50

The Slide Valve Practically Explained. Embracing Simple and Complete Practical Demonstrations of the Operation of each element in a Slide Valve Movement. By Joshua Rose, M. E. Illustrated by 35 engravings. 12mo.....$1.00

Steam Boilers. A Practical Treatise on Boiler Construction and Examination. For the use of Practical Boiler Makers, Boiler Users, and Inspectors; and embracing in plain figures all the Calculations necessary in Designing and Classifying Steam Boilers. By Joshua Rose, M. E. Illustrated by 73 engravings. 8vo. 250 pages.....$2.50

☞ *Illustrated circulars, giving the full table of contents of all the above works, sent free to any one who will apply.*

☞ *The above or any of our Books sent by mail, free of postage, at the publication prices, to any address in the world.*

☞ *Our new revised Descriptive Catalogue of Practical and Scientific Books 84 pages, 8vo, and our Catalogue of Books on Steam and the Steam Engine, Mechanics, Machinery, and Dynamical Engineering, and other Catalogues, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.*

HENRY CAREY BAIRD & CO.,
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS
810 Walnut St., Philadelphia, Pa., U. S. A.

THE POPULAR SCIENCE MONTHLY.

Edited by W. J. Youmans.

Well known as a trustworthy medium for the spread of scientific truth in popular form, is filled with articles of interest to everybody, by the ablest writers of the time. Its range of topics, which is widening with the advance of science, includes—

SOCIAL AND DOMESTIC ECONOMY.
POLITICAL SCIENCE, OR THE CONDUCT OF GOVERNMENT.
SCIENTIFIC ETHICS;
MENTAL SCIENCE AND EDUCATION
MAN'S ORIGIN, SCIENCE AND RELIGION.
PREVENTION OF DISEASE, AND IMPROVEMENT OF THE RACE.
AGRICULTURE AND FOOD PRODUCTS.
THE INDUSTRIAL ARTS.
NATURAL HISTORY;
DISCOVERY, EXPLORATION, ETC.

With other illustrations, each number contains a finely engraved **Portrait** of some eminent scientist, with a **Biographical Sketch.**

Among its recent contributors are: Herbert Spencer, Andrew D. White, David A. Wells, T. H. Huxley, Sir John Lubbock, Edward Atkinson, W. K. Brooks, Grant Allen, E. D. Cope, Thomas Hill, David Starr Jordan, Joseph Le Conte, Appleton Morgan, Felix L. Oswald, Sir William Dawson, F. W. Clarke, Horatio Hale, Edward S. Morse, J. S. Newberry, Eugene L. Richards, N. S. Shaler, D. G. Thompson.

Single Number, 50c. Yearly Subscription, $5.
D. APPLETON & COMPANY,
1, 3, and 5 Bond Street, New York.

MECHANICAL DRAWING.

By Prof. C. W. MacCord, of the Stevens Institute of Technology. A series of new, original, and practical lessons in mechanical drawing, accompanied by carefully prepared examples for practice, with directions, all of simple and plain character, intended to enable any person, young or old, skilled or unskilled, to acquire the art of drawing. No expensive instruments are involved. Any person with slate or paper may rapidly learn. The series embodies the most abundant illustrations for all descriptions of drawing, and forms the most valuable treatise upon the subject ever published, as well as the cheapest. The series is illustrated by upward of 450 special engravings, and forms a large quarto book of over one hundred pages, uniform in size with the SCIENTIFIC AMERICAN. Price, stitched in paper, $2.50; bound in handsome stiff covers, $3.50. Sent by mail to any address on receipt of price.

For the convenience of those who do not wish to purchase the entire series at once, we would state that these valuable lessons in mechanical drawing may also be had in the separate numbers of SUPPLEMENT, at ten cents each. By ordering one or more numbers at a time, the learner in drawing may supply himself with fresh instructions as fast as his practice requires. These lessons are published successively in *1, *3, *4, *6, *8, *9, *12, *14, *16, *18, *20, *22, *24, *26, *28, *30, *32, *36, *37, *38, *39, *40, *41, *42, *43, *44, *45, *46, *47, *48, *49, *50, *51, *52, *53, *54, *56, *58, *60, *62, *65, *69, *74, *78, *84, *91, *94, *100, *101, *103, *104, *105, *106, *107, *108, *134, *141, *174, *176, *178.

FOR SALE BY
MUNN & CO.,
Publishers of SCIENTIFIC AMERICAN,
361 Broadway, New York.

DEAFNESS and Noises in HEAD Entirely Cured by Peck's Patent Improved Tubular Ear Cushions. Whispers heard distinctly. Unseen, comfortable, self-adjusting. *Successful when all remedies fail.* Sold only by F. HISCOX, 853 Broadway, cor. 14th St., N.Y. Write or call for illustrated book of proofs FREE.



THE BACKUS MOTOR
Is the cheapest power known for driving all kinds of light machinery. Thousands in use the world over. Speak for themselves. Sold with or without a governor. It is noiseless, neat, compact, and runs without attention

THE BACKUS EXHAUSTER
A wonderful Air Mover. Invaluable for ventilating factories and public buildings. Will remove smoke, dust, steam, foul air, acids, and is used for drying, heating or cooling. ☞ *Send for Special Catalogue.*
BACKUS WATER MOTOR CO., Newark, N.J.

50 CENTS.

THE WORLD IS FULL OF "SMART ALECKS"
Who fool themselves with ease. They know **too much.** What about knives? Take the knife shown here now. If blades were hoop iron, 50 cents would be cheap for it. But blades are of the highest quality razor steel. Every blade is file tested and **Known to be good** before sending out. It is cheap for a silver dollar, but our price is **50c.,** postpaid, 5 for $2. Send for our 64-page free list, also "How to Use a Razor."
Maher & Grosh
40 Summit St.,
Toledo, Ohio.

SWISS PATENTS
E. IMER-SCHNEIDER, Solicitor,
GENEVA, SWITZERLAND.

Put an Electric Bell in your house or shop.
You can do it yourself with our Complete Outfit. Price $2 50
Outfit consists of 1 Electric Bell, 1 Battery, 1 Push Button, 100 feet Wire, and Staples for Wire.
C. E. JONES & BRO.,
***55 & 57 Longworth,* CINCINNATI, O.**
It is important to us that you mention this paper.

PULLEYS. Cheapest, Lightest, and Best. Made by Hardwood Split P. Co., Menasha, Wis.

CHICAGO HOROLOGICAL INSTITUTE
175 Dearborn Street, Chicago, Ill.
Established for giving **Practical and Technical Instruction in Watchmaking.** Students can enter this School at any time. Send for circular giving terms and full information.

2nd MACHINERY Lists Sent.
N. Y. Mach'y Depot, Bridge Store 16, Frankfort St., N.Y.

MAGIC LANTERNS
AND STEREOPTICONS ALL PRICES.
VIEWS ILLUSTRATING EVERY SUBJECT FOR PUBLIC EXHIBITIONS
SPLENDID BUSINESS FOR A MAN WITH SMALL CAPITAL ALSO FOR HOME AMUSEMENTS
L. M. PRINCE
148 W. 4TH ST.
CINCINNATI, O.
SEND 10¢ FOR CATALOGUE

GRAINING. Patented Perforated Metallic Graining Plates. For imitating all kinds of wood in a rapid and easy manner. Shipping and Business Stencils and Art Metal Work. Metal FRESCOING Plates. Send stamp for Catalogue.
J. J. CALLOW, CLEVELAND, OHIO.

AIR BRUSH.

Applies liquid color by a jet of air. Gold, silver, and special medals of Franklin and American Institutes. *Saves 75 per cent. of time in shading technical drawings.* The crayon, ink, or water color portrait artist finds his labor lessened, his pictures improved, and his profits increased by using the Air Brush. Write for illustrated pamphlet. It tells how to earn a living.
Air Brush Mfg. Co., 67 Nassau St., Rockford, Ill.

MADE WITH BOILING WATER.
EPPS'S
GRATEFUL—COMFORTING
COCOA
MADE WITH BOILING MILK.

CLARK'S NOISELESS RUBBER WHEELS
No More Splintered Floors.
Different Styles. Catalogue Free.
Geo. P. Clark, Box L. **Windsor Locks, Ct.**

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **59.** Price 10 cents. To be had at this office and of all newsdealers.

$10.00 to $50.00 per night. A light and profitable business. **Magic Lanterns and Views** of popular subjects. Catalogues on application. Part 1 Optical, 2 Mathematical, 3 Meteorological, 4 Magic Lanterns, etc.
L. MANASSE, 88 Madison Street, Chicago, Ill.

PETROLEUM BOAT. DESCRIPTION of a petroleum motor devised by Mr. Lenoir for the propulsion of small boats. With 2 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **637.** Price 10 cents. To be had at this office and from all newsdealers.

THE THROOP PERFORATING CO.,
Terrace Square Buffalo N. Y.
PERFORATED METALS
WRITE FOR PRICES.



"THE GREAT MONTHLY MAGAZINE OF THE WORLD."
(Pacific Churchman.)

THE CENTURY MAGAZINE IN 1889.

An Exile to Siberia.

WHY has it such an enormous circulation? Experts estimate that between two and three millions of people read each number of THE CENTURY.

BECAUSE THE CENTURY is above everything a leader. It led the development of wood-engraving in America. It has fostered the development of American authors. It is alive to the issues of to-day. What it prints, sets people to thinking and talking.

BECAUSE whatever other periodicals may come into the family, the great reading world has found out that "no household can keep abreast of the times without THE CENTURY." It has been said, "Its success is explained by its contents."

BECAUSE the greatest writers of the world like to have their work read by the greatest number, and therefore to such a magazine as THE CENTURY the best naturally comes. It was for THE CENTURY that Gen. Grant first wrote his reminiscences of important battles; it was for it that the leaders on both sides in the Civil War have been writing the famous "War Papers."

BECAUSE it is publishing the Life of Abraham Lincoln, by his private secretaries. Of this it has been said, "The young man who is not reading it robs himself of that which he will one day hunger for," and again, "The person who does not read it will be considered unintelligent; it is classic." The coming year presents the most important part of this great history, which may be begun at any time.



BECAUSE THE CENTURY is printing those remarkable articles on "Siberia and the Exile System" by George Kennan, which are attracting universal attention and are being reprinted in hundreds of foreign newspapers, but are not allowed to enter Russia. The "Chicago Tribune" says that "no other magazine articles printed in the English language just now touch upon a subject which so vitally interests all thoughtful people in Europe and America and Asia." They are "as judicial as the opinion of a Supreme Court tribunal,—as thrilling as the most sensational drama."

BECAUSE—but we have not space here to announce the new features of THE CENTURY for 1889. Any person, mentioning this paper, can have the prospectus, with our "Catalogue of Special Publications" (with original illustrations), mailed **FREE** of charge. This advertisement will not appear again.

Address, **THE CENTURY CO.**
33 East 17th St. New-York.

The subscription price of THE CENTURY is $4.00 a year,—35c. a number. All dealers and postmasters take subscriptions, or you can remit directly to the publishers. Begin with November.

Proposals for Machines and Tools for the Navy Yard, Mare Island, California.—NAVY DEPARTMENT, WASHINGTON, D. C., *November* 7, 1888. Sealed proposals will be received at this Department until 12 o'clock noon, on Thursday, the 27th day of December, 1888, at which time and place they will be opened in the presence of attending bidders, for furnishing machines and tools required by the Bureau of Construction and Repair, and for the delivery of the same at such place in the Navy Yard, Mare Island, California, as the Commandant of that Yard may direct. Printed schedules particularly describing the machines and tools, blank forms on which proposals must be made, and all other information essential to bidders can be obtained by regular dealers in, or manufacturers of, the articles required, on application to the Commandant of said Navy Yard, or to the Chief of the Bureau of Construction and Repair, Navy Department. Proposals must be made in duplicate, and enclosed in sealed envelopes marked "Proposals for Machines and Tools for the Navy Yard, Mare Island, California," and addressed to the Secretary of the Navy, Navy Department, Washington, D. C. All proposals must be accompanied by either plans or descriptive cuts of all the machines and tools which the bidder offers to furnish. The Secretary of the Navy reserves the right to reject any or all bids, in whole or in part, as, in his judgment, the interests of the Government may require.

D. B. HARMONY, *Acting Secretary of the Navy.*

Proposals for Materials required for use in the Construction of the U. S. Monitor "Monadnock."—NAVY DEPARTMENT, Washington, *December* 12, 1888. Sealed proposals, in duplicate, will be received at this Department until 12 o'clock noon, on Wednesday, the 23d day of January, 1889, at which time and place they will be opened in the presence of attending bidders, for furnishing the materials required, under the Bureau of Construction and Repair, for use in the construction of said Monitor, and for the delivery of the same at such place or places within the Navy Yard, Mare Island, Cal., as the Commandant of that Yard may direct. Printed schedules of the materials required, arranged in classes and particularly described, blank forms on which proposals must be made, and all other information essential to bidders, can be obtained by regular dealers in, or manufacturers of, the materials required, on application to the Commandant of said Navy Yard, or to the Chief of the Bureau of Construction and Repair, Navy Department. Proposals may be made for one or more of the classes as designated in the schedule, but no bid for a portion of any class will be considered. Proposals must be inclosed in sealed envelopes marked "Proposals for Materials for the U. S. Monitor 'Monadnock.'" and addressed to the Secretary of the Navy, Navy Department, Washington, D. C. The Secretary of the Navy reserves the right to waive defects in form and to reject any or all bids, as in his judgment the interests of the Government may require.

WILLIAM C. WHITNEY, *Secretary of the Navy.*

ARCHITECTURAL BOOKS.

Useful, Beautiful, and Cheap.

To any person about to erect a dwelling house or stable, either in the country or city, or any builder wishing to examine the latest and best plans for a church, school house, club house, or any other public building of high or low cost, should procure a complete set of the ARCHITECTS' AND BUILDERS' EDITION of the SCIENTIFIC AMERICAN.

The information these volumes contain renders the work almost indispensable to the architect and builder, and to persons about to build for themselves they will find the work suggestive and most useful. They contain colored plates of the elevation, plan, and detail drawings of almost every class of building, with specification and approximate cost.

Four bound volumes are now ready and may be obtained, by mail, direct from the publishers or from any newsdealer. Price, $20.00 a volume. Stitched in paper covers. Subscription price, per annum, $2.50. Address and remit to

MUNN & CO., Publishers,
361 Broadway, New York.

VALUABLE PATENT BOOKS FOR SALE.

Specifications and Drawings of **Patents Granted by the United States from 1871 to 1886,** inclusive. Complete set. 232 volumes.

Specifications and Drawings of **Electrical Patents from 1871 to 1887,** inclusive. Complete set.

Patent Office Reports, 1847 to 1871, inclusive. 56 volumes.....$35.00

Patent Office Gazette, 1872 to 1887, inclusive. Complete set in full sheep binding. 57 volumes, including Indexes.....$165.00

General Subject Index of Patents, 1790 to 1873. 3 volumes.....$7.50

Fisher's Patent Cases. 6 volumes.....$125.00

Robb's Patent Cases. 2 volumes.....$15.00

Federal Reporter. Vols. 16 to 33 inclusive..$50.00

Address **W. H. LOWDERMILK & CO.,**
New and Second-Hand Booksellers,
1424 F Street, Washington, D. C.

New Patent For Sale.—Inventor wishes to sell patent on a new agricultural machine (potato planter). Send offers to C. W. Freyer, care Henry Sturm, Trinidad, Col.

PERFECT NEWSPAPER FILE

The Koch Patent File, for preserving newspapers, Magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of $1.50 by mail, or $1.25 at the office of this paper. Heavy board sides; inscription "SCIENTIFIC AMERICAN," in gilt. Necessary for every one who wishes to preserve the paper. Address

MUNN & CO., Publishers SCIENTIFIC AMERICAN.

The Scientific American

PUBLICATIONS FOR 1889.

The prices of the different publications in the United States, Canada, and Mexico are as follows:

RATES BY MAIL.

The Scientific American (weekly), one year	$3.00
The Scientific American Supplement (weekly), one year	5.00
The Scientific American, Export Edition (monthly) one year	5.00
The Scientific American, Architects and Builders Edition (monthly), one year	2.50

COMBINED RATES.

The Scientific American and Supplement	$7.00
The Scientific American and Architects and Builders Edition	5.00
The Scientific American, Supplement, and Architects and Builders Edition	9.00

Proportionate Rates for Six Months.

This includes postage, which we pay. Remit by postal or express money order, or draft to order of

MUNN & CO., 361 Broadway, New York.

Dyke's Beard Elixir forces heavy moustache, full beard and hair on bald heads in 28 days. 3 or 4 Pkgs. do this. We prove it or pay $100. We mail any 2 of 4 Pkgs. for 50c Just half price. Smith Mfg. Co., Palatine, Ills.

© 1888 SCIENTIFIC AMERICAN, INC.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.



This Hack Saw Frame will hold blades of all lengths from 2 to 12 inches. By using the extra clamp, as seen in the cut, it will hold and use up all the broken pieces of blades, thus saving the cost of frame in a short time. It is by far the most substantial and best finished frame in market. Price of frame, $1. Clamp, 10 cents. Postage, 25 cents. Sent by mail on receipt of $1.35; or may be bought at the hardware stores.

MILLERS FALLS CO.,
93 Reade Street, New York.

THE KODAK CAMERA



Makes 100 Instantaneous Pictures by simply pressing a button. Anybody can use it who can wind a watch. No focusing. No tripod. Rapid Rectilinear Lens. Photographs moving objects. Can be used indoors.

Division of Labor—Operator can finish his own pictures, or send them to the factory to be finished.

Morocco covered Camera, in handsome sole-leather case, loaded for 100 pictures,

For full description of "Kodak" see SCI. AM., Sept. 15, '88.
Price, $25.00. Reloading, $2.00.

The Eastman Dry Plate & Film Co.
Rochester, N. Y. 115 Oxford St., London.
Send for copy of Kodak Primer with Kodak Photograph.

Principal Pacific Coast KODAK Agency,
SAM C. PARTRIDGE, 529 Commercial St., San Francisco.



LUNKENHEIMER'S
GLASS BODY
OIL PUMP

A Reliable Auxiliary to a Sight Feed Lubricator.

Cincinnati Brass Works,
CINCINNATI, OHIO.

THE COPYING PAD.—HOW TO MAKE and how to use; with an engraving. Practical directions how to prepare the gelatine pad, and also the aniline ink by which the copies are made; how to apply the written letter to the pad; how to take off copies of the letter. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **438.** Price 10 cents. For sale at this office and by all newsdealers in all parts of the country.

STEEL BALLS.



For Anti-Friction Bearings, of Best Cast Steel. Hardened, Ground, and Burnished, from 3-16 in. to 2 in. diameter.

In quality and density of metal, in uniformity of temper, and in accuracy and nicety of finish warranted unequaled.

☞ *Samples and prices on application.*

Simond's Rolling-Machine Co., Fitchburg, Mass.

THE MODERN ICE YACHT. — BY Geo. W. Polk. A new and valuable paper, containing full practical directions and specifications for the construction of the fastest and best kinds of Ice Yachts of the latest, most approved forms. Illustrated with engravings drawn to scale, showing the form, position, and arrangement of all the parts. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **624.** Price 10 cents. To be had at this office and of all newsdealers.

WIRE ROPE

Address JOHN A. ROEBLING'S SONS, Manufacturers, Trenton, N. J., or 117 Liberty Street, New York.

Wheels and Rope for conveying power long distances. Send for circular.

INVENTORS and others desiring new articles manufactured and introduced, address P. O. Box 86, Cleveland, O.

GUILD & GARRISON
BROOKLYN, N. Y., U. S. A.

Builders of **Steam Pumps** for Liquids or Semi-liquids. High Grade **Vacuum Pumps, Filter Press Pumps, Air Compressors, Acid Blowers, Feed Pumps, Agitators, Condensers** for **Pans, Engines, Steam Pumps, Vacuum Apparatus, etc.**

MALLEABLE AND FINE GRAY IRON ALSO STEEL CASTINGS FROM SPECIAL PATTERNS
THOMAS DEVLIN & CO. FINE TINNING JAPANNING AND FINISHING
LEHIGH AVE. & AMERICAN ST. PHILA.

PATENTS.

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had *forty-one years experience*, and now have *unequaled facilities* for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business intrusted to them is done with special care and promptness, on very reasonable terms.

A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases, Hints on the Sale of Patents, etc.

We also send, *free of charge*, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world.

MUNN & CO., Solicitors of Patents,
361 Broadway, New York.

BRANCH OFFICES.—No. 622 and 624 F Street, Patic Building, near 7th Street, Washington, D. C.

THE CONTINENTAL IRON WORKS,
BROOKLYN, N. Y.,
SOLE MANUFACTURERS OF

CORRUGATED BOILER FLUES

Under their own patents and those of SAMSON FOX of Leeds, England.
MADE IN ALL SIZES, WITH FLANGED OR PLAIN ENDS.
☞ Take Ferry from 10th or 23d St., N. Y., to Greenpoint. ☜

25% TO 50% SAVING — **THE MACKEY AUTOMATIC SPRINKLER**
Thermostatic Fire Alarm operated by Electricity.
Positive in its action. Easily tested. No attendance required. Endorsed by Underwriters. **The J. C. Mackey Co.,** 76-80 So. Water St., Syracuse, N. Y., U. S. A.

DELAFIELD'S PAT. SAW CLAMP

With saw for cutting metals. Saves all the broken hack-saw blades. In use over two years in all parts of the country. The new clamps have the edges bevelled that hold the saw. By mail, with one blade, 50 cents. Extra blades 8½" x ½", "Star," 7 cents each, 70 cents per dozen, by mail. Blades 8" x 1", "Stubs," 35 cents each, by mail. Discount to dealers.

NOROTON MFG. WORKS, Noroton, Conn.

Use Adamant Wall Plaster

—IT IS—
Hard, Dense & Adhesive
—DOES NOT—
CHECK or CRACK.

It is impervious to wind, water, and disease germs. It dries in a few hours. It can be applied in any kind of weather. It is in general use. Licenses granted for the mixing, using, and selling. Address,

ADAMANT MFG. CO. 71 E. GENESEE STREET. Syracuse, N. Y.

WATCHMAKERS
Send for REDUCED PRICE LIST of Whitcomb Lathes, date of July 1, 1888. American Watch Tool Co., Waltham, Mass.

PANAMA CANAL, WORK ON THE.—An elaborate paper on the present status of the work on this important engineering enterprise, with a description of the proposed provisional lock canal, with 9 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **636.** Price 10 cents. To be had at this office and from all newsdealers.

The Original Unvulcanized Packing.

CALLED THE STANDARD—As it is the Packing by which all others are compared.

Accept no packing as JENKINS PACKING unless stamped with our "Trade Mark."

JENKINS BROS. { **71 John Street, N. Y.**
105 Milk Street, Boston.
21 North 5th St., Phila.
54 Dearborn St., Chicago.

THE NEW NON-CONDUCTOR.
ASBESTIC-SPONGE.
Sectional Pipe Coverings,
ASBESTOS BOILER COVERINGS,
H. W. Johns Manufacturing Co.

SOLE MANUFACTURERS OF
H. W. Johns' Asbestos Roofing, Building Felts, Fire-Proof Paints, Liquid Paints, etc.
87 Maiden Lane, New York. CHICAGO. PHILADELPHIA. LONDON.

Barnes' Patent Foot Power Machinery.

WORKERS OF WOOD OR METAL,

without steam power, by using outfits of these Machines, can bid lower, and save more money from their jobs, than by any other means for doing their work. Also for

Industrial Schools or Home Training.

With them boys can acquire practical journeymen's trades before they "go for themselves." Price-List Catalogue Free.

W. F. & JOHN BARNES CO.,
No. 1999 Ruby St., Rockford, Ill.

THE AMERICAN BELL TELEPHONE CO.
95 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

ERIE ENGINE WORKS WALNUT STREET ERIE PA MANUFACTURERS OF STATIONARY-PORTABLE-AGRICULTURAL-ENGINES STATIONARY-PORTABLE-VERTICAL-BOILERS

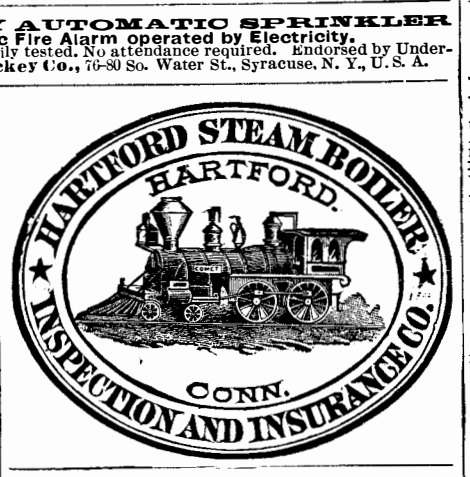

SAWS Wanted 50,000 Sawyers and Lumbermen to send us their full address for a copy of Emerson's ☞ Book of **SAWS.** We are first to introduce NATURAL GAS for heating and tempering **Saws** with wonderful effect upon improving their quality and toughness, enabling us to reduce prices. Address **SAWS**
Emerson, Smith & Co. (Ltd.), Beaver Falls, Pa.

THE PHONOGRAPH.—A DETAILED description of the new and improved form of the phonograph just brought out by Edison. With 8 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **632.** Price 10 cents. To be had at this office and from all newsdealers.

WHITALL'S PLANISPHERES name and locate all Planets, Stars, and Constellations visible at any given minute of time. Write for circular. WM. T. COOPER, Man'g, 307 Race Street, Philadelphia, Pa.

THE CUSHMAN KEY DRILL CHUCK.



This is an improvement over all other chucks of its class and is fully guaranteed.

	DIAM. HOLDS	PRICE
No. 1,	2 in. 0 to ½ in.	$6.50
No. 2,	2½ in. 1-64 to ⅝ in.	8.00

Sold by the trade and Manufactured by THE CUSHMAN CHUCK CO., Hartford, Conn.

ICE-BOATS — THEIR CONSTRUCTION and management. With working drawings, details and directions in full. Four engravings, showing mode of construction. Views of the two fastest ice-sailing boats used on the Hudson river in winter. By H. A. Horsfall, M.E. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **1.** The same number also contains the rules and regulations for the formation of ice-boat clubs, the sailing and management of ice-boats. Price 10 cents.

VIOLIN OUTFITS.

Consisting of Violin, Box, Bow, and Teacher, sent to any part of the United States on 1 to 3 days' trial before buying.

Violin Outfits

at **$4, $8, $15,** and **$25 each.** Send Stamp for beautifully illustrated 96-page catalogue of Violins, Guitars, Banjos, Cornets, Flutes, Strings, all kinds, Harmonicas, Organ Accordeons, Music Boxes, etc. Lowest prices. Mail orders a specialty. **C. W. STORY, 26 Central Street, Boston, Mass.**

ICE and REFRIGERATING MACHINES
The Pictet Artificial Ice Company (Limited), Room 6, Coal & Iron Exchange, New York.

VULCANITE EMERY WHEELS.



Made SOLID of the Celebrated WELLINGTON MILLS EMERY.
SUPERIOR TO ALL OTHERS.
Thousands of manufacturers testify to its being the **Strongest** most **Durable,** and **Healthiest Emery Wheel** made.
RUNS WET or DRY. CUTS COOL and FREE. A SAFE WHEEL.
NEW YORK BELTING AND PACKING CO.,
JOHN H. CHEEVER, Treas. **Warehouse: 15 Park Row, New York.**
Large Wheels made on Cast Iron Centers if desired. Knife Grinding Wheels a Specialty. European Branch: Pickhuben 5, Hamburg.

SYRACUSE MALLEABLE IRON WORKS
W. B. BURNS PROP'R

ELECTRICAL WELDING.—DESCRIPTION of a method of welding by electricity devised by Mr. N. Von Benardos, of St. Petersburg. With 38 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **635.** Price 10 cents. To be had at this office and from all newsdealers.

AUTOMATIC CUT OFF ENGINES. PERFECTLY GOVERNED
MANUFACTURED UPON SCIENTIFIC AND PRACTICAL PRINCIPLES
BALL ENGINE CO. ERIE PA.

VELOCITY OF ICE BOATS. A COLLECTION of interesting letters to the editor of the SCIENTIFIC AMERICAN on the question of the speed of ice boats, demonstrating how and why it is that these craft sail faster than the wind which propels them. Illustrated with 10 explanatory diagrams. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **214.** Price 10 cents. To be had at this office and from all newsdealers.

Scientific Book Catalogue
RECENTLY PUBLISHED.

Our new catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.

MUNN & CO., Publishers Scientific American,
361 Broadway, New York.

ARTESIAN

Wells, Oil and Gas Wells, drilled by contract to any depth, from 50 to 3000 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 600 ft. Send 6 cents for illustrated catalogue. **Pierce Artesian and Oil Well Supply Co.,** 80 Beaver Street, New York.

THE Scientific American
ESTABLISHED 1846.
The Most Popular Scientific Paper in the World.

Only $3.00 a Year, including Postage. Weekly. 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete List of Patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for *one year*—52 numbers—postage prepaid, to any subscriber in the United States or Canada, on receipt of **three dollars** by the publishers; six months, $1.50; three months, $1.00.

Clubs.—Special rates for several names, and to Post Masters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

MUNN & CO.,
361 Broadway, New York.

THE Scientific American Supplement.

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers, and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archæology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, $5.00 a year, or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for $7.00. Single copies 10 cents. Address and remit by postal order, express money order, or check,

MUNN & Co., 361 Broadway, N. Y.,
Publishers SCIENTIFIC AMERICAN.

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming a large and splendid **Magazine of Architecture,** richly adorned with *elegant plates in colors*, and with other fine engravings; illustrating the most interesting examples of modern Architectural Construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with full Plans, Specifications, Sheets of Details, Estimates, etc.

The elegance and cheapness of this magnificent work have won for it the **Largest Circulation** of any Architectural publication in the world. Sold by all newsdealers. $2.50 a year. Remit to

MUNN & CO., Publishers,
361 Broadway, New York.

PRINTING INKS.

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Phila., and 47 Rose St., opp. Duane St., N. Y.

© 1888 SCIENTIFIC AMERICAN, INC.